

McCulloch

7-10 Automatic

Your choice of McCulloch Replacement Sprocket tip bar (shown), roller nose, or hard nose bar, plunge or paddle bows.

Your choice of McCulloch Chisel, Semi-Chisel or Round chain.



40 to 1 gas/oil ratio burns cleaner for more power and economy.

Extra thick chrome cylinder delivers increased horsepower, dissipates heat fast, resists wear.



Self-aligning, floating rim $\frac{3}{8}$ " sprocket lasts longer, minimizes chain wobble for smoother cutting.

Big 4.3 cu. in. engine outperforms many heavier, larger displacement saws.

Adjustable throttle latch for fast, easy and safe starts. Clicks off automatically when you squeeze the trigger.



Plasticized handle frame provides firm, positive grip.

Choke-type diaphragm carburetor with external adjustments.

New, longer starter return spring assures full rope return.

Lightweight power unit (13 lbs.) is more maneuverable, safer, easier to use.

Horizontal engine puts power stroke in line with cutting force to reduce vibration.

Automatic bar and chain oiling plus manual oiler for extra lubrication when needed.



Improved Safe-T-Start™ compression release valve closes automatically when engine starts

All weather ignition delivers fast starts under all cutting conditions.

Large, molded air filter.

7-10 Automatic OUR MOST POPULAR PROFESSIONAL SAW

- Fast cutting 4.3 cu. in power unit weighs just 13 lbs.
- Power and dependability proven in the woods of the world.

This lightweight weighs only 13 lbs.* so you can work longer with less effort. A big 70cc engine really puts out the power. That's why this McCulloch outperforms many heavier saws with bigger engines. Packed with features, the 7-10 Automatic has the dependability pro's insist on. So is it any wonder it is McCulloch's most popular professional saw?

McCULLOCH CUSTOM LUBRICANT

A significant breakthrough in 2-cycle engine lubricants. It mixes with gasoline 3 times easier than conventional SAE 30 wt. oils at all temperatures, even down to -60 F. Yet it does an excellent job of lubricating, use it at 40 to 1 gas/oil ratio. It features superior scuff-resistance, minimizes carbon deposits, rust and wear under all operating conditions. Best for chain saws, outboards, snowmobiles, motor cycles, lawn mowers and industrial use. And it's approved by the Boating Industry Association - meets or exceeds all of their standards.



McCULLOCH CHAIN, BAR & SPROCKET OIL

Special anti-wear formula can give up to double chain life. Special "MOLY" additive gives extra lubrication protection during critical first seconds of cutting. Extra "tackiness" makes oil cling to chain at high speeds for better lubrication, less waste. Also contains new "anti-gum" additive to keep cutting fast and smooth even in green, sappy wood.




McCULLOCH CHAIN, BARS & SPROCKETS


McCulloch chains come in every popular type pitch, gauge and configuration a pro could ask for. And they're the finest quality chain available. Super Pro full chisel is the chain most pros prefer for big timber cutting. McCulloch Super Pro is available in both round and square filed cutters.

Speed Mac, semi chisel cutter is rapidly gaining world-wide popularity because it has the cutting attributes of chisel chain, smooth, extended stay-sharp characteristics, combined with easy maintenance.

Pro Mac, the finest round chain on the market is the best chain for all-round use.

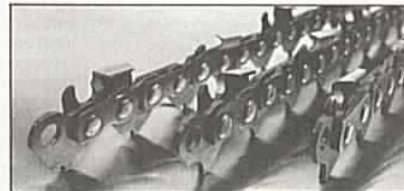

McCulloch guide bars are specially contoured to fit precisely, hardened to resist wear, and machined from strong metals. Our Speed Mac - Sprocket Nose Bar - ranks highest in cutting performance because reduced friction delivers more power to the cutter teeth. Our Super Pro - Roller Nose Bar - ranks next highest in cutting performance with all of the long life/performance benefits. Our Mac, Pro Mac, Mac 10 and Mac 6 - Hardface Nose Bars - feature nose rails hardened with space age steel alloy to make the bar last longer.

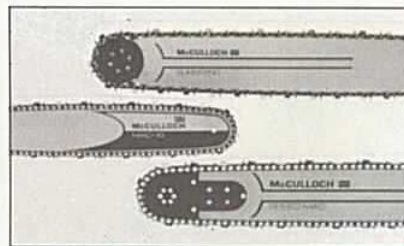

We also have a complete line of sprockets, drums and rims for every cutting need. Our new Super Pro Sprocket is a self-aligning rim sprocket with a "floating" rim which is interchangeable without having to replace the drum. We also have "Fixed Rim," Clover Leaf Spur Type with Drum and Spur Type Sprockets - all precision made for long life.



FEATURES AND SPECIFICATIONS:

7-10 Automatic Direct Drive	
Weight*	13 lbs (5.9 kg)
Guide Bar	McCulloch bows, roller nose, sprocket nose, & hard faced bars available
Overall Dimensions (outside frame)	10" H x 15" L x 9 1/2" W (254 x 381 x 241 mm)
Muffler	Flush cut design "Spark Arrester"
Easy Starting	Easy Pull QSP Starter, Automatic Rewind with nylon rope
Bar/Chain Diling	Automatic plus manual
Handle Frame	Plasticized handle bar grip (flush-cut design) and rubber insert in pistol grip.
Displacement	4.3 cu in (70.5cc)
Carburetor	Diaphragm type with choke. Fully enclosed. External adjustments
Filter Systems	Felt fuel filter. Rubber edged flocked screen air filter
Fuel - Oil Mixture	40:1 w/McCulloch Custom Lubricant
Fuel Tank Capacity	1.5 US pints (0.71 L)
Clutch Engaging Speed	3,000 RPM
Chain Oiler Capacity	.6 US pints (0.28 L)
Ignition	McCulloch waterproof high tension magneto
Coil Location	Outside flywheel. Fan cooled
	Gap .025" (0.635mm)
Chain: McCulloch round, semi-chisel or full chisel	.375" pitch (9.52mm)
Sprocket	.058" gauge (1.47mm)
	7 tooth, .375" pitch (9.52mm) rim type
	floating rim type

*Power Unit Only less cutting attachments

ACCESSORIES:

Spark arrester screen, Part No. 89431
Sound silencer muffler kit for maximum noise reduction, Part No. 68191
Rugged double-walled carrying case, Part No. 89044. (16" bar maximum)



McCULLOCH The All American Chain Saw

McCulloch Corporation, 6101 West Century Blvd., Los Angeles, California 90045
Lake Havasu City, Arizona • Malton, Ontario, Canada • Mechelen, Belgium
Singapore • Seven Hills, N.S.W., Australia • São Paulo, Brazil