




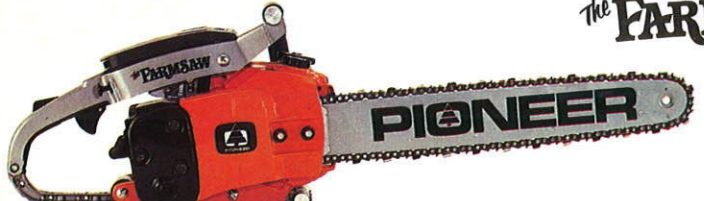



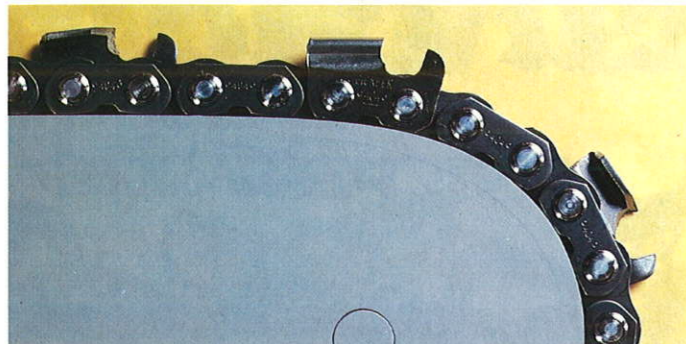


MODEL	FEATURES	ATTACHMENTS
 <p>P12 / P12s</p> <p>* CHAIN BRAKE ON ALL "S" MODELS - OPTIONAL</p> 	<p>P12/P12S • DISPLACEMENT (in./cc): 2.1"/34 cc • DRY WEIGHT (lb./kg): 7.5 lb./3.4 kg - "S" 8.2 lb./3.7 kg • IGNITION: breakerless • SPARKPLUG: CJ6/GAP - .025" • STARTER: Pawl type • FUEL CAPACITY: 10.5 (imp. fl. oz.) - 10.1 (U.S. fl. oz.) - .3 (litres) • OIL CAPACITY: 4.2 (Imp. fl. oz.) - 4.1 (U.S. fl. oz.) - .12 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 2 shoes • MUFFLER: Spark arrest screen • CHAIN OILING: auto/manual • CARBURETOR: Walbro.</p>	<p>P12/P12S • GUIDE BAR (Type): SPROCKET Nose • LENGTH RANGE (in./cm): 12"/14" - "S" 12"/14" - 30 cm/35 cm • SPROCKET: STAR 3/8" / 7 teeth • CHAIN: .050" - 3/8" LP.</p>
 <p>1074</p>	<p>1074 • DISPLACEMENT (in./cc): 3.1"/51 cc • DRY WEIGHT (lb./kg): 11 lb./4.9 kg • IGNITION: Breaker points • SPARKPLUG: CJ8/GAP - .030" • STARTER: Bendix "Easy-Arc" • FUEL CAPACITY: 16 (Imp. fl. oz.) - 15.4 (U.S. fl. oz.) - .455 (litres) • OIL CAPACITY: 5.1 (Imp. fl. oz.) - 4.9 (U.S. fl. oz.) - .145 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 2 shoes • MUFFLER: Baffle plate • CHAIN OILING: Automatic • CARBURETOR: Walbro.</p>	<p>1074 • GUIDE BAR (type): SPROCKET Nose • LENGTH RANGE (in./cm): 14"/16" - 35 cm/40 cm • SPROCKET: STAR .325" / 8 teeth • CHAIN: .058" - .325".</p>
 <p>P26</p>	<p>P26 • DISPLACEMENT (in./cc): 3.1"/51 cc • DRY WEIGHT (lb./kg): 11 lb./4.9 kg • IGNITION: Breakerless • SPARKPLUG: KCJ7Y/GAP .030" • STARTER: Bendix "Easy-Arc" • FUEL CAPACITY: 16 (Imp. fl. oz.) - 15.4 (U.S. fl. oz.) - .455 (litres) • OIL CAPACITY: 5.1 (Imp. fl. oz.) - 4.9 (U.S. fl. oz.) - .145 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 3 shoes • MUFFLER: Spark arrest screen • CHAIN OILING - Automatic • CARBURETOR: Tillotson.</p>	<p>P26 • GUIDE BAR (Type): SPROCKET Nose • LENGTH RANGE (in./cm): 16"/40 cm • SPROCKET: STAR .325" / 8 teeth • CHAIN: .058"/.325".</p>
 <p>P28 / P28s</p>	<p>P28/P28S • DISPLACEMENT (in./cc): 3.1"/51 cc • DRY WEIGHT (lb./kg): 12.8 lb./5.8 kg - "S" 14 lb./6.4 kg • IGNITION: Breakerless • SPARKPLUG: KCJ7Y/GAP: .030" • STARTER: Bendix "Easy-Arc" • FUEL CAPACITY: 16 (Imp. fl. oz.) - 15.4 (U.S. fl. oz.) - .455 (litres) • OIL CAPACITY: 5.1 (Imp. fl. oz.) - 4.9 (U.S. fl. oz.) - .145 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 3 shoes • MUFFLER: Spark arrest screen • CHAIN OILING: Automatic • CARBURETOR: Tillotson.</p>	<p>P28/P28S • GUIDE BAR (Type): SPROCKET Nose • LENGTH RANGE (in./cm): 16"/40 cm • SPROCKET: STAR .325" / 8 teeth. • .058"/.325".</p>
 <p>The FARMSAW/s</p>	<p>FARMSAW/FARMSAW "S" • DISPLACEMENT (in./cc): 3.97"/65 cc • DRY WEIGHT (lb./kg): 14.8 lb./6.7 kg - "S" 16 lb./7.3 kg • IGNITION: Breakerless • SPARKPLUG: RCJ8/GAP - .030" • STARTER: Bendix "Easy-Arc" • FUEL CAPACITY: 27.1 (Imp. fl. oz.) - 26.0 (U.S. fl. oz.) - .770 (litres) • OIL CAPACITY: 13.0 (Imp. fl. oz.) - 12.5 (U.S. fl. oz.) - .370 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 3 shoes • MUFFLER: Spark arrest screen • CHAIN OILING: Adjustable automatic • CARBURETOR: Tillotson.</p>	<p>FARMSAW/FARMSAW "S" • GUIDE BAR (Type): SPROCKET Nose • LENGTH RANGE (in./cm): 18"/46 cm • SPROCKET: STAR 3/8" / 7 teeth • CHAIN: .058/3/8".</p>
 <p>P41 / P41s</p>	<p>P41/P41S • DISPLACEMENT (in./cc): 3.97"/65 cc • DRY WEIGHT (lb./kg): 15.6 lb./7.1 kg - "S" 16.6 lb./7.5 kg • IGNITION: C.D. • SPARKPLUG: KCJ7Y/GAP - .030" • STARTER: Pawl type • FUEL CAPACITY: 27.1 (Imp. fl. oz.) - 26.0 (U.S. fl. oz.) - .770 (litres) • OIL CAPACITY: 13.0 (Imp. fl. oz.) - 12.5 (U.S. fl. oz.) - .370 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 3 shoes • MUFFLER: Spark arrest screen • CHAIN OILING: Adjustable Automatic • CARBURETOR: Tillotson.</p>	<p>P41/P41S • GUIDE BAR (Type): Hard or Sprocket Nose • LENGTH RANGE (in./cm): 16"/28" - 40 cm/70 cm • SPROCKET: RIM 3/8" / 8 teeth on half handle and 7 teeth on full handle • CHAIN: .058" - 3/8</p>
 <p>P51 / P51s</p>	<p>P51/P51S • DISPLACEMENT (in./cc): 5"/82 cc • DRY WEIGHT (lb./kg): 17.7 lb./8.0 kg - "S" 18.6 lb./8.4 kg • IGNITION: C.D. • SPARKPLUG: KCJ7Y/GAP - .030" • STARTER: Pawl type • FUEL CAPACITY: 33.1 (Imp. fl. oz.) - 31.8 (U.S. fl. oz.) - .940 (litres) • OIL CAPACITY: 14.3 (Imp. fl. oz.) - 13.7 (Imp. fl. oz.) - .405 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 3 shoes • MUFFLER: Spark arrest screen • CHAIN OILING: Adjustable Automatic • CARBURETOR: Walbro.</p>	<p>P51/P51S • GUIDE BAR (Type): Hard or Sprocket nose • LENGTH RANGE (in./cm): 16"/32" - 40 cm/80 cm • SPROCKET: RIM - 3/8" / 7 teeth • CHAIN: .058" - 3/8".</p>
 <p>P61 / P61s</p>	<p>P61/P61S • DISPLACEMENT (in./cc): 6"/98 cc • DRY WEIGHT (lb./kg): 17.9 lb./8.1 kg • IGNITION: C.D. • SPARKPLUG: KCJ7Y/GAP - .030" • STARTER: Pawl type • FUEL CAPACITY: 33.1 (Imp. fl. oz.) - 31.8 (U.S. fl. oz.) - .940 (litres) • OIL CAPACITY: 14.2 (Imp. fl. oz.) - 13.7 (U.S. fl. oz.) - .405 (litres) • FUEL OIL MIX: 24:1 • CLUTCH: 3 shoes • MUFFLER: Spark arrest screen • CHAIN OILING: Adjustable Automatic plus manual • CARBURETOR: Tillotson.</p>	<p>P61/P61S • GUIDE BAR (Type): Hard or Sprocket nose • LENGTH RANGE (in./cm): 20"/36" - 50 cm/90 cm • SPROCKET: RIM .404" / 7 teeth • CHAIN: .058" - 3/8 - .404"</p>


PIONEER

SAW CHAIN



PIONEER "DURASPEED,"[®] SAW CHAIN (REGULAR) • Pioneer has been designing and building their own saw chain for over 25 years.

- The combination of the highest quality alloy steels, modern metallurgy and superior design make Pioneer saw chains stay sharper and last longer. That's why professional loggers insist on Pioneer saw chain.
- With Pioneer Duraspeed saw chain on your saw – you are getting cutting performance on the job.

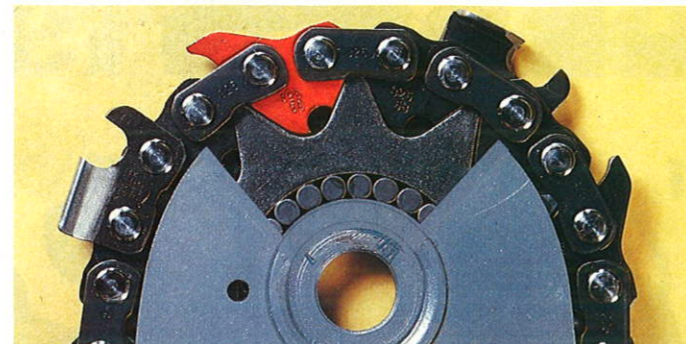

PIONEER "DURAGUARD"[®] SAW CHAIN (ANTI KICK) • Exclusive Pioneer Duraguard anti-kick saw chain is the anti-kick chain preferred by professionals.

- Duraguard chain is smoother, faster and easier to file than other designs.
- When you use Duraguard chain, you'll discover that its unique design includes cutting performance whether tipping, boring or limbing.
- The special placement of the Anti-Kick centre drive link ensures increased performance and reduced hazard from unexpected kickback.



PIONEER ACCESSORIES

* The Pioneer name of any accessory item is your insurance that it has been carefully tested to meet exacting standards of performance and service life. Be sure to specify and insist on top quality "job matched" accessories from your Pioneer Servicing Dealer!

A WORD ABOUT PIONEER SERVICE Whether you are a homeowner using a Pioneer Chainsaw on a weekend - or a big timber pro cutter... no chainsaw is any better than the service organization behind it. From simple adjustments to major overhauls - your Pioneer Servicing Dealer is the man to trust. You will generally find that he "services what he sells" and does it well. Ample service parts stock are available around the world and usually cost less than equivalent parts on other brands. These facts add up to what we like to call **PIONEER SUPER SERVICE**.

PIONEER

PIONEER CHAINSAW CORPORATION INC.
775 NEAL DR., PETERBOROUGH, ONTARIO, CANADA, K9J6X7.

PIONEER


PIONEER CHAINSAW CORPORATION INC.,
2535 UNITED LANE, ELK GROVE VILLAGE, ILLINOIS 60007.

PIONEER

PIONEER CHAINSAW CORPORATION NV,
PATHOEKEWEG 30, 8000 BRUGGE, BELGIUM.

Because of its policy of constant product improvement, PIONEER retains the right to change without notice, the models and specifications described in this catalogue, at any time and without obligation.

PIONEER

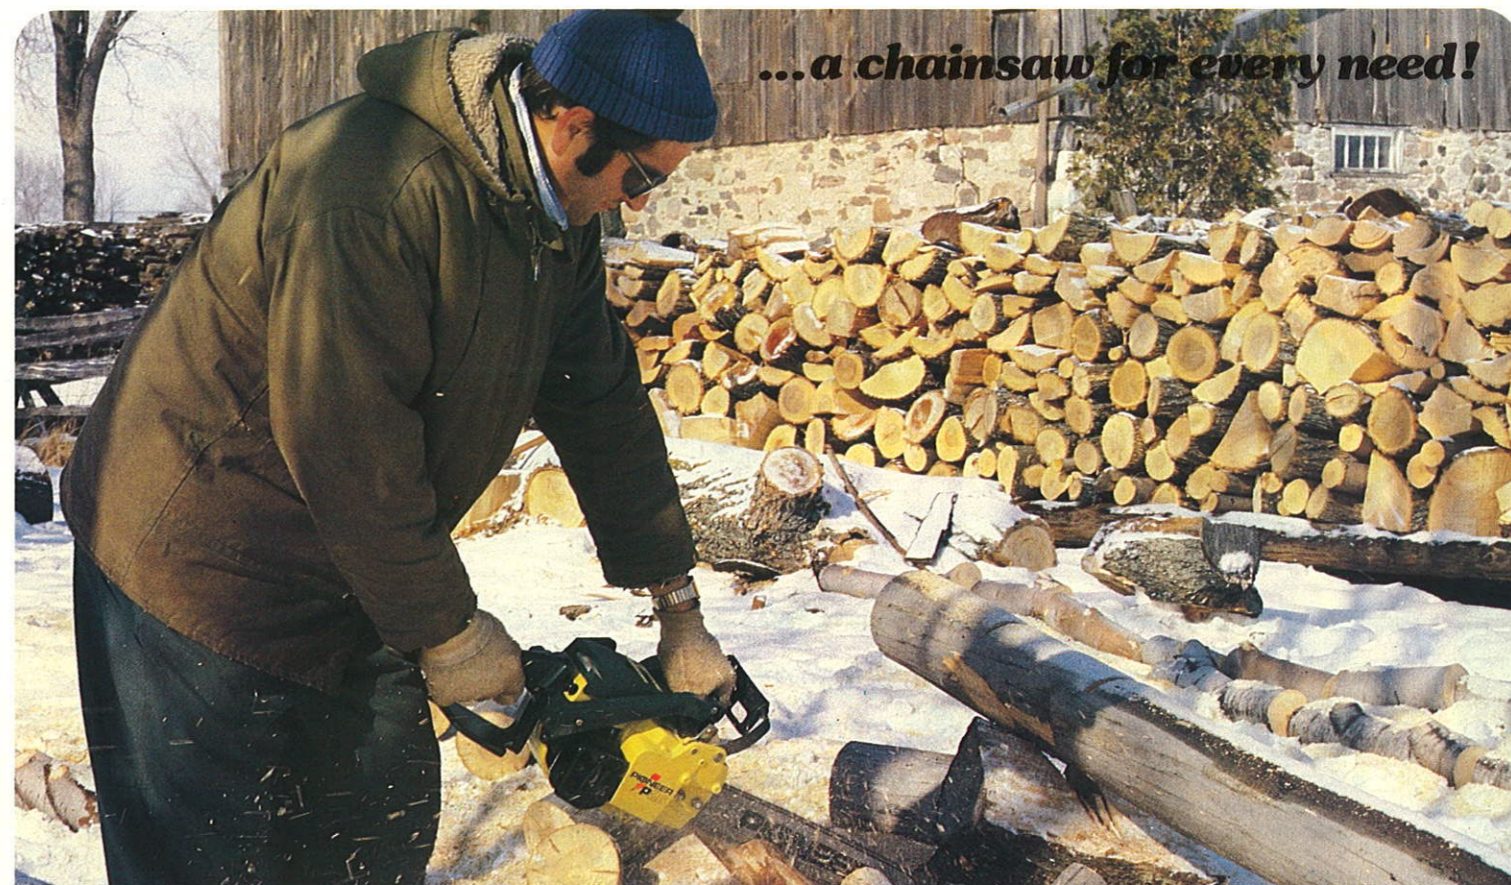

Printed in Belgium by Mercator Press, PCSSC-80/81-E

PIONEER

...a chainsaw

P12/ P12s



- P12** • Only 7.5 lbs./3.4 kg*, easy handling, homeowner's chainsaw - with dependability plus!
- Ample engine power (2.1 cu. in./34 cc) for rugged, cool running performance.
 - Finger tip controls mean easier, safer and simpler operation.
 - Extra value features include electronic ignition for fast, reliable starting and worry-free automatic plus manual bar and chain oiling.
- P12S** • The P12S deluxe model features vibration isolated engine for reduced operator fatigue and a chain brake for added safety

1074



- 1074** • Only 11 lbs./4.9 kg*, light and reliable for the homeowner.
- A 3.1 cu. in./51 cc engine for extra power and performance at a realistic price.
 - Supplied with 14"/35 cm sprocket nose guide bar.
 - Automatic Compression Release means fast, easy starting and longer starter life.
 - Gear driven automatic bar and chain oiling automatically adjusts oil flow in direct proportion to chain speed.
 - Professional hand spacing maximizes control and handling.

P26



- P26** • Only 11 lbs./4.9 kg*, field proven performance in a simple dependable package.
- The 3.1 cu. in./51 cc, "fully jewelled" engine with electronic ignition provides faster starting and maximum power.
 - Handles 16"/40 cm sprocket nose guide bar.
 - Dual chambered muffler effectively lowers noise level and has approved spark arrestor screen and muffler guard for lower surface temperatures.
 - Extra value features include oversize air filter for ample intake air, automatic compression release for easier starting and reduced starter wear and combination front hand guard/pivot grip for improved protection and cutting control.



P28/ P28s



- P28/P28S** • Only 12.8 lbs./5.8 kg*.
- Features a 3.1 cu. in./51 cc engine.
 - Comes with 16"/40 cm sprocket nose guide bar.
 - This top-of-the-line utility chainsaw incorporates all the features of the popular P26 - PLUS an effective 4-point vibration isolation system.
 - Standard equipment, includes a throttle trigger interlock to prevent unintentional engine acceleration, rear hand guard to protect the control hand and a chain catching post to arrest possible broken or "flipped-off" chain.
 - P28S model includes all of the above features plus a combination front hand guard and chain brake to reduce hazard from "kickback".


- THE FARMSAW** • C
- The 4 cu. in./65 cc ru
 - ample power for "A
 - wood cutting.
 - An 18"/46 cm spro
 - equipment.
 - Features include auto
 - tronic ignition, 6-p
 - adjustable automati
 - Deluxe version of Fa
 - and rear hand guar

...the Casual ...the Farm ...the Professional

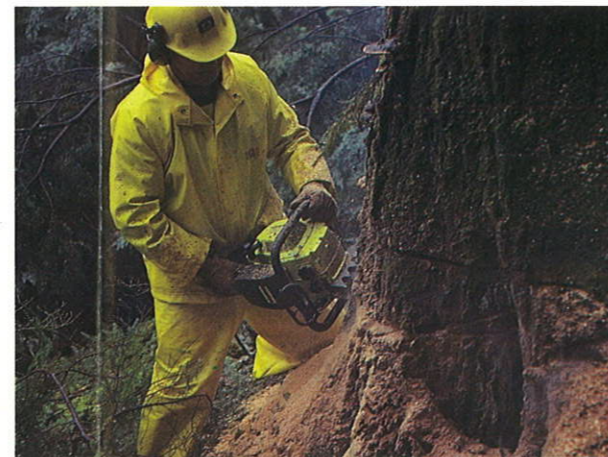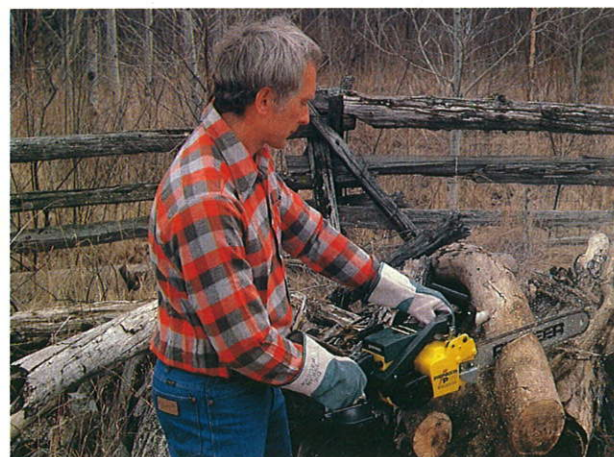

6-POINT AV SYSTEM

Pioneer's vibration dampening system provides positive control for increased production. Six carefully positioned isolators on Pioneer pro models practically eliminate tiring engine and cutting vibrations. The six identical rubber mounts are easy and inexpensive to replace.

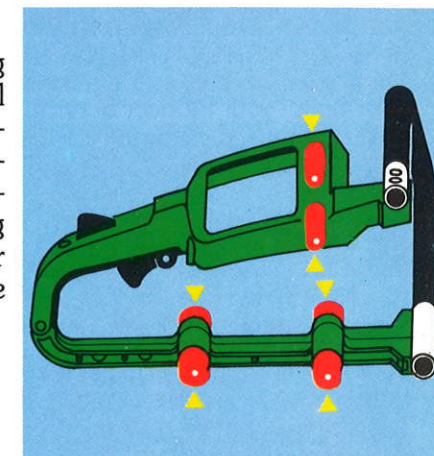

saw for every need!

the **FARMSAW/s**



P41/P41s

Only 14.8 lbs./6.7 kg*.
Tugged field proven engine provides
"round the farm" and serious fire-

cket nose guide bar is standard

omatic compression release, Elec-
point vibration isolation system,
: bar and chain oiling.

rmsaw includes both chain brake
d for added operator protection.

P41/P41S • A 15.6 lbs./7.1 kg* professional package is
the professional saw for heavy pulpwood and light
timber cutting.

- The dependable 4 cu. in./65 cc engine handles guide bars from 16"-28"/40-70 cm with ease.
- Extra value features include electronic ignition, 6-point vibration isolation system, adjustable automatic bar and chain oiling, trigger interlock, rear hand guard and intake noise reduction system.
- The /41S includes all of the above PLUS the chain brake for increased protection against kickback hazards.

P51/P51s



P51/P51S • A dependable 17.7 lbs./8.0 kg* "power-
house", the professional logger's choice for heavy duty
falling and bucking.

- The smooth, powerful 5 cu. in./82 cc engine really performs with guide bars from 16"-32"/40-80 cm.
- Standard equipment includes - Electronic Ignition, 6-point vibration isolation system, adjustable automatic bar and chain oiling, trigger interlock, rear hand guard and intake noise reduction system.
- The P51S includes all of the above - PLUS the increased protection from kickback provided by Pioneer's chain brake.

P61/P61s



P61/P61S • Only 17.9 lbs./8.1 kg* for extra heavy duty
cutting.

- High performance 6 cu. in./98 cc engine.
- Easily handles guide bars from 20"-36"/50-90 cm with optional 3/8" or .404 pitch sprocket.
- Includes all of Pioneer's field proven features that range from the 6-point vibration isolation to electronic (CD) ignition, die cast muffler guard, to adjustable automatic bar and chain oiling, plus manual override oiler, and efficient noise reduction.
- Outstanding dependability and value in a simple, functional professional tool.
- The P61 is available with Pioneer's optional chain brake kit for added operator protection against kickback hazards.


* Weights shown are for Pioneer
Unit only - (less bar and chain)

* CHAIN BRAKE ON ALL
"S" MODELS - OPTIONAL

•Engineering Qualities.


EASY ARC STARTING (1074, P26, P28, P28S, Farmsaw)

Pioneer's exclusive Automatically
Reduced Compression system
gives faster, easier starts in any
weather. This automatic system
extends the starter life and helps
to clear the engine if you over-
choke.

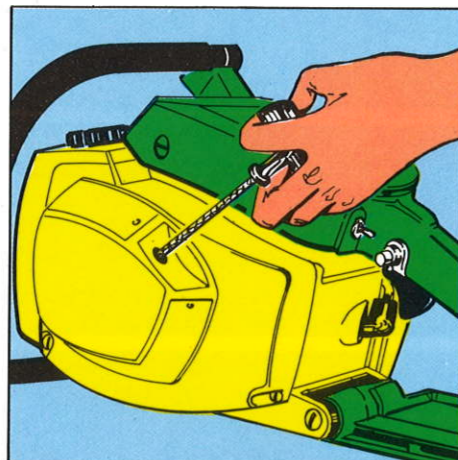


AUTOMATIC BAR AND CHAIN OILING

Pioneer's automatic system assu-
res positive bar and chain oiling.
A uniquely designed system auto-
matically increases oil delivery pro-
portional to chain speed. A patent-
ed "drive release" prevents dama-
ge to self-lubricated drive gear.
Oil tank capacity is matched to the
running time of each tankful of
fuel.

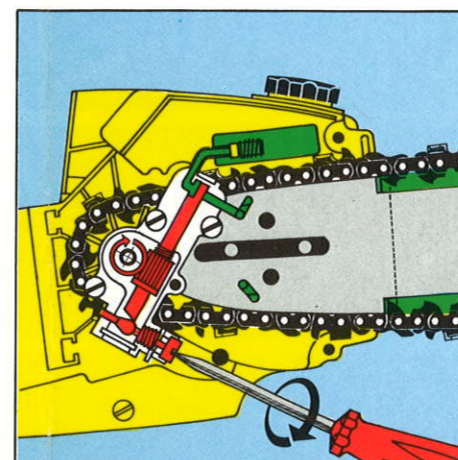

CHAIN BRAKE (ALL "S" MODELS)

A safety feature to protect opera-
tors should sudden kickback occur.
Hand contact with the front hand
guard triggers the chain stopping
mechanism instantly. An outstan-
ding optional safety feature.

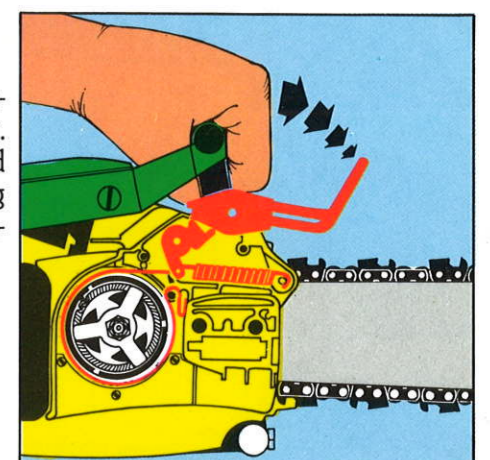

PIONEER ...the Chainsaw people!

EER

...a chainsaw for every need!



P26 • Only 11 lbs./4.9 kg*, field proven performance in a simple dependable package. The 3.1 cu. in./51 cc, "fully jewelled" engine with electronic ignition provides faster starting and maximum power. Handles 16"/40 cm sprocket nose guide bar. Dual chambered muffler effectively lowers noise level and has approved spark arrestor screen and muffler guard for lower surface temperatures. Extra value features include oversize air filter for ample intake air, automatic compression release for easier starting and reduced starter wear and combination front hand guard/pivot grip for improved protection and cutting control.


P28/P28S • Only 12.8 lbs./5.8 kg*.
 • Features a 3.1 cu. in./51 cc engine.
 • Comes with 16"/40 cm sprocket nose guide bar.
 • This top-of-the-line utility chainsaw incorporates all the features of the popular P26 - PLUS an effective 4-point vibration isolation system.
 • Standard equipment, includes a throttle trigger interlock to prevent unintentional engine acceleration, rear hand guard to protect the control hand and a chain catching post to arrest possible broken or "flipped-off" chain.
 • P28S model includes all of the above features plus a combination front hand guard and chain brake to reduce hazard from "kickback".

THE FARMSAW • Only 14.8 lbs./6.7 kg*.
 • The 4 cu. in./65 cc rugged field proven engine provides ample power for "Around the farm" and serious fire-wood cutting.
 • An 18"/46 cm sprocket nose guide bar is standard equipment.
 • Features include automatic compression release, Electronic ignition, 6-point vibration isolation system, adjustable automatic bar and chain oiling.
 • Deluxe version of Farmsaw includes both chain brake and rear hand guard for added operator protection.


P41/P41S • A 15.6 lbs./7.1 kg* professional package is the professional saw for heavy pulpwood and light timber cutting.
 • The dependable 4 cu. in./65 cc engine handles guide bars from 16"-28"/40-70 cm with ease.
 • Extra value features include electronic ignition, 6-point vibration isolation system, adjustable automatic bar and chain oiling, trigger interlock, rear hand guard and intake noise reduction system.
 • The /41S includes all of the above PLUS the chain brake for increased protection against kickback hazards.

P51/P51S • A dependable 17.7 lbs./8.0 kg* "house", the professional logger's choice for falling and bucking.
 • The smooth, powerful 5 cu. in./82 cc engine performs with guide bars from 16"-28"/40-70 cm with ease.
 • Standard equipment includes - Electronic ignition, 6-point vibration isolation system, adjustable automatic bar and chain oiling, trigger interlock, rear hand guard and intake noise reduction system.
 • The P51S includes all of the above - PLUS a chain brake for increased protection against kickback hazards.


...the Professional

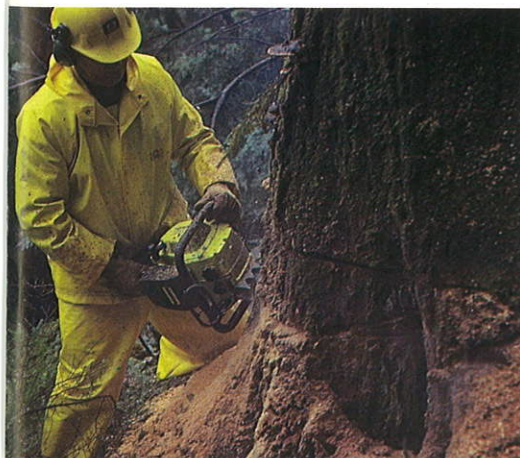

6-POINT AV SYSTEM
 Pioneer's vibration dampening system provides positive control for increased production. Six carefully positioned isolators on Pioneer pro models practically eliminate tiring engine and cutting vibrations. The six identical rubber mounts are easy and inexpensive to replace.

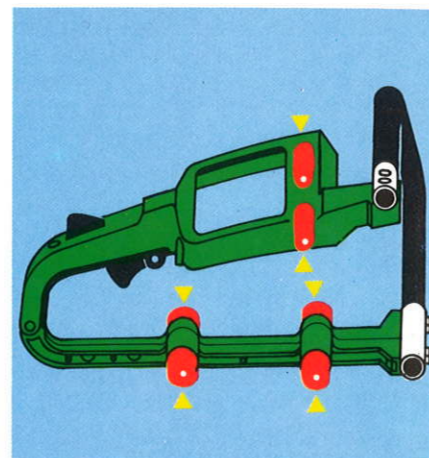

EASY ARC STARTING (1074, P26, P28, P28S, Farmsaw)
 Pioneer's exclusive Automatically Reduced Compression system gives faster, easier starts in any weather. This automatic system extends the starter life and helps to clear the engine if you over-choke.

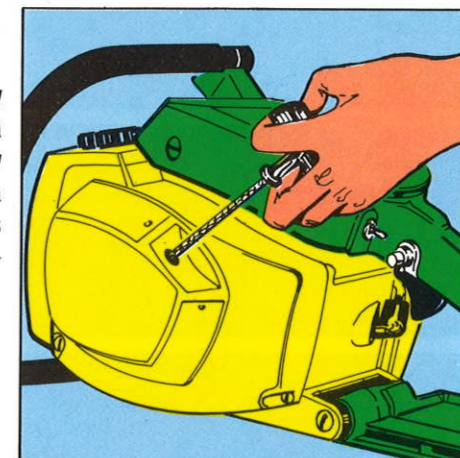

...Engineer

AUTOMATIC BAR AND CHAIN OILING
 Pioneer's automatic system assures positive bar and chain oiling. A uniquely designed system automatically increases oil delivery proportional to chain speed. A patented "drive release" prevents damage to self-lubricated drive gear. Oil tank capacity is matched to the running time of each tankful of fuel.