


# *Brushcutter- Weedcutter*

OPERATING  
INSTRUCTIONS

AND

ILLUSTRATED  
PARTS  
LIST

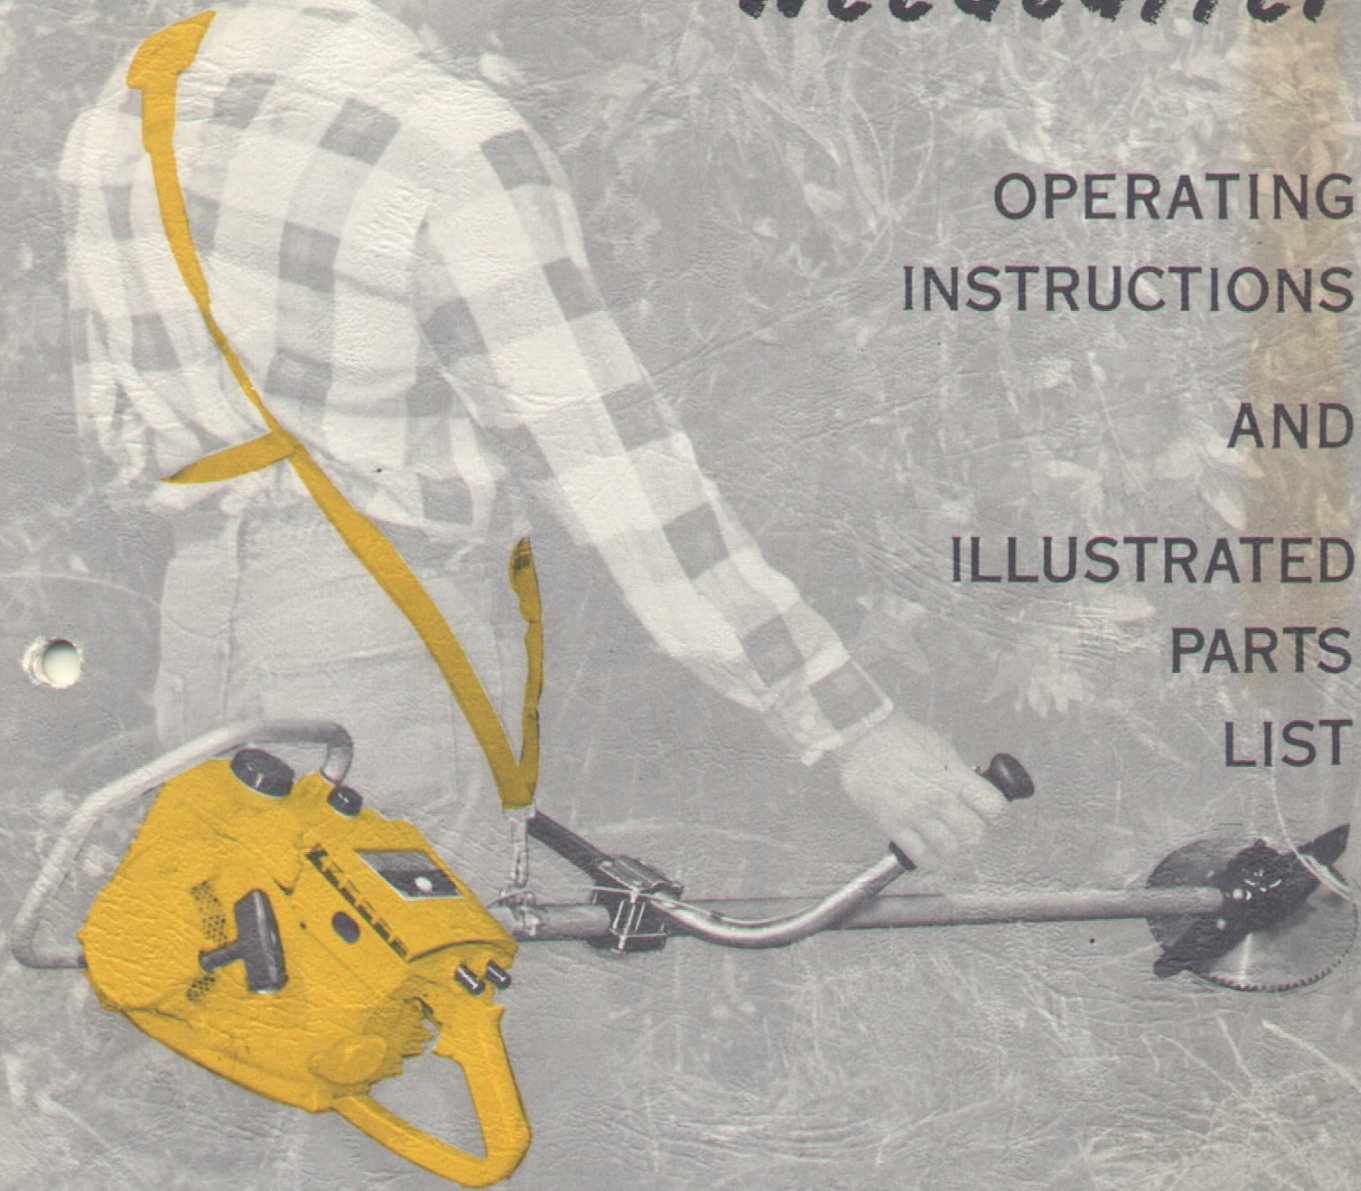

**MCCULLOCH CORPORATION**  
8101 West Century Boulevard,  
Los Angeles 45, California

COPYRIGHT - 1962  
REVISED EDITION  
COPYRIGHT - 1964  
MCCULLOCH CORPORATION

NO. 61199B  
MANUFACTURER'S SUGGESTED LIST PRICE - 50 CENTS



### POWER TOOL ACCESSORIES WARRANTY

We warrant to each original retail purchaser (hereinafter called "Purchaser") each part of each new McCulloch power tool accessory to be free from defects in material and/or workmanship for a period of thirty (30) days from date of sale to the Purchaser, provided that such power tool accessory is used and maintained in accordance with the booklet or instruction sheet provided with the same.

Our obligation under this Warranty is limited to supplying, without charge to such Purchaser, a genuine replacement part in exchange for any part which, in our sole judgment, is defective, if the part is returned for our examination, at Purchaser's expense, through an authorized McCulloch Power Tool Dealer or McCulloch Power Tool Distributor.

This Warranty shall not apply to any new McCulloch power tool accessory or any such part thereof, which (1) has been subject to misuse, negligence, accident, or tampering; (2) has been altered or repaired by any other than an Authorized McCulloch Power Tool Dealer; (3) has been repaired by the use of other than McCulloch or McCulloch-approved parts; (4) has been operated with other than McCulloch or McCulloch-approved power units; or (5) has been operated in any other way than in accordance with said booklet or instruction sheet.

This Warranty is expressly in lieu of all other warranties, express or implied. We do not assume, or authorize any person to assume for us, any other obligation or liability in connection with the sale of McCulloch power tool accessories.

McCULLOCH CORPORATION

# MCCULLOCH



## BRUSH CUTTER AND WEED CUTTER ATTACHMENTS

The McCulloch Brush Cutter and Weed Cutter are auxiliary cutting attachments designed for the fast, safe clearing of brush growth and weeds. The complete assembly consists of a 57600A Drive Unit and an optional 57610 Brush Cutter Kit or optional 57630 Weed Cutter Kit. The combination Drive Unit and Brush Cutter or Weed Cutter Attachment can be installed on McCulloch power units of the general size and design of 1-40 or 1-50 Series engines. A vented fuel cap must be used when the Brush Cutter or Weed Cutter Attachment is installed.

### DRIVE UNIT

The sturdy, lightweight Drive Unit transmits the engine power to the cutting attachments. Included in the Drive Unit is a Drive Shaft, a Gear Housing Assembly, a Handle and Control Assembly, and two Accessory Kits: a Loose Parts Kit and a Conversion Kit.

The Loose Parts Kit contains all the parts necessary for installing the Handle and Control Assembly on the Drive Unit; the Conversion Kit is used when converting a chain saw engine to Brush Cutter or Weed Cutter operation. The Illustrated Parts List on page 11 shows the contents of both Accessory Kits.

### CUTTING ATTACHMENTS

The Brush Cutter or Weed Cutter Attachment (whichever is installed) mounts on the gear shaft in the gear housing and is driven by a bevel and pinion gear in the housing.

The Brush Cutter Attachment, while designed for the speedy clearing of brush, can also be used for low-level limbing and for the felling of small trees up to six inches in diameter.

The Weed Cutter Attachment includes a Special Guard Assembly to protect the operator from the annoyance of pebbles, sticks

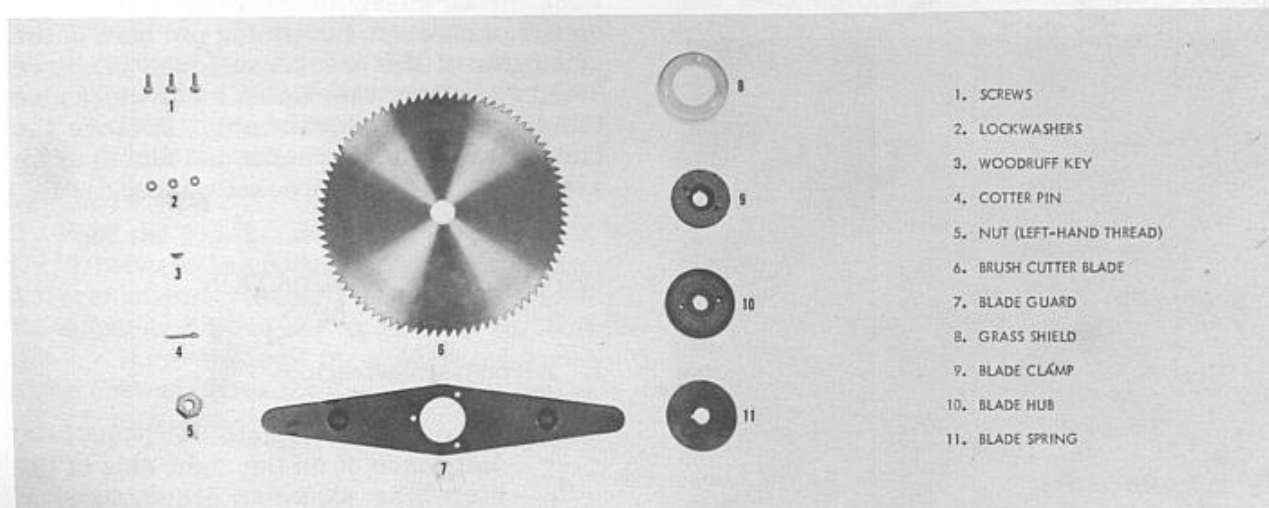


Figure 1. Brush Cutter Attachment 57610

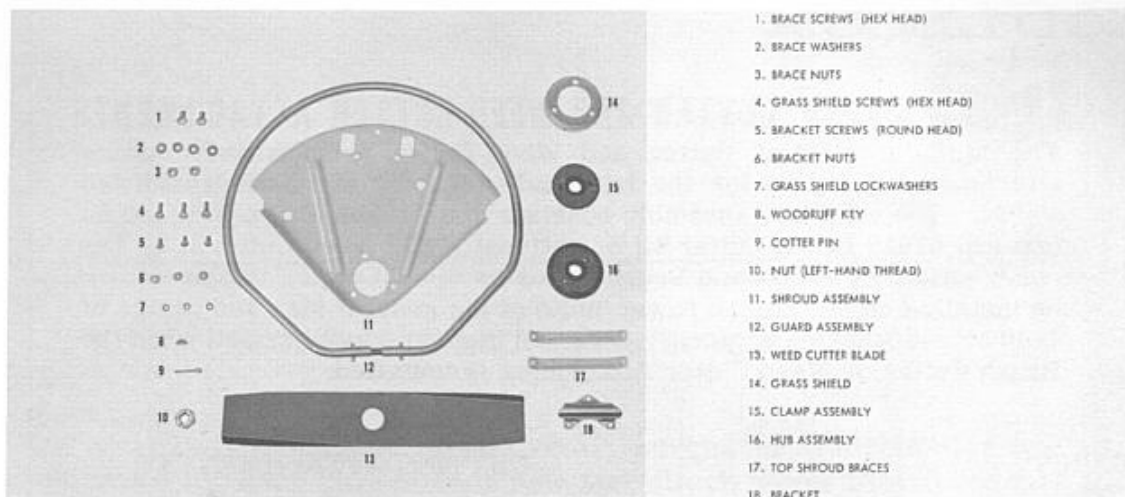


Figure 2. Weed Cutter Attachment Kit 57630

and other small objects thrown backwards by the rotation of the cutter blade. Figures 1 and 2 show the parts contained in the Brush Cutter and Weed Cutter Attachment Kits.

#### NOTE

To make installation of the Drive Unit and Cutter Attachments easier, all the screws, nuts, washers, and gaskets are identified by part number in separate envelopes in the two Kits which are included with the Drive Unit.

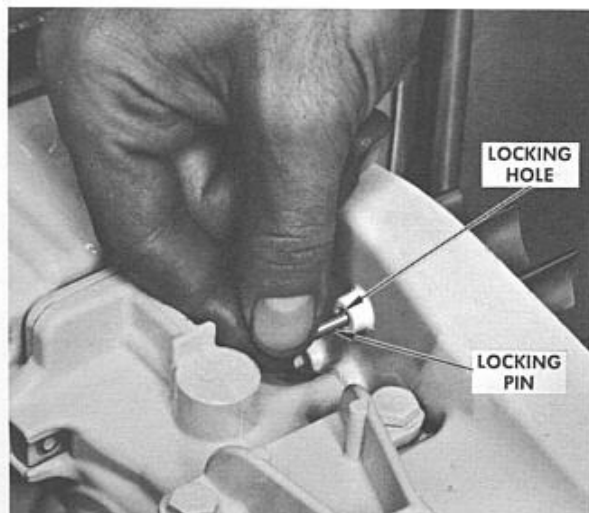


Figure 3. Locking Flywheel

#### ADAPTING CHAIN SAW ENGINE

To adapt your chain saw for use with the Brush Cutter or Weed Cutter Attachments, carefully follow the instructions below.

Remove the starter assembly, fan housing, clutch guard, muffler, frame, bar adjusting screw, air cleaner cover assembly, and air cleaner screen.

Lock the flywheel by inserting a small pin or screw through the timing pin hole in the underside of the crankcase cover (Figures 3 and 4). Turn the clutch rotor clockwise to loosen the clutch assembly. Remove the clutch assembly, sprocket and clutch drum assembly, and the sprocket washer.

#### DRIVE UNIT INSTALLATION

##### 1. Airbox Modification:

- a. Cut out the Template, P/N 50448B, and place it on the right side of the airbox as shown in illustration on template sheet. Center-punch the three holes and remove the Template.

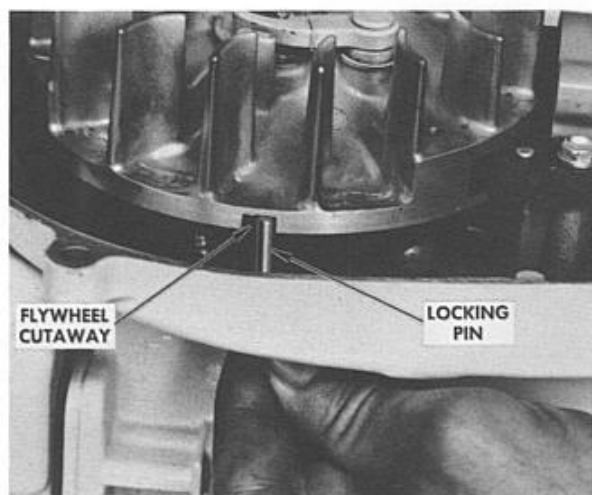


Figure 4. Locking Pin Cutout in Flywheel (Fan Housing Removed)

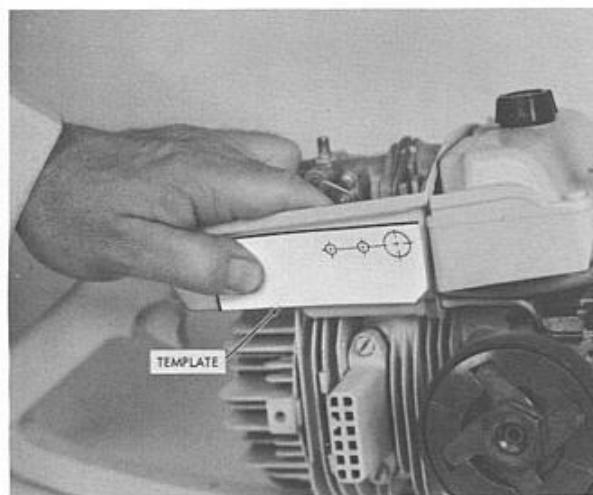


Figure 5. Air Box Modification

- b. Place a small block of wood between the right side of the airbox and the carburetor and a grease-coated cloth between the block of wood and the right side of the carburetor. The cloth will catch the metal drillings and the wood will protect the carburetor when the drill pushes through the airbox wall.
  - c. Drill the large hole with a 1/2-inch drill. Drill the two smaller holes with a No. 4 drill (0.209-inch diameter). File off the sharp edges around the drilled holes. Remove the cloth and the block of wood and clean the metal scraps off the outside of the airbox.
2. Feed the 9-1/2-inch Shut-off Wire (P/N 57466) between the bottom of the airbox and the crankcase cylinder cooling fins, from the exhaust side of the engine to the coil side. Clamp the coil terminal (on the end of the Shut-off Wire) on the terminal on the coil (Figure 6).
  3. Remove the fuel vent orifice assembly from the bar mounting pad and install the Fuel Tank Vent Plug (P/N 57595). See Figure 17. Install the Cover Plate Gasket

(P/N 57437), Cover Plate (P/N 50485), and the Spacers (P/N 50484) on the bar mounting nuts and secure with two hex nuts (P/N 103729) (see Figure 17).

4. Install the Accessory Adapter on the engine crankcase with three 1/4 x 1-1/8-inch screws (P/N 103258) and three 1/4-inch lockplates (P/N 36306). Insert the prongs of the lockplates into the lockholes in the adapter. Tighten the screws to 90 to 120 inch/pounds torque (8 to 10 foot/pounds) and bend up one edge of each lockplate to hold the screws. (See Figure 7.)

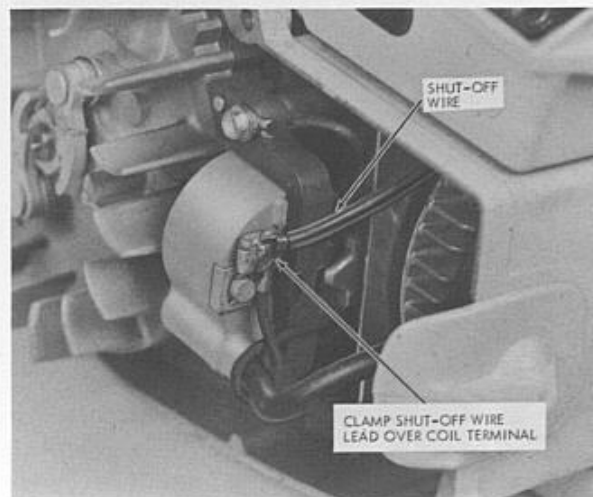


Figure 6. Shut-off Connection



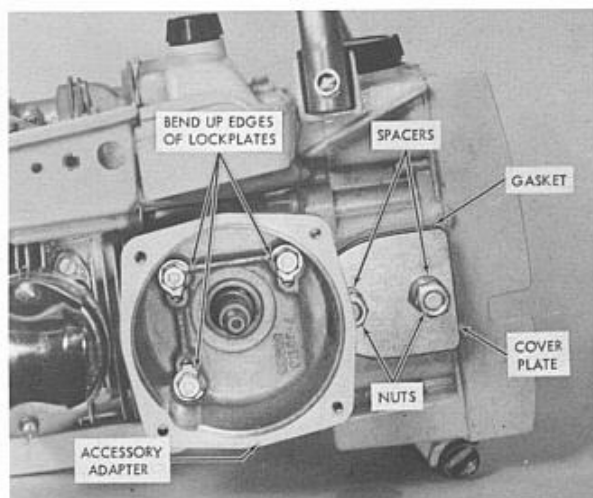


Figure 7. Installation of Adapter

5. Reinstall the clutch assembly (rotor, spring, and shoes) but not the clutch drum. Tighten the rotor to 180 to 240 inch/pounds torque (15 to 20 foot/pounds).

6. Mount the Drive Unit on the Adapter with four 1/4-20 x 1-inch screws (P/N 101982), four lock washers (P/N 100153), and four 1/4-inch plain washers (P/N 100004) as shown in Figure 8. The lockwashers go between the head of the screw and the plain washer.

7. Assemble the handle bar on the drive shaft housing as shown in Figure 9 with four

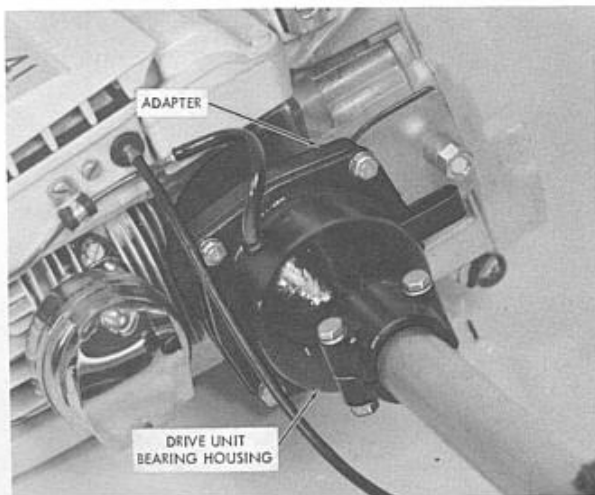


Figure 8. Mounting Drive Unit

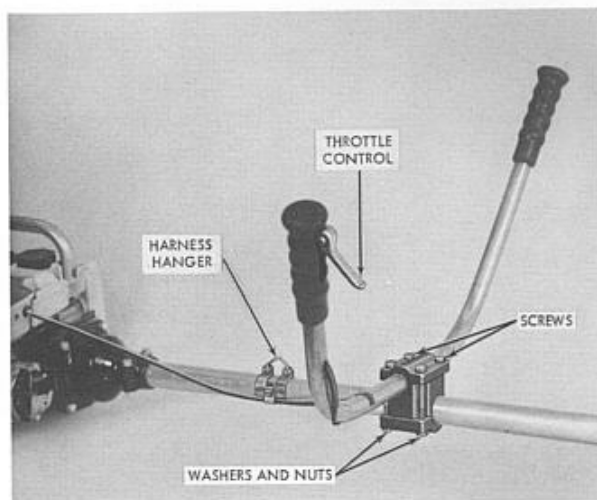


Figure 9. Handle Bar Installation

1/4-20 x 3-1/4-inch screws (P/N 102127), four 1/4-inch plain washers (P/N 100004), four 1/4-inch lockwashers (P/N 100153) and four 1/4-20 inch nuts (P/N 101143). The handle bar must be positioned for the best balance of the Drive Unit. Note that the throttle control is on the right hand upright and that the bar is mounted off-center to the left.

8. Assemble the Bellcrank on the Bellcrank Bracket with the Cotter Pin (see Figure 10). Spread the ends of the Cotter Pin apart to hold the Bellcrank in place on the Bracket.

9. Thread the loose end of the Shut-off Wire through the Governor Wire Clamp as shown in Figure 11. Align the screw holes on the Clamp with the screw hole (small hole on left) drilled in the side of the airbox. Put the Bellcrank Bracket inside the airbox and align its screw holes with the two small airbox screw holes. Secure the Governor Wire Clamp (on outside of airbox) and the Bellcrank Bracket (on inside of airbox) with two 10-24 x 3/8-inch long screws (P/N 100415) and two 10-24 hex nuts (P/N 101191).

10. Insert the loose end of the Governor Wire (leading from the Bearing housing on the drive unit) into the Shut-off Wire connection as shown in Figure 11.

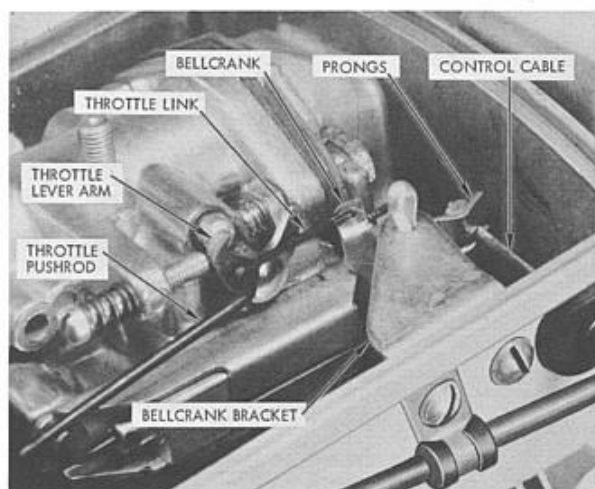


Figure 10. Bellcrank Assembly

11. Feed the end of the control cable through the Special Grommet (P/N 57436). Insert the end of the control cable through the 1/2-inch hole drilled in the airbox and hook the cable between the two prongs on the Bellcrank. Slide the Special Grommet toward the end of the control cable and mount the Grommet on the 1/2-inch hole as shown in Figure 11.

12. Loosen the carburetor mounting screws and lift the carburetor free of the airbox flange. Turn and tilt the carburetor until the throttle pushrod can be detached from the throttle lever arm.

#### NOTE

When making this installation on a Tillotson carburetor, the throttle lever arm may be removed from the throttle shaft. This permits the throttle link to be installed on the throttle pushrod without disturbing the carburetor.

13. Slip the loop end of the throttle link over the end of the pushrod and replace the pushrod in the lever arm. Replace the carburetor on the airbox flange and tighten the mounting screws.

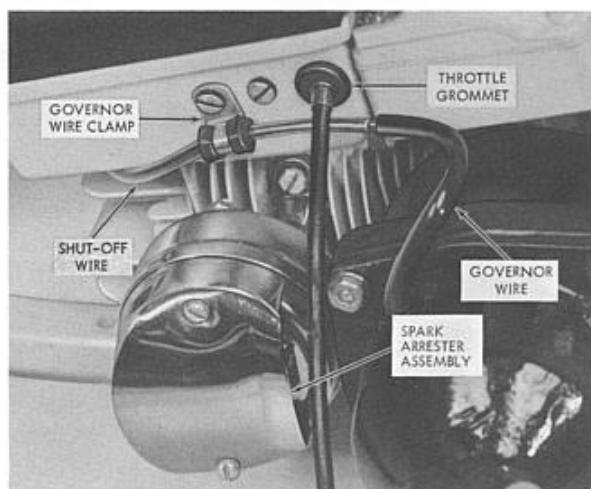


Figure 11. Mounting Special Grommet

14. Rest the free end of the throttle link on the bellcrank and make a mark on the link directly over the hole in the bellcrank. Bend the link down at the point marked, so that the end of the link will drop down through the hole. Make another bend in the link under the bellcrank, to hold the link securely in position. (See Figure 10.)

15. Reinstall the starter assembly (if removed), fan housing, air cleaner screen, and the air cleaner cover.

#### CAUTION

Before reinstalling the fan housing, make sure that no small screws, nuts, or other small metallic objects are clinging to the magnet on the flywheel.

16. Mount the new Spark Arrester Assembly on the engine with two 10-24 x 5/8-inch long screws (P/N 102388). Make sure that the exhaust discharge faces toward the handle brace.

17. Save all the chain saw parts removed from the engine as these parts will be required later for normal chain saw operation.

An Airbox Hole Cover (to cover the three holes drilled in the airbox) is included in the Conversion Kit.

#### INSTALLATION OF BRUSH CUTTER KIT

1. Mount the Blade Guard and the Grass Shield on the gear housing drive shaft with three 10-24 x 5/8-inch long screws (P/N 102388) and three No. 10 lockwashers (P/N 103174). (See Figure 12.)
2. Press the No. 3 Woodruff key (P/N 103882) into the keyway on the drive shaft.
3. Install the Blade Spring, the Blade Hub Assembly, the Brush Cutter Blade (with the teeth facing counter-clockwise), the Blade Clamp Assembly, and the 1/2-20 left-hand thread nut (P/N 104455). Tighten the nut securely and align the drilled hole in the nut with the drilled hole in the drive shaft.

#### NOTE

Do not back off the nut to align the hole in the nut with the drive shaft hole. The blade is friction driven to absorb cutting impacts, and if the nut is not tight, slippage and poor cutting will result.

4. Install the 3/32 x 1-inch cotter pin (P/N 100009) through the aligned holes and spread the ends, forming them around the hex nut.

#### INSTALLATION OF WEED CUTTER KIT

1. Assemble the Shroud Assembly onto the Guard Assembly with the Bracket, three 10-24 x 3/8-inch long screws (P/N 100415), and three 10-24 hex nuts (P/N 101191). (See Figure 13.) Place the assembled parts on the gear housing drive shaft.

2. Install the Grass Shield on the drive shaft and secure the Grass Shield and the Guard Assembly with three 10-24 x 5/8-inch long screws (P/N 102388) and three No. 10 lockwashers (P/N 103174).

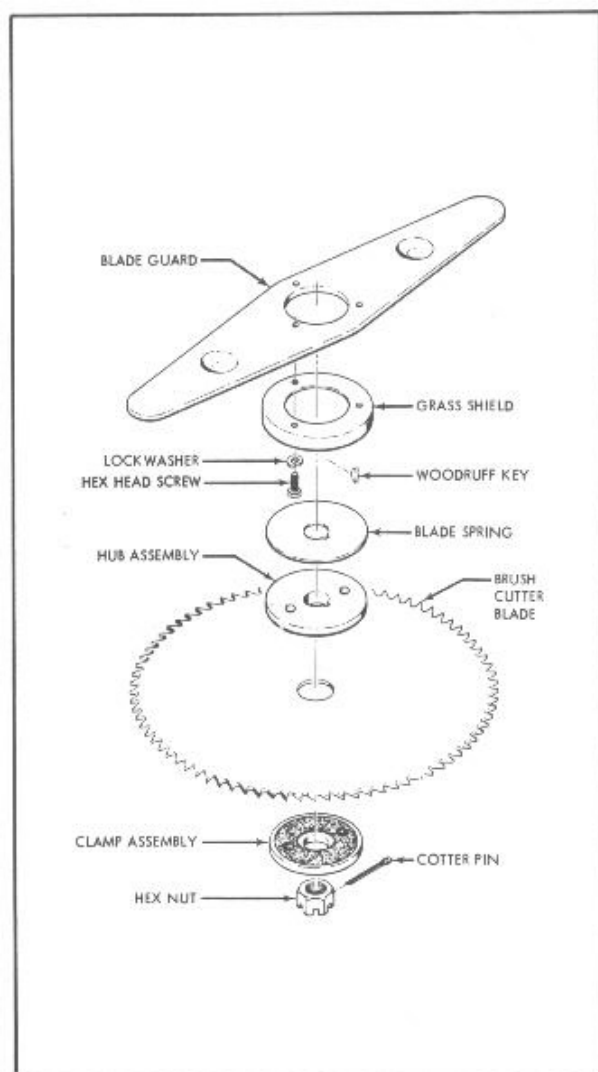


Figure 12. Installation of Brush Cutter Kit 57610

3. Mount the two Shroud Braces on the Shroud Assembly with two 1/4-20 x 1/2-inch long screws (P/N 100474), four plain washers (P/N 100005), and two 1/4-20 hex nuts (P/N 103242). See Figure 13. Attach the Shroud Braces to the flanged clamp on the gear housing by utilizing the screw and nut already on the clamp.

#### CAUTION

Install the screws with the screw threads up to prevent interference with the cutter blade.



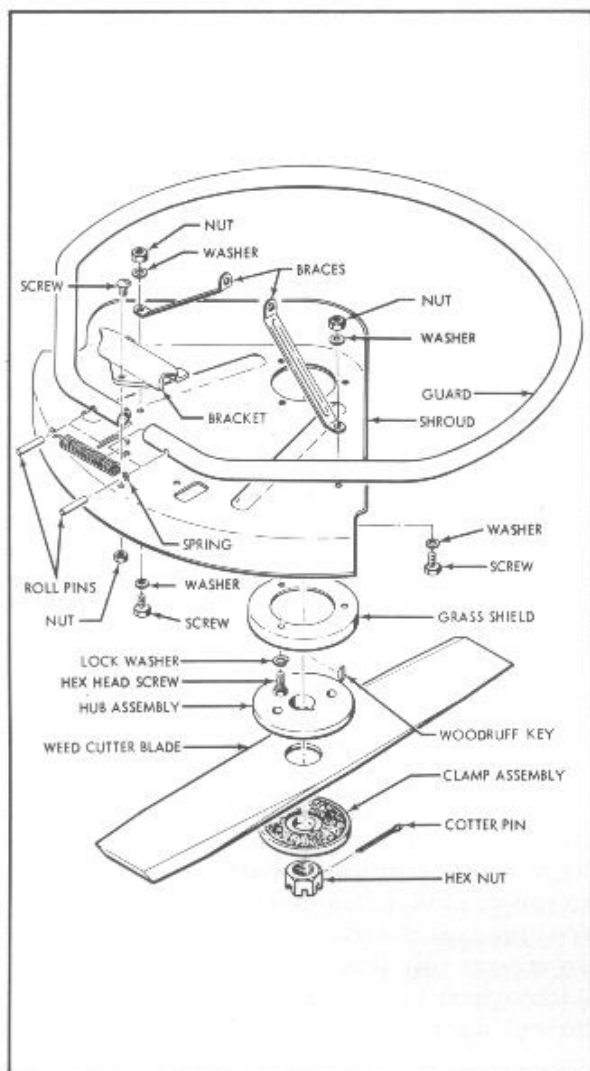


Figure 13. Installation of Weed Cutter Kit 57630

4. Press the No. 3 Woodruff key (P/N 103882) into the keyway on the drive shaft.
5. Install the Blade Hub Assembly, the Weed Cutter Blade, the Blade Clamp Assembly, and the 1/2-20 left-hand thread nut (P/N 104455). Tighten the nut securely and align the drilled hole in the nut with the drilled hole in the drive shaft.

#### NOTE

Do not back off the nut to align the hole with the drive shaft hole. The blade is friction driven to absorb cutting impacts, and if the nut is not tight, slip-page and poor cutting will result.

6. Install the 3/32 x 1-inch cotter pin (P/N 100009) through the aligned holes and spread the ends of the cotter pin, forming them around the hex nut.

## FUEL

When mixing oil and gasoline for your fuel mixture, follow the instructions contained in the Owner's Manual that came with your chain saw. These instructions pertain to the proper proportions of oil and gasoline for the type of oil used as well as safety precautions to be observed.

## LUBRICATION

The Drive Unit is lubricated with #310 Lubriplate when shipped from the factory. After 500 hours of operation, disassemble the gear housing and clean the gears and interior parts of the gear housing. After reassembling the gear housing, put one and one-half ounces of #310 Lubriplate in the gear housing and one and one-half ounces of 140 gear oil into the drive shaft housing. Clean and re-lubricate after each additional 500 hours of operation.

## CARRYING HARNESS

Two types of carrying harness are available for the Cutter Attachments. The 52077 Harness Assembly is included with the Drive Unit as standard equipment. However, if your work demands a stronger, longer-wearing harness, the optional Harness Assembly, P/N 57504, can be obtained from your local McCulloch dealer.

Wear the carrying harness in the same way as shown in Figure 16. The pad goes over the left shoulder; the stabilizing strap passes around the left side from the back and snaps onto the ring in front. The snap clamp with the roller, hooks on the harness hanger on the drive shaft housing (Figure 17).

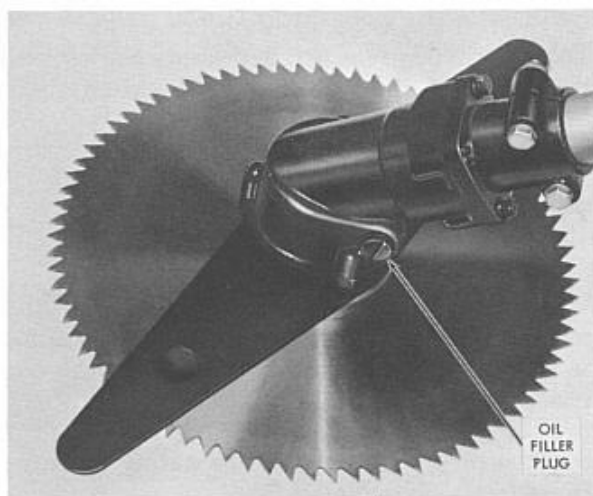


Figure 14. Gear Housing Lubrication

Adjust the harness buckles so that the complete unit feels evenly balanced and comfortable with the blade a few inches above, and parallel to, the ground. This is the natural cutting position.

## OPERATING INSTRUCTIONS

**Starting** - Follow the OPERATING INSTRUCTIONS contained in the Owner's Manual before operating the engine. Disregard all instructions pertaining to the bar and chain.

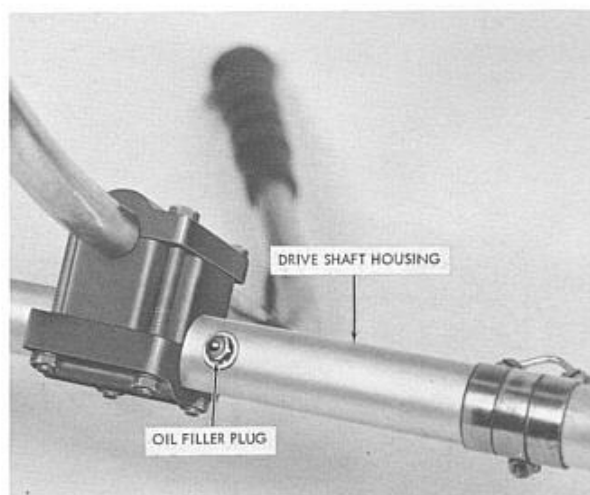


Figure 15. Drive Shaft Housing Lubrication

At engine idle speed, the cutting blade should remain stationary. To start the cutter blade rotating, squeeze the throttle control on the handle bar, opening the throttle. To stop the cutter blade, release the throttle control lever and the engine will return to idle speed.

**Cutting** - Cutting is controlled by moving the drive unit by means of the bow-shaped handle bar. Hold the cutter blade parallel to the ground and squeeze the throttle control lever on the handle bar. When the blade rotates at full cutting speed, begin cutting. Although it is desirable that brush growth be cut as close as possible to the ground,



Figure 16. Manner of Wearing Harness

be careful not to drive the cutting blade into the ground or against rocks or hidden boulders.

If the Brush Cutter is to be used for felling, never cut trees that are more than six inches in diameter.

If the cutting blade slips excessively while cutting, the shaft nut should be tightened and then re-locked, using a new cotter pin.

#### CAUTION

Make sure the cotter pin is in place and in good condition. Due to the nature of use, both the cotter pin and the nut are subject to extreme wear and mechanical abuse which, if not checked, can result in early failure.

#### GENERAL MAINTENANCE

While very little maintenance is required for the unit, a routine inspection should be made at least once each week. Wear will

be greatest at the cutting end of the unit and the following parts should be thoroughly checked during your inspection: the two friction discs, Woodruff key, hex nut, and the cotter pin.

Make sure the two friction discs, one bonded to the blade hub, and the other to the blade clamp (Figures 18 and 19) are not broken or worn. If the keyways on the blade hub or blade clamp are enlarged due to wear, replace them. Replace the Woodruff key if the fit is loose and sloppy.

#### CAUTION

Do not attempt to operate the cutter without a Woodruff key installed in the shaft. If the key is not installed, the gear shaft will not absorb the full force of the blade when it accelerates or decelerates and the end of the gear shaft will twist.

Blade Sharpening - Most McCulloch dealers offer fast and efficient blade sharpening service. If your local McCulloch dealer does not provide this service, he will recommend an expert saw shop in your area.



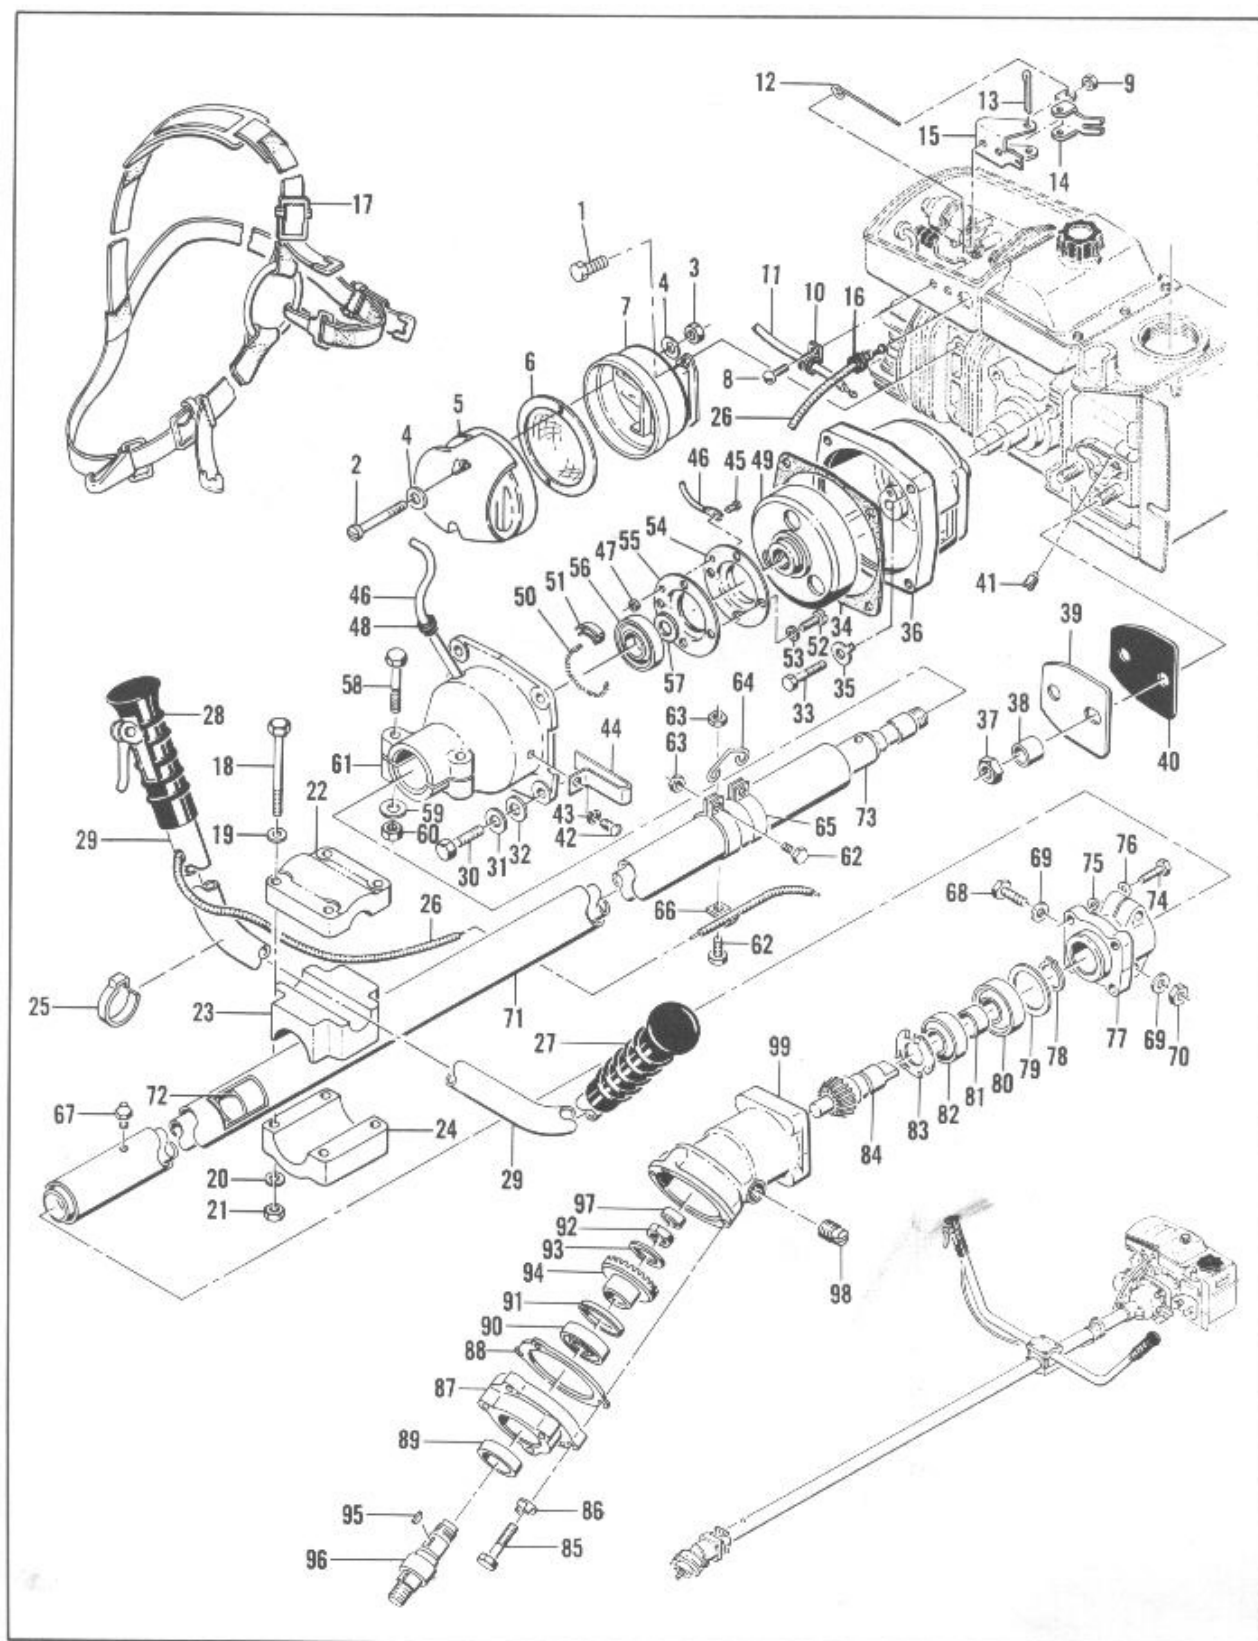


Figure 17. Exploded View 57600A Drive Unit and Accessory Kits

Index No.	Part Number	Nomenclature	Units Per Assy
1	**102388	Screw - Hex hd 10-24 x 5/8 in. lg. ....	2
	**50444C	Spark Arrester Assy. ....	1
2	**102135	. Screw - Fil hd 10-24 x 2 in. lg. ....	2
3	**101191	. Nut - Hex 10-24. ....	2
4	**110264	. Washer - Plain #10 ....	4
5	**50447C	. Top Assy - Spark arrester. ....	1
6	**61545	. Baffle Assy - Spark arrester ....	1
7	**52424	. Bottom Assy - Spark arrester ....	1
8	**100415	Screw - Rd hd 10-24 x 3/8 in. lg ....	2
9	**101191	Nut - Hex 10-24. ....	2
10	**103702	Clamp - Governor wire. ....	1
11	**57466	Wire Assy - Shut off. ....	1
12	**57403A	Link - Throttle ....	1
13	**105573	Pin - Cotter 1/8 x 1-1/4 in. lg ....	1
14	**57404A	Bellcrank - Throttle. ....	1
15	**57405	Bracket - Bellcrank ....	1
16	**57436	Grommet - Special ....	1
17	52077	Harness Assy ....	1
18	*102127	Screw - Hex hd 1/4-20 x 3-1/4 in. lg ....	4
19	*100004	Washer - Plain ....	4
20	*100153	Washer - Lock ....	4
21	*101143	Nut - Hex 1/4-20 ....	4
22	*58383A	Clamp - Handle bar ....	1
23	*57955	Body - Clamp ....	1
24	*57954A	Driveshaft - Clamp ....	1
	50977	Handle and Controls Assy ....	1
25	18909A	. Clip ....	1
26	50980	. Cable Assy ....	1
27	50979	. Grip - Handle ....	1
28	18207A	. Grip - Handle control ....	1
29	50978	. Handle ....	1
30	**101982	Screw - Hex hd 1/4-20 x 1 in. lg ....	4
31	**100153	Washer - Lock ....	4
32	**100004	Washer - Plain ....	4
33	**103258	Screw - Hex hd 1/4-20 x 1-1/8 in. lg ....	3
34	**36623	Spacer - Insulating. ....	1
35	**36306	Plate - Lock ....	3
36	**61478	Adapter - Accessory. ....	1
37	**103729	Nut - Hex 3/8-24 ....	2
38	**50484	Spacer - Plate ....	2
39	**50485	Plate - Cover ....	1
40	**57437	Gasket - Cover plate ....	1
41	**57595	Vent Plug - Fuel tank ....	1
42	102816	Screw - Rd hd 10-24 x 3/8 in. lg ....	1
43	101194	Washer - Lock #10 ....	1
44	50961	Switch - Stop ....	1
45	103934	Screw - Fil hd 6-32 x 1/4 in. lg ....	1
46	50242	Wire Assembly - Governor ....	1
47	100796	Nut - Hex 6-32 ....	1
48	101680	Grommet ....	1
49	61476	Clutch Drum Assembly ....	1
50	50968	Spring - Governor ....	1
51	50967	Shoe - Governor ....	1
52	104324	Screw - Hex hd 8-32 x 1/2 in. lg ....	4
53	104323	Washer - Insulator. ....	4
54	50963	Retainer - Bearing ....	1
55	50962	Insulator - Governor. ....	1
56	101446	Bearing - Ball. ....	1
57	57708	Spacer - Clutch drum ....	1

\*In Loose Parts Kit.

\*\*In Conversion Kit.

Index No.	Part Number	Nomenclature	Units Per Assy
58	102125	Screw - Hex hd 1/4-20 x 1-3/4 in. lg	2
59	100004	Washer - Plain 1/4 in.	4
60	101143	Nut - Hex 1/4-20	2
61	50954	Housing - Bearing	1
62	102762	Screw - Hex hd 10-24 x 1/2 in. lg	3
63	101191	Nut - Hex 10-24	3
64	36877A	Hanger - Strap	1
65	36878	Clamp - Hanger	3
66	36896	Clip - Cable	1
67	103500	Oiler	1
68	102125	Screw - Hex hd 1/4-20 x 1-3/4 in. lg	2
69	100004	Washer - 1/4 plain	4
70	101143	Nut - Hex 1/4-20	2
71	36900A	Housing Assy - Drive shaft	1
72	36899	Bushing	4
73	50240C	Shaft Assy - Drive	1
74	102289	Screw - Hex hd 10-24 x 3/4 in. lg	4
75	100003	Washer - Plain	4
76	103174	Washer - Lock	4
77	57495	Clamp - Flanged	1
78	100849	Ring - Snap	1
79	57496A	Shim - Drive gear 0.004 - 0.006 in. thick	As Reqd
	57497A	Shim - Drive gear 0.009 - 0.011 in. thick	As Reqd
	57498A	Shim - Drive gear 0.018 - 0.022 in. thick	As Reqd
	57612	Shim - Drive gear 0.030 - 0.034	As Reqd
80	104452	Bearing - Ball	1
81	57013	Spacer	1
82	104575	Bearing - Ball	1
83	57382A	Washer - Spring	2
84	§52672	Gear - Bevel	1
85	102289	Screw - Hex hd 10-24 x 3/4 in. lg	3
86	28052	Lockplate	3
87	57356	Cover - Gear housing	1
88	57385A	Shim - Driven gear 0.010 - 0.012	As Reqd
	57383A	Shim - Driven gear 0.004 - 0.006	As Reqd
	57386A	Shim - Driven gear 0.018 - 0.022	As Reqd
	57613	Shim - Driven gear 0.015 - 0.025	As Reqd
	57611	Shim - Driven gear 0.030 - 0.034	As Reqd
89	102979	Seal - Oil	1
90	104739	Bearing - Ball	1
91	100342	Ring - Snap	1
92	57357	Nut - Special	1
93	57358	Washer - Lock	1
94	§52672	Gear - Pinion	1
95	103882	Key - Woodruff #3	1
96	57346	Shaft - Gear	1
97	103512	Bearing - Needle	1
98	100432	Plug	1
99	57003	Housing - Gear	1
	*57060	Wrench	1
	**50448B	Template - Airbox	1
	**50263A	Cover - Airbox hole	1

\*In Loose Parts Kit.

\*\*In Conversion Kit.

§ Sold only in matched sets - order P/N 52672.



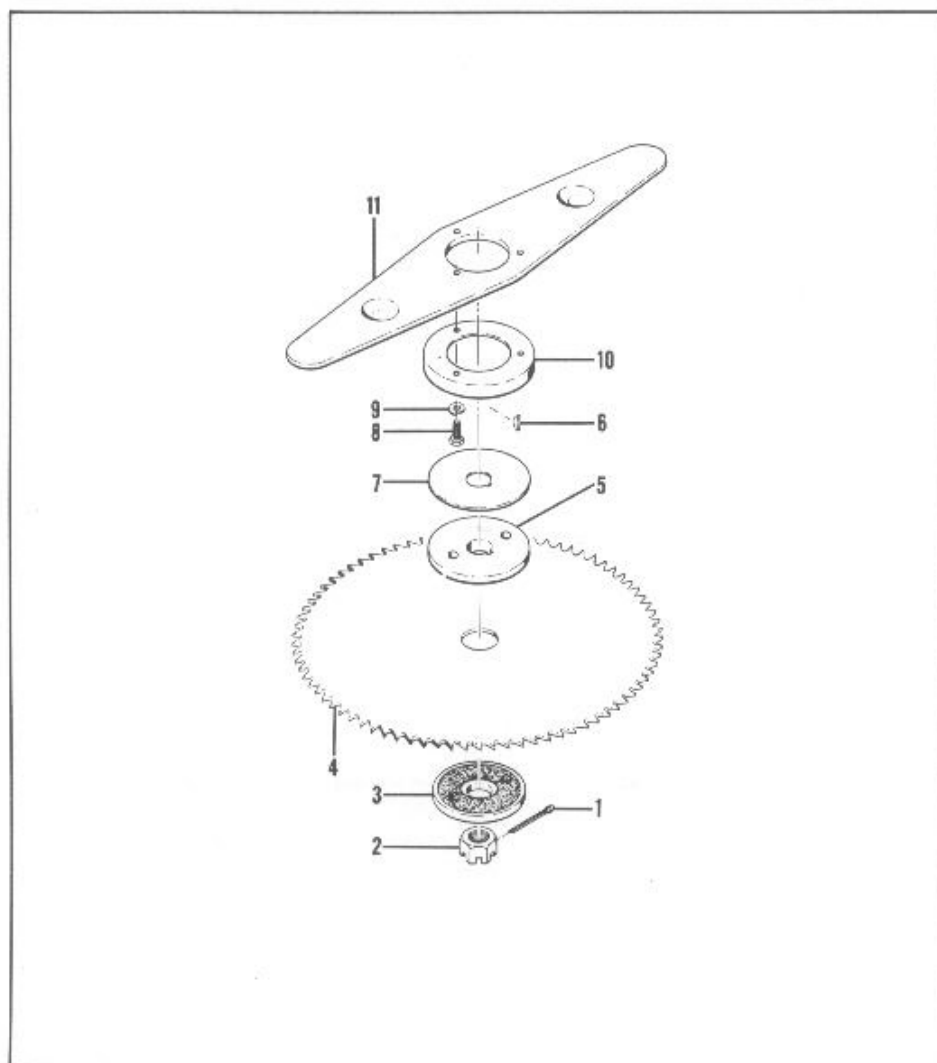


Figure 18. Brush Cutter Attachment

Index No.	Part Number	Nomenclature	Units Per Assy
	57610	Brush Cutter Attachment . . . . .	1
1	100009	. Pin - Cotter 3/32 x 1 in. lg . . . . .	1
2	104455	. Nut - Hex 1/2-20 (LH thread) . . . . .	1
3	57380	. Clamp Assy - Blade . . . . .	1
4	104151	. Blade - Brush cutter (80 tooth) . . . . .	1
	104152	. Blade - Brush cutter (40 tooth) optional . . . . .	1
5	57381	. Hub Assy - Blade . . . . .	1
6	103882	. Key - Woodruff #3 . . . . .	1
7	52643	. Spring - Blade . . . . .	1
8	102388	. Screw - Hex hd 10-24 x 5/8 in. lg . . . . .	3
9	103174	. Washer - Lock #10 . . . . .	3
10	57387	. Shield - Grass . . . . .	1
11	57373	. Guard - Blade . . . . .	1

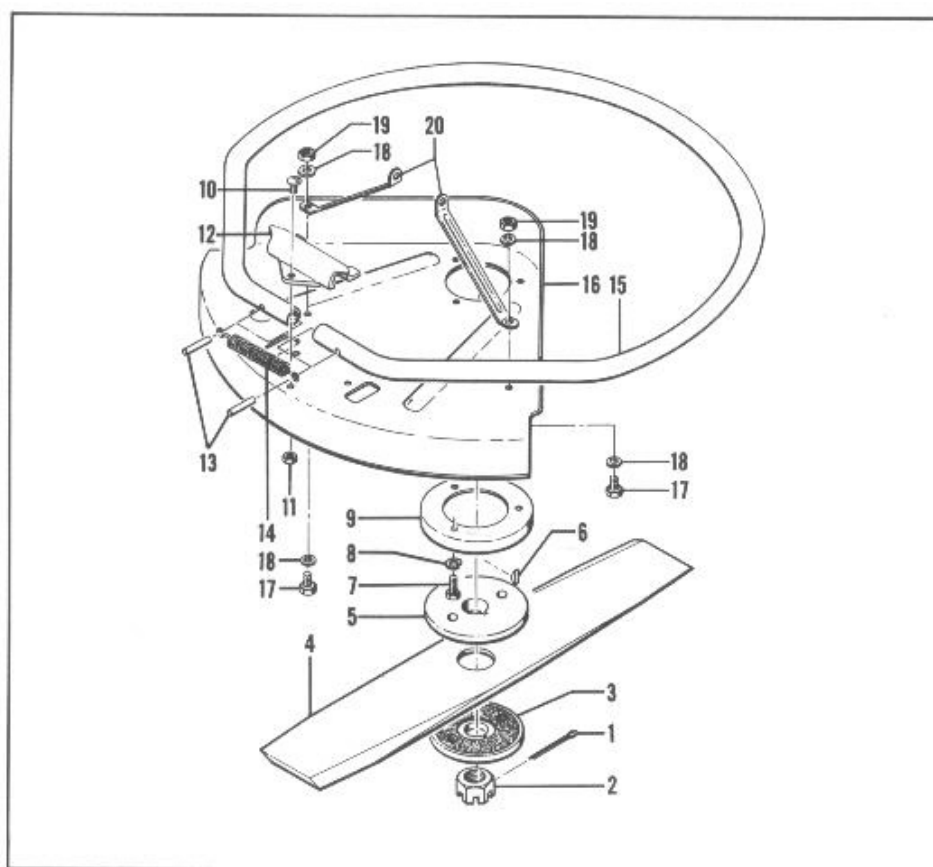


Figure 19. Weed Cutter Attachment

Index No.	Part Number	Nomenclature	Units Per Assy
	57630	Weed Cutter Attachment . . . . .	1
1	100009	. Pin - Cotter 3/32 x 1 in. lg . . . . .	1
2	104455	. Nut - Hex 1/2-20 (LH thread) . . . . .	1
3	57380	. Clamp Assy - Blade . . . . .	1
4	50544	. Blade - Weed cutter . . . . .	1
5	57381	. Hub Assy - Blade . . . . .	1
6	103882	. Key - Woodruff #3 . . . . .	1
7	102388	. Screw - Hex hd 10-24 x 5/8 in. lg . . . . .	3
8	103174	. Washer - Lock . . . . .	3
9	57387	. Shield - Grass . . . . .	1
10	100415	. Screw - Rd hd 10-24 x 3/8 in. lg . . . . .	3
11	101191	. Nut - Hex 10-24 . . . . .	3
12	50538	. Bracket - Weed cutter . . . . .	1
	50535	. Guard Assy - Weed cutter . . . . .	1
13	103818	. Pin - Roll . . . . .	2
14	50537	. Spring . . . . .	1
15		. Guard - Weed cutter . . . . . (Order Guard Assy #50535)	1
16	50531	. Shroud Assy - Weed cutter . . . . .	1
17	100474	. Screw - Hex hd 1/4-20 x 1/2 in. lg . . . . .	2
18	100005	. Washer - Plain . . . . .	4
19	103242	. Nut - Hex 1/4-20 . . . . .	2
20	57617	. Brace - Top shroud . . . . .	1