


McCulloch Mac 10-10 Automatic

**Our best saws for farm,
forest and home.**

**Our lowest prices ever
From \$159.95.***

The Mac 10-10 Automatic is the saw that will work harder than you do. Its rugged 55cc (3.3 cu. in.) engine has the power to handle the toughest jobs. Yet it's a true lightweight, 11¾ lbs.* We've sold over ¾ million of the Mac 10 series saws so you know they've proven their dependability. Balanced lightweight design and all-position carburetor make it easy to prune overhead or cut at any angle. Choke-type carburetor for fast starts. Mac 10-10 Automatic oils its own bar and chain as it cuts for extra ease and extended bar and chain life. It comes equipped with factory installed 16" bar and fast-cutting McCulloch chain.


Mac 10-10 Automatic, new low price; \$174.95*

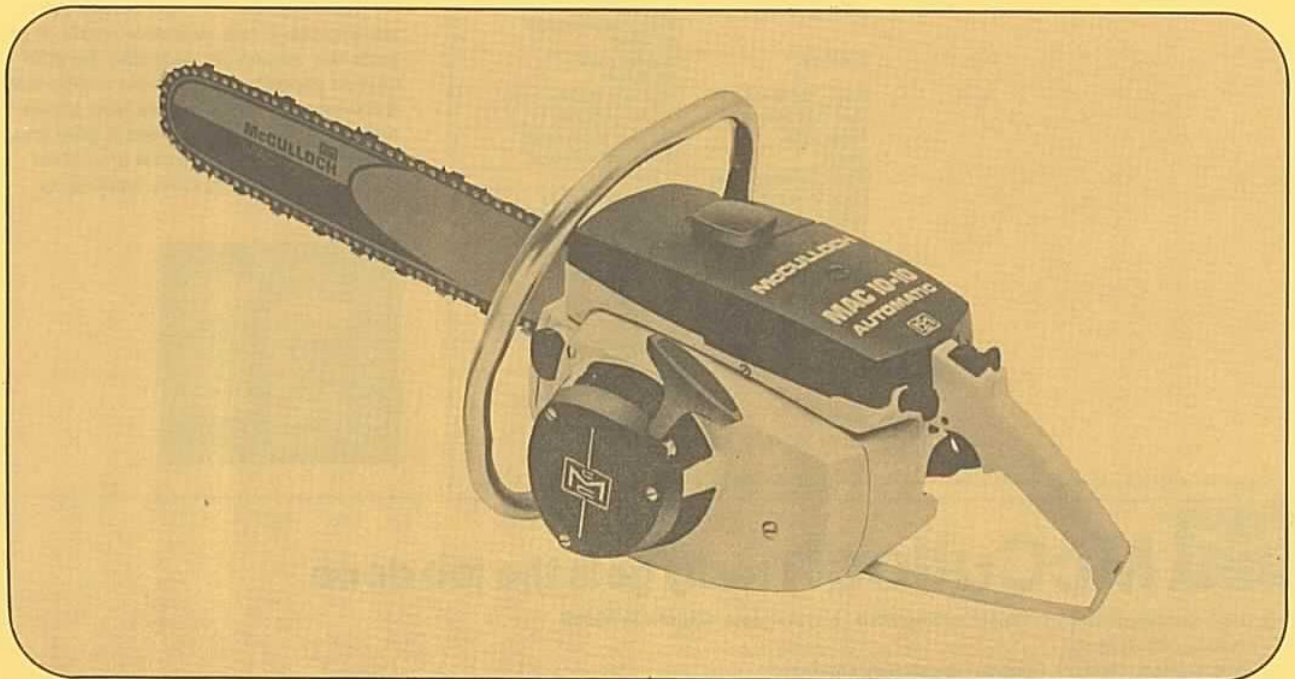

*Manufacturer's suggested list price
†Less cutting attachments

© McCulloch 1972

McCulloch Bars & Chain

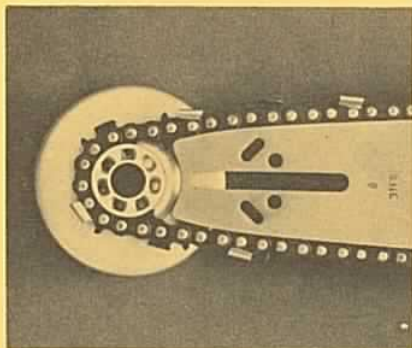

Unlike other brands, McCulloch bars and chains are designed for just one purpose: to give you the best cutting performance from your McCulloch engine. McCulloch guide bars are specially contoured to fit precisely, hardened to resist wear, and machined from strong metals. Their narrow design reduces pinching and binding in the cut, reduces weight too.

McCulloch low-profile chain has full chip clearance so it cuts faster and smoother in all woods. Top plates on cutter teeth are designed to eliminate chip jams. Side links are extra strong. Large bearing surfaces insure longer chain life because they resist wear, take more punishment.

When you team a McCulloch bar and chain with a McCulloch sprocket you've done all you need to do — the engine does the rest!

McCulloch Sprockets

Just as a racing car needs a special transmission to handle all the power the engine develops, it takes a precision sprocket to transmit full power from McCulloch's engine to the chain. Only McCulloch designs sprocket, bar and chain as an integrated unit then precision matches these important components to the engine. To meet the demands of these high-compression engines, McCulloch rim sprockets ride on caged needle bearings to reduce friction and eliminate chain "creep" at idle speeds. Special "slots" in the rim sprocket guide center-link drive-tangs for a smooth, belt-drive action while the rim supports side links to reduce chain wobble, jump, sag and chatter.

McCulloch Chain Saw Features and Specifications

McCulloch Convenience Features		MAC 10-10
Weight†		11½ lbs (5.21 kg)
Guide Bar		16" factory installed (40.5 mm)
Overall Dimensions (outside frame)		8½" H x 15" L x 10" W (216 x 371 x 254 mm)
Muffler		Louvered Spark Arrester ("Sound Silencer" optional at extra cost)
Easy Starting		Automatic Rewind with Nylon rope
Bar/Chain Oiling		Manual
Handle Frame		Flush Cut design and rubber insert in pistol grip
Engine Specifications		
Power Unit		Single cylinder, two-cycle, high-performance air-cooled, loop scavenged engine
Displacement		3.3 (55cc)
Bore & Stroke		1.75" x 1.375" (41.5 x 35 mm)
Bearings		Heavy duty ball Con Rod: needle roller
Piston Rings		2 cast iron compression rings
Carburetor		Diaphragm type with choke. Fully enclosed, external in filtered air
Filtering System		Fuel felt filter. Rubber edged flocked air filter
Fuel Type		Regular grade automotive
Fuel — Oil Mixture		40:1 with McCulloch oil
Fuel Tank Capacity		1.1 US pints (.52 L)
Intake Valve		3rd port, piston timed
Clutch		Automatic centrifugal
Clutch Engaging Speed		3,000 RPM
Chain Oiler Capacity		.6 US pints (.28 L)
Ignition		McCulloch waterproof high tension magneto
Breaker Point Gap		.019"-.020" (.5 mm)
Coil Location		Outside flywheel. Fan cooled
Timing		26° BTC
Spark Plug		AC-CS 45T (miniaturized) or Champion DJ9 Gap .025" (.6 mm)
Chain		McCulloch SM-57, .058" (1.47 mm) gauge
Sprocket		7 tooth, 354" (.9 mm) pitch, rim type

† Stated saw weights are for power unit only and do not include cutting attachments.

New McCulloch Chain, Bar & Sprocket Oil

This special anti-wear formula can actually double chain life by providing lubrication during critical first seconds of cutting when ordinary oil has not yet reached bar and chain. A special MOLY additive clings to the chain at all times, even during high-speed cutting for better lubrication, less waste. A new anti-pitch additive keeps chain moving smoothly through green and sappy woods. Available in 1-quart graduated plastic bottles.

McCulloch 40:1 Oil

Only McCulloch recommends a 40:1 gas/oil mix throughout their product line. Because McCulloch engines are built to precise engine tolerances. Many manufacturers specify a thick 16:1 gas/oil ratio for their engines. Our 40:1 oil has many advantages. It can reduce oil costs. It protects the engine by reducing harmful carbon deposits which cause engine wear. It increases power, creates less smoke and adds many hours of spark plug and engine life. Available in new graduated plastic quart bottles, cans, 6-packs, or case lots.



McCulloch really gets the job done

McCulloch Corporation, 6101 West Century Blvd., Los Angeles, California 90045
Lake Havasu City, Arizona

AFFILIATES: Malton, Ontario, Canada • Mechelen, Belgium

Singapore • Seven Hills, N.S.W., Australia •

Buenos Aires, Argentina