

# McCulloch

## Super Pro 125C






# Super Pro 125C THE "CUSHIONED POWER" SAW FOR BIG TIMBER

- Powerful 7.5 cu.in. engine delivers super power for felling, ideal chain speed for bucking and limbing.
- Patented "Cushioned Power System" reduces 90% of fatigue causing vibration\* lets you cut more scale with less effort.
- Lightweight design and maneuverability. Power unit weighs only 22.5 lbs.
- Product design and precision engineering make this the most reliable, dependable and durable big timber saw you've ever used.

The Super Pro 125C has every feature loggers have asked for. Rugged 7.5 cu.in. engine (122.9cc) tackles the biggest timber with extra power to take the longest bars, torque to drive chain through the toughest wood. It's been thoroughly tested and proven in the lab, in the test camps, and in the forests of the world. The reports are in. This one is a Super Pro!

### How Cushioned Power works.

Two rubber shock absorbers isolate the fuel tank from the top of the engine. A third isolates the pistolgrip from the bottom of the engine. They soak up engine vibration *before* it can reach your hands; also keep fuel tank, carburetor and handgrips cool and comfortable.

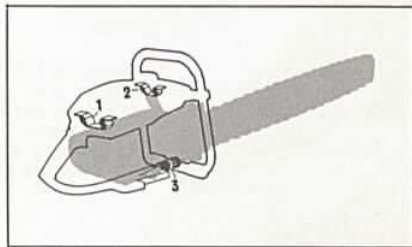

### McCulloch "Smooth Water" Test.

Test shows how "Cushioned Power" reduces vibration 90%.\* Water jumps in the glass attached to engine housing. But water stays calm in glass attached to handgrip! If water can't pick up vibrations along handgrip, neither can your hands!




\*Compared to similar sized saws not equipped with cushioned power vibration isolation system.

# McCULLOCH CHAIN, BARS & SPROCKETS


McCulloch chains come in every popular type pitch, gauge and configuration a pro could ask for. And they're the finest quality chain available. Super Pro full chisel is the chain most pros prefer for big timber cutting. McCulloch Super Pro is available in both round and square filed cutters.

Speed Mac, semi chisel cutter is rapidly gaining world-wide popularity because it has the cutting attributes of chisel chain, smooth, extended stay-sharp characteristics, combined with easy maintenance.

Pro Mac, the finest round chain on the market is the best chain for all-round use.

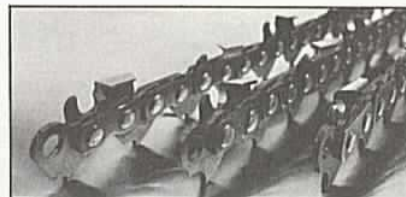

McCulloch guide bars are specially contoured to fit precisely, hardened to resist wear, and machined from strong metals. Our Speed Mac - Sprocket Nose Bar - ranks highest in cutting performance because reduced friction delivers more power to the cutter teeth. Our Super Pro - Roller Nose Bar - ranks next highest in cutting performance with all of the long life/performance benefits. Our Mac, Pro Mac, Mac 10 and Mac 6 - Hardface Nose Bars - feature nose rails hardened with space age steel alloy to make the bar last longer.

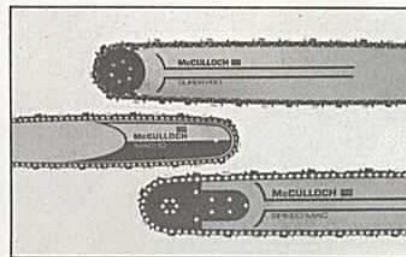

We also have a complete line of sprockets, drums and rims for every cutting need. Our new Super Pro Sprocket is a self-aligning rim sprocket with a "floating" rim which is interchangeable without having to replace the drum. We also have "Fixed Rim," Clover Leaf Spur Type with Drum and Spur Type Sprockets - all precision made for long life.



# FEATURES AND SPECIFICATIONS:

	Super Pro 125C Direct Drive
Weight*	22.5 lbs (10.2 kg)
Guide Bar	McCulloch Sprocket Nose, Round Nose, or Hard Faced bars to 42" (107cm)
Overall Dimensions (outside frame)	13" H x 18 1/2" L x 11 1/4" W (330 x 470 x 302 mm)
Muffler	Heavy duty Spark Arrester
Easy Starting	Easy Pull DSP, Automatic rewind with nylon rope
Bar/Chain Oiling	Automatic plus manual
Handle Frame	Full wrap-around handlebar, "Cushioned Power" isolates operator from engine and cutting vibrations
Displacement	7.5 cu in (122.9cc)
Bearings	Main: Heavy duty ball Con Rod: Needle roller
Carburetor	Diaphragm type with choke, Fully enclosed in filtered air
Filter Systems	Felt fuel filter. Rubber edged felt air filter
Fuel-Oil Mixture	40:1 with McCulloch Custom Lubricant
Fuel Tank Capacity	3.2 US pints (1.51 L)
Clutch Engaging Speed	2,800 RPM
Chain Oiler Capacity	.9 US pints (0.426 L)
Ignition	McCulloch waterproof high tension magneto
Coil Location	Outside flywheel, fan cooled
Chain	McCulloch .404" pitch (10.26mm) .058" gauge (1.47mm)
Sprocket	8 tooth, .404" pitch (10.26mm) "Floating rim" type

\* Power Unit Only less cutting attachments

# ACCESSORIES:

Pre-heater kit, Part No. 85463  
Spark Arrester baffle screen, Part No. 84688  
Adjustable muffler deflector Part No. 85929

# McCULLOCH

## The All American Chain Saw

McCulloch Corporation, 6101 West Century Blvd., Los Angeles, California 90045  
Lake Havasu City, Arizona • Malton, Ontario, Canada • Mechelen, Belgium  
Singapore • Seven Hills, N.S.W., Australia • São Paulo, Brazil

ADV 190170 Printed in U.S.A. Features, specifications and prices subject to change without notice or obligation.

