


McCULLOCH 1964-65 PRICE LIST*

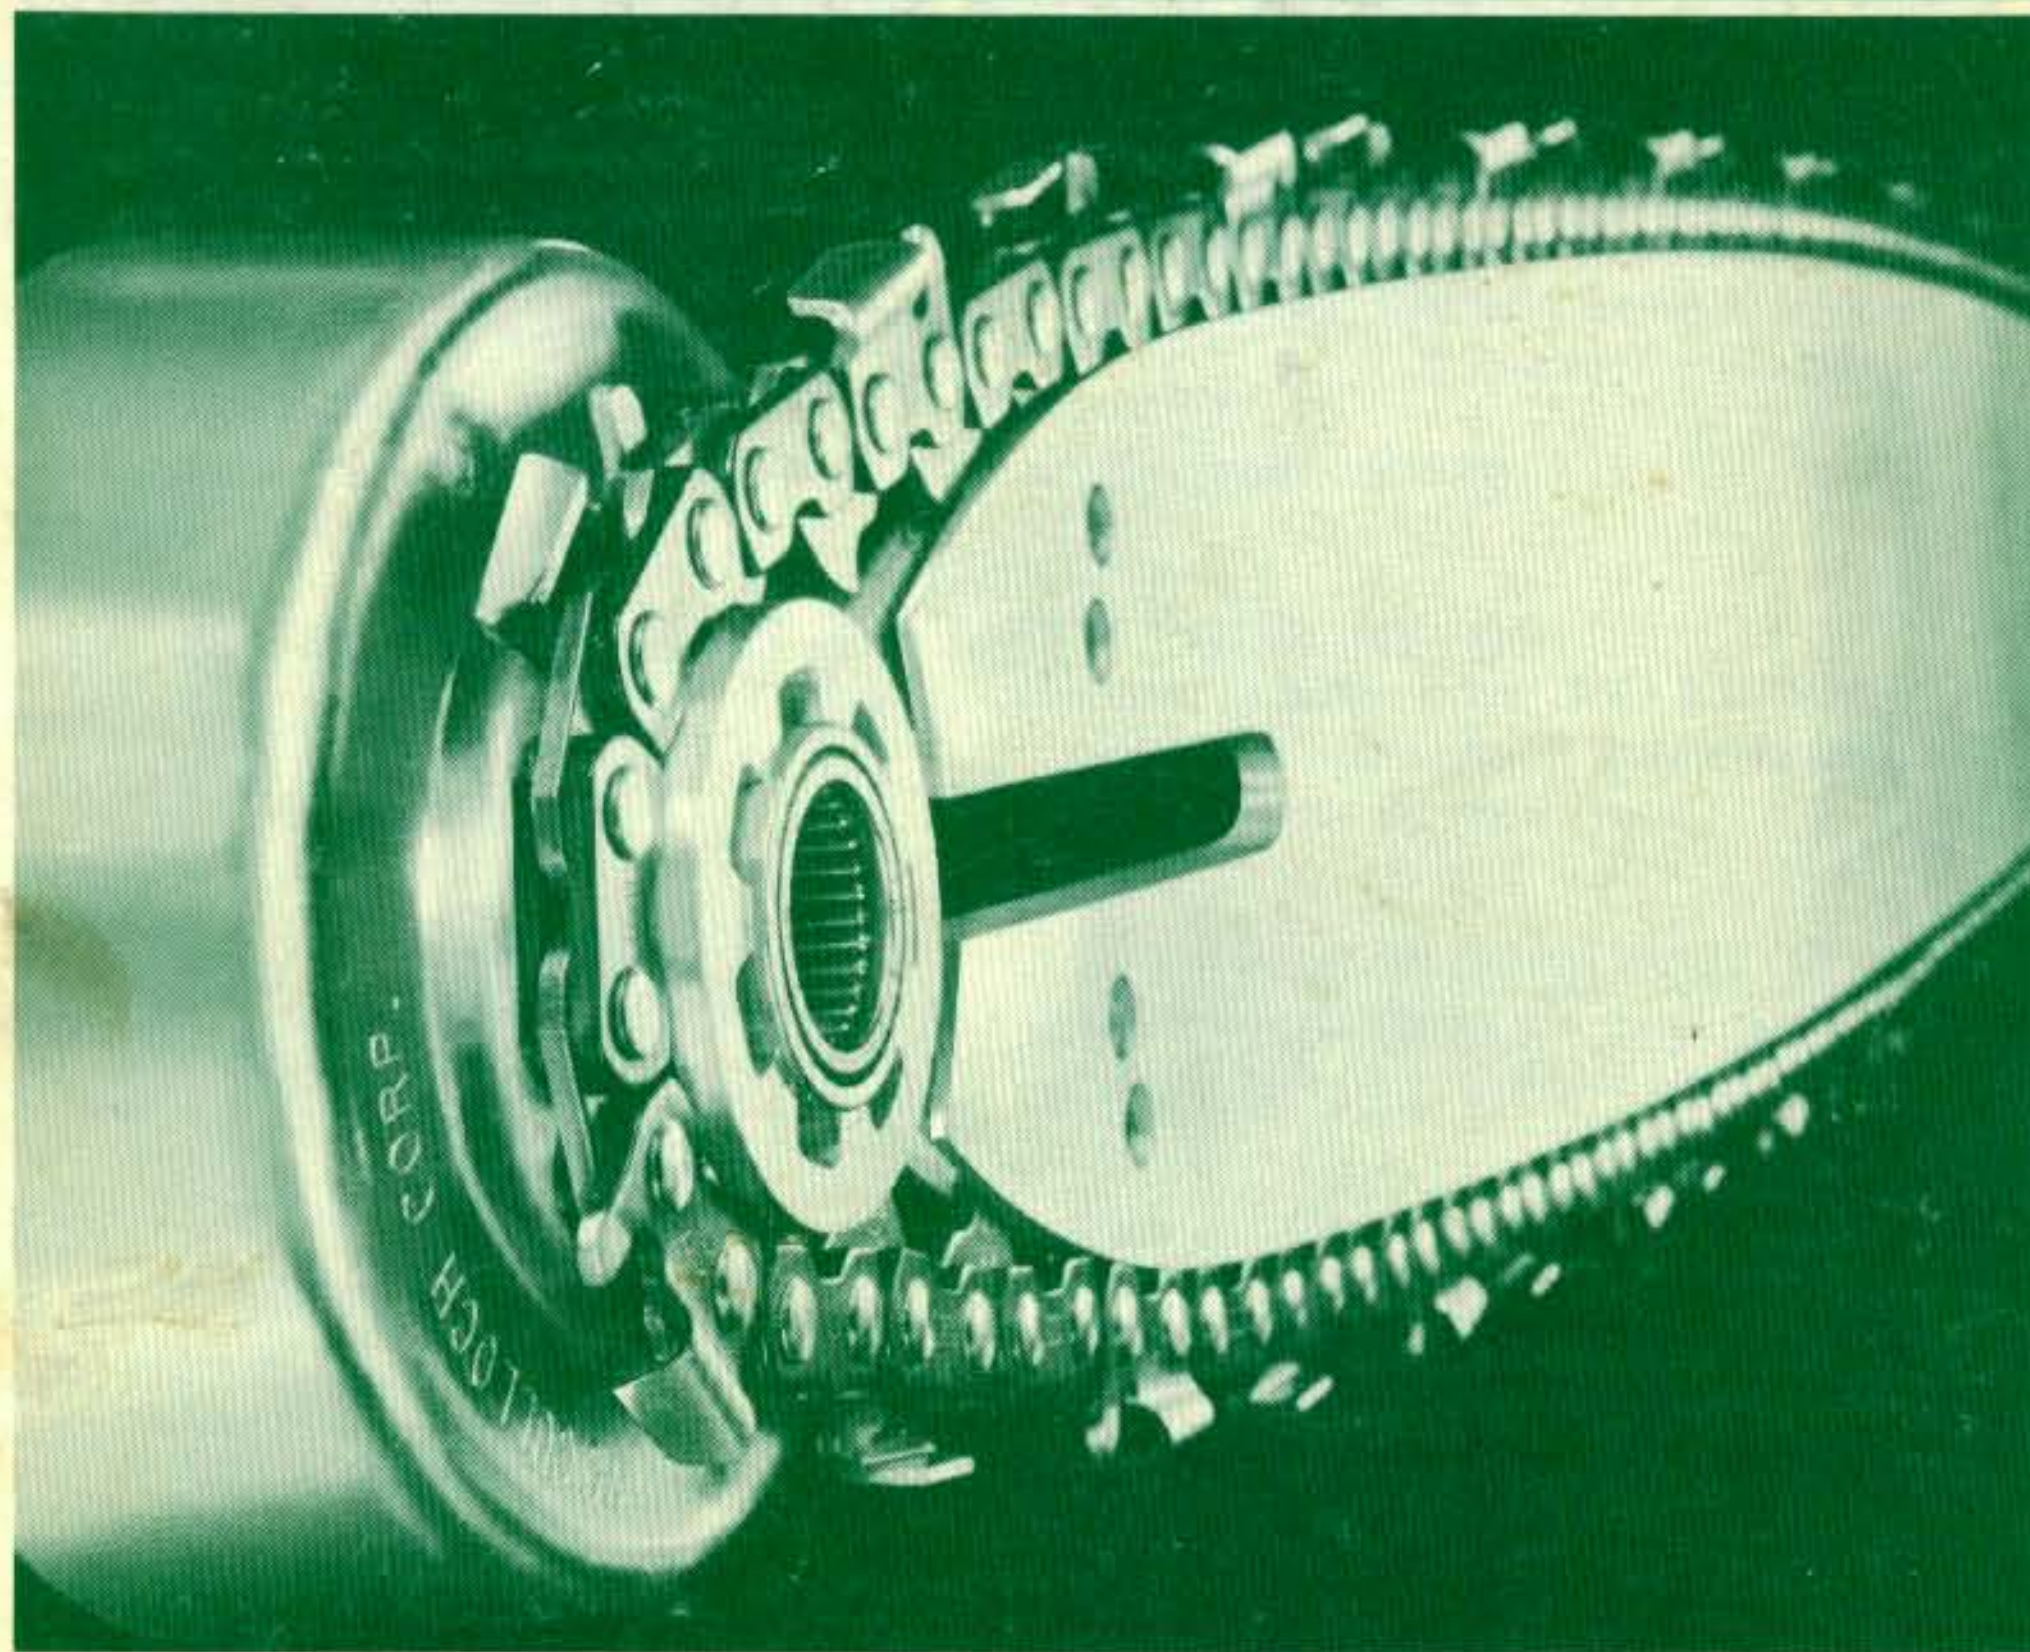

- CHAIN
- BARS
- SPROCKETS
- ACCESSORIES

McCULLOCH SUPER-MAC CHAIN AND SPROCKETS

McCULLOCH AUTO-MAC CHAIN, BARS AND SPROCKETS

McCULLOCH BARS, CHAIN (for speed tip bar, roller-mac bar and paddle bow) AND SPROCKET BUSHING/BEARINGS

McCULLOCH SUPER-MAC CHAIN REPAIR PARTS

McCULLOCH SUPER-MAC CHAIN REELS

McCULLOCH CHAIN TOOLS AND ACCESSORIES

CUT LENGTH PRICES

McCULLOCH OIL, PAINT AND SAFETY HATS

NEW SUPER-MAC CHAIN

designed for today's high-speed, high powered chain saws

Don't ever underestimate the stress and strain a chain saw puts on a chain. Up to 70,000 shock impacts hit the chain every minute, over 4 million in an hour, more than 16 million in an average day's cutting. Shock forces attack the chain from the speeding sprocket, from impact against guide bar and timber. New Super-Mac Chain is designed to withstand these forces, to meet the speed and power developed by today's modern chain saw engines. Super Mac Chain is super strong because it is manufactured from costly high-carbon steel. Each part is specially heat-treated to make it super tough. Then the surface of the metal is specially treated to make it fight off fatigue. New processing methods mean that Super-Mac will take repeated impacts without failing. Super-Mac will stretch less, last longer, and cut smoother.



LONGER LIFE, extra metal in wear areas means longer chain life



PRECISION MADE; the holes in the center links are precision made to very close tolerances so that rivets will fit exactly



LIGHTER WEIGHT, trim, streamlined configuration insures smooth tracking from sprocket to guide bar



EXTRA STRONG; each rivet is so strong it will withstand forces up to 2½ million times its own weight



STAYS SHARP; cutter teeth designed for easy maintenance, made to hold an edge and keep on holding it



SMOOTH CUTTING; the fit of the chain to the sprocket assures smooth delivery of engine power to the cutting chain

It is always advisable to soak your chain in oil prior to break in. But, to help insure lubrication until the oil reaches the rivet area, **all SUPER-MAC chains are pre-lubed before you buy them!** This pre-lubing is important because . . .

PRE-LUBING
GUARANTEES
SUPER-MAC
PROPER BREAK-IN
AND LONGER LIFE



IT ASSURES PROPER LUBRICATION DURING THE CRITICAL BREAK-IN PERIOD.



IT AVOIDS THE DANGER OF METAL TO METAL CONTACT BETWEEN LINKS AND RIVETS THAT CAN DAMAGE THE CHAIN AND SHORTEN ITS LIFE.

ANOTHER IMPORTANT EXTRA FROM McCULLOCH!

CHAIN MAINTENANCE

Selling maintenance when selling chain is good business. The reason is obvious, for a properly maintained chain lasts much longer. The longer it lasts the happier your customer will be. If he's happy, it's quite likely he'll tell other people how good you and the chain are. This all adds up to more profits for you.

Here are some important points to remember when selling a customer a new chain:

1. Make certain his bar and sprocket are in good condition.
2. Make certain his chain is installed correctly.
3. Make certain his chain is "broken-in" correctly.
4. Make certain he knows how to maintain his chain correctly.

7 NEW SUPER-MAC CHAINS TO MEET YOUR NEEDS

SM-65: .404" pitch - direct drive, for all wood types.

SM-8: 1/2" pitch - gear drive saws, for all wood types.

SL-65: .404" pitch - direct drive, for hard or frozen wood, and lower powered saws.

SL-8: 1/2" pitch - gear drive saws, for hard or frozen wood.

SM-7: 7/16" pitch - direct drive or low power saws. All wood types.


SM-9: 9/16" pitch - high powered gear saws, all wood types.

SL-7: 7/16" pitch - direct drive or low power saws. Hard or frozen wood.


McCulloch also offers "F" and "J" chains for heavy-duty two-man chain saws.

PITCH AND GAUGE MEASUREMENT

To find the pitch of a chain measure the distance (D) between three rivets and divide by 2.

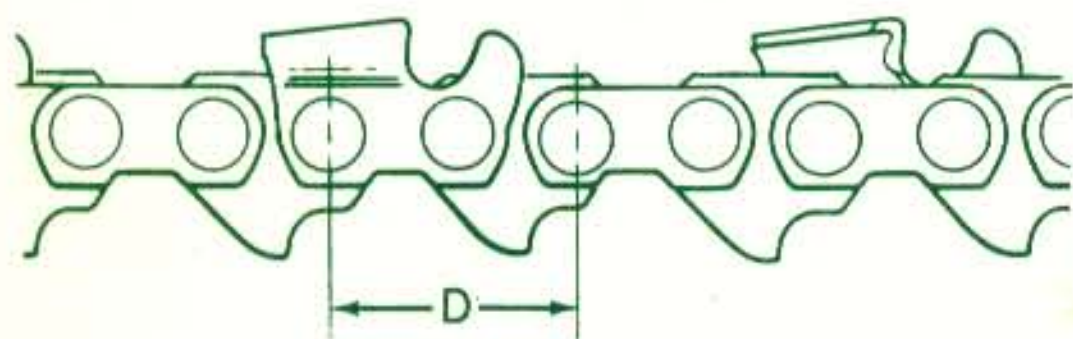

To find the gauge of a chain measure the thickness of a center link at the tang.

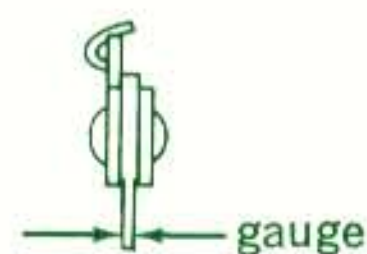

NOTE: MAKE SURE YOU ASK YOUR DISTRIBUTOR FOR INFORMATION ON McCULLOCH'S NEW **CHAIN-O-RAMA** PROGRAM. IT WILL HELP YOU SELL MORE CHAIN . . . AND IT'S FREE!

McCULLOCH SUPER-MAC CHAIN AND SPROCKETS

McCULLOCH AUTO-MAC CHAIN, BARS AND SPROCKETS

McCULLOCH BARS, CHAIN (for speed tip bar, roller-mac bar and paddle bow) AND SPROCKET BUSHING/BEARINGS

McCULLOCH SUPER-MAC CHAIN REPAIR PARTS

McCULLOCH SUPER-MAC CHAIN REELS

McCULLOCH CHAIN TOOLS AND ACCESSORIES

CUT LENGTH PRICES

McCULLOCH OIL, PAINT AND SAFETY HATS

SM SERIES, McCULLOCH SUPER-MAC CHAIN PRICE LIST *

| CHAIN SAW MODEL | BAR | | SM-65 .404" PITCH .058 GAUGE | | | SM-7 7/16" PITCH .058 GAUGE | | | SM-8 1/2" PITCH .058 GAUGE | | | Price* | |
|---|------------------|-------------|------------------------------|--------------|----------|-----------------------------|--------------|----------|----------------------------|--------------|----------|---------|------|
| | Cutting Capacity | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | | |
| (DIRECT DRIVE) 790 ONE/70 740 SERIES 450 440 SUPER 44A 380 SUPER 44 D-44 | 14" | 55204 | 44" | 54 | 60659 | 44" | 50 | 60838 | 44 1/2" | 44 | 60554 | \$18.90 | |
| | 17"(L) | 56506A | 49" | 60 | 60661 | 49" | 56 | 60840 | 49 1/2" | 49 | 60560 | 19.50 | |
| | 19" | 51405A | 53" | 65 | 60663 | 52 1/2" | 60 | 60842 | 52 1/2" | 53 | 60564 | 22.75 | |
| | 19"(L) | 50346 | 53" | 65 | 60663 | 52 1/2" | 60 | 60842 | 52 1/2" | 53 | 60564 | 22.75 | |
| | 24" | 51407A | 62 1/2" | 77 | 60665 | 63" | 72 | 60844 | 63 1/2" | 63 | 60566 | 26.85 | |
| | 24"(L) | 50348 | 62 1/2" | 77 | 60665 | 63" | 72 | 60844 | 63 1/2" | 63 | 60566 | 26.85 | |
| | 31" | 51409A | 76 1/2" | 94 | 60669 | 76" | 87 | 60848 | 77" | 76 | 60576 | 32.85 | |
| | 36" | 51821A | 88" | 108 | 61006 | — | — | — | 88" | 87 | 60578 | 37.75 | |
| | 42" | 51823A | 100" | 123 | 61008 | — | — | — | 100" | 99 | 60580 | 43.15 | |
| | SPROCKETS | SPUR TYPE → | | 7 Tooth(S) | | 51774B | 7 Tooth | | 51178C | 6 Tooth | | 51793B | 4.95 |
| MAC → | | 7 Tooth | | 60916 | — | | — | — | | — | 6.50 | | |
| SUPER MAC → | | — | | 60917 | — | | — | 6 Tooth | | 61185 | 9.95 | | |
| " " → | | — | | — | — | | — | 7 Tooth | | 61190 | 9.95 | | |
| (DIRECT DRIVE) MAC-15 300 ONE/40 250 SERIES 200 D-30 ONE/50 D-36 SERIES | 14" | 55204 | 44" | 54 | 60659 | 44" | 50 | 60838 | | | | \$18.90 | |
| | 17"(L) | 56506A | 49" | 60 | 60661 | 49" | 56 | 60840 | | | | 19.50 | |
| | 19" | 51405A | 53" | 65 | 60663 | 52 1/2" | 60 | 60842 | | | | 22.75 | |
| | 19"(L) | 50346 | 53" | 65 | 60663 | 52 1/2" | 60 | 60842 | | | | 22.75 | |
| | 24" | 51407A | 62 1/2" | 77 | 60665 | 63" | 72 | 60844 | | | | 26.85 | |
| | 24"(L) | 50348 | 62 1/2" | 77 | 60665 | 63" | 72 | 60844 | | | | 26.85 | |
| | SPUR TYPE → | | 7 Tooth(S) | | 50129A | 7 Tooth | | 56855A | | | | 4.65 | |
| | MAC-15 ONLY! → | | 7 Tooth(S) | | 52878 | — | | — | | | | 4.65 | |
| | MAC → | | 7 Tooth | | 60918 | — | | — | | | | 6.50 | |
| | SUPER MAC → | | 7 Tooth | | 60919 | — | | — | | | | 9.95 | |
| (GEAR DRIVE) MAC-35A 35 39 33 SUPER 33 | 16" | 55204 | 44" | 54 | 60659 | 44" | 50 | 60838 | 44 1/2" | 44 | 60554 | \$18.90 | |
| | 18"(L) | 56506A | 49" | 60 | 60661 | 49" | 56 | 60840 | 49 1/2" | 49 | 60560 | 19.50 | |
| | 20" | 51405A | 53" | 65 | 60663 | 52 1/2" | 60 | 60842 | 52 1/2" | 53 | 60564 | 22.75 | |
| | 20"(L) | 50346 | 53" | 65 | 60663 | 52 1/2" | 60 | 60842 | 52 1/2" | 53 | 60564 | 22.75 | |
| | 26" | 51407A | 62 1/2" | 77 | 60665 | 63" | 72 | 60844 | 63 1/2" | 63 | 60566 | 26.85 | |
| | 26"(L) | 50348 | 62 1/2" | 77 | 60665 | 63" | 72 | 60844 | 63 1/2" | 63 | 60566 | 26.85 | |
| | 33" | 51409A | 76 1/2" | 94 | 60669 | 76" | 87 | 60848 | 77" | 76 | 60576 | 32.85 | |
| | Plunge Bow | — | — | — | — | — | — | — | 65 1/2" | 65 | 60570 | 28.10 | |
| | SPROCKETS | SPUR TYPE → | | 7 Tooth | | 52069A | 7 Tooth | | 56857A | 6 Tooth | | 36020B | 3.00 |
| | | " " → | | 7 Tooth | | — | 7 Tooth | | — | 7 Tooth(S) | | 36644A | 3.00 |
| SUPER MAC → | | 7 Tooth | | — | 7 Tooth | | — | 7 Tooth | | 61163 | 9.95 | | |
| (GEAR DRIVE) 890 ONE/80 840 SERIES 640 SUPER 55A ONE/60 SUPER 55 SERIES 55 | 16" | 55204 | 44 1/2" | 44 | 60554 | — | — | — | | | | 18.90 | |
| | 18"(L) | 56506A | 49 1/2" | 49 | 60560 | 48 1/2" | 43 | 60501 | | | | 19.50 | |
| | 20" | 51405A | 52 1/2" | 53 | 60564 | 54" | 48 | 60507 | | | | 22.75 | |
| | 20"(L) | 50346 | 52 1/2" | 53 | 60564 | 54" | 48 | 60507 | | | | 22.75 | |
| | 26" | 51407A | 63 1/2" | 63 | 60566 | 64 1/2" | 57 | 60509 | | | | 26.85 | |
| | 26"(L) | 50348 | 63 1/2" | 63 | 60566 | 64 1/2" | 57 | 60509 | | | | 26.85 | |
| | 33" | 51409A | 77" | 76 | 60576 | 77 1/2" | 69 | 60517 | | | | 32.85 | |
| | 38" | 51821A | 88" | 87 | 60578 | 89" | 79 | 60519 | | | | 37.75 | |
| | 44" | 51823A | 100" | 99 | 60580 | 101 1/2" | 90 | 60521 | | | | 43.15 | |
| | Plunge Bow | — | 65 1/2" | 65 | 60570 | 65 1/2" | 58 | 60511 | | | | 28.10 | |
| SPROCKETS | SPUR TYPE → | | 6 Tooth | | 36020B | 6 Tooth | | 36790A | | | | 3.00 | |
| | " " → | | 7 Tooth(S) | | 36644A | 7 Tooth | | 36791A | | | | 3.00 | |
| | SUPER MAC → | | 7 Tooth | | 61163 | 7 Tooth | | — | | | | 9.95 | |
| (GEAR DRIVE) 940 ONE/93 ONE/92 | 19" | 28398B | 53" | 47 | 60505 | | | | | | | \$22.75 | |
| | 25" | 28397B | 65 1/2" | 58 | 60511 | | | | | | | 28.10 | |
| | 31" | 28396B | 76 1/2" | 68 | 60515 | | | | | | | 32.85 | |
| | 37" | 28395B | 89" | 79 | 60519 | | | | | | | 37.75 | |
| | 43" | 28394B | 101 1/2" | 90 | 60521 | | | | | | | 43.15 | |
| | 51" | 56785 | 117" | 104 | 60523 | | | | | | | 50.20 | |
| | 60" | 56784 | 137 1/2" | 122 | 60525 | | | | | | | 60.00 | |
| | SPROCKETS | SPUR TYPE → | | 6 Tooth | | 36790A | 6 Tooth | | — | | | | 3.00 |
| " " → | | 7 Tooth(S) | | 36791A | 7 Tooth | | — | | | | 3.00 | | |
| (GEAR DRIVE) 49 77 47 73 3-25 4-30 4-30A | 18" | 28398B | 51 1/2" | 51 | 60562 | 53" | 47 | 60505 | | | | \$22.75 | |
| | 24" | 28397B | 64 1/2" | 64 | 60568 | 65 1/2" | 58 | 60511 | | | | 28.10 | |
| | 30" | 28396B | 76" | 75 | 60574 | 76 1/2" | 68 | 60515 | | | | 32.85 | |
| | 36" | 28395B | 88" | 87 | 60578 | 89" | 79 | 60519 | | | | 37.75 | |
| | 42" | 28394B | 100" | 99 | 60580 | 101 1/2" | 90 | 60521 | | | | 43.15 | |
| | Plunge Bow | — | 65 1/2" | 65 | 60570 | 65 1/2" | 58 | 60511 | | | | 28.10 | |
| | Plunge Bow | — | 68 1/2" | 68 | 60572 | 70" | 62 | 60513 | | | | 29.40 | |
| | SPROCKETS | SPUR TYPE → | | 6 Tooth | | 19434A | 6 Tooth | | 28681A | | | | 3.25 |
| | | " " → | | 7 Tooth | | 28366A | 7 Tooth | | 28680A | | | | 3.25 |

(L) Laminated

(S) Standard Equipment with Saw Unit.

SL, "F" AND "J" SERIES, McCULLOCH SUPER-MAC CHAIN PRICE LIST *

| CHAIN SAW MODEL (DIRECT DRIVE) | BAR | | SL-65 .404" PITCH .058 GAUGE | | | SL-7 7/16" PITCH .058 GAUGE | | | SL-8 1/2" PITCH .058 GAUGE | | | Price* |
|--|------------------|-------------|---------------------------------|--------------|----------|--------------------------------|--------------|----------|-------------------------------|--------------|----------|---------|
| | Cutting Capacity | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | |
| 790 ONE/70 740 SERIES 450 440 SUPER 44A 380 SUPER 44 D-44 | 14" | 55204 | 44" | 54 | 60803 | 44" | 50 | 60994 | 44 1/2" | 44 | 60874 | \$18.90 |
| | 17"(L) | 56506A | 49" | 60 | 60805 | 49" | 56 | 60996 | 49 1/2" | 49 | 60875 | 19.50 |
| | 19" | 51405A | 53" | 65 | 60807 | 52 1/2" | 60 | 60998 | 52 1/2" | 53 | 60876 | 22.75 |
| | 19"(L) | 50346 | 53" | 65 | 60807 | 52 1/2" | 60 | 60998 | 52 1/2" | 53 | 60876 | 22.75 |
| | 24" | 51407A | 62 1/2" | 77 | 60809 | 63" | 72 | 61000 | 63 1/2" | 63 | 60877 | 26.85 |
| | 24"(L) | 50348 | 62 1/2" | 77 | 60809 | 63" | 72 | 61000 | 63 1/2" | 63 | 60877 | 26.85 |
| | 31" | 51409A | 76 1/2" | 94 | 60813 | 76" | 87 | 61004 | 77" | 76 | 60880 | 32.85 |
| | 36" | 51821A | — | — | — | — | — | — | — | — | — | — |
| | 42" | 51823A | — | — | — | — | — | — | — | — | — | — |
| | SPROCKETS | SPUR TYPE → | | 7 Tooth(S) | | 51774B | 7 Tooth | | 51178C | 6 Tooth | | 51793B |
| MAC → | | | 7 Tooth | | 60916 | | | | | | | 6.50 |
| SUPER MAC → | | | 7 Tooth | | 60917 | | | | 6 Tooth | | 61185 | 9.95 |
| " " → | | | | | | | | 7 Tooth | | 61190 | 9.95 | |

| (DIRECT DRIVE) | BAR | | SL-65 .404" PITCH .058 GAUGE | | | SL-7 7/16" PITCH .058 GAUGE | | | SL-8 1/2" PITCH .058 GAUGE | | | Price* |
|---|------------------|----------|---------------------------------|--------------|----------|--------------------------------|--------------|----------|-------------------------------|--------------|----------|---------|
| MAC-15 ONE/50 300 SERIES 250 200 ONE/40 D-30 SERIES D-36 | Cutting Capacity | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | |
| MAC-15 ONE/50 300 SERIES 250 200 ONE/40 D-30 SERIES D-36 | 14" | 55204 | 44" | 54 | 60803 | 44" | 50 | 60994 | 44 1/2" | 44 | 60874 | \$18.90 |
| | 17"(L) | 56506A | 49" | 60 | 60805 | 49" | 56 | 60996 | 49 1/2" | 49 | 60875 | 19.50 |
| | 19" | 51405A | 53" | 65 | 60807 | 52 1/2" | 60 | 60998 | 52 1/2" | 53 | 60876 | 22.75 |
| | 19"(L) | 50346 | 53" | 65 | 60807 | 52 1/2" | 60 | 60998 | 52 1/2" | 53 | 60876 | 22.75 |
| | 24" | 51407A | 62 1/2" | 77 | 60809 | 63" | 72 | 61000 | 63 1/2" | 63 | 60877 | 26.85 |
| | 24"(L) | 50348 | 62 1/2" | 77 | 60809 | 63" | 72 | 61000 | 63 1/2" | 63 | 60877 | 26.85 |
| | SPUR TYPE → | | 7 Tooth(S) | | 50129A | 7 Tooth | | 56855A | 6 Tooth | | 36020B | 3.00 |
| | MAC-15 ONLY! → | | 7 Tooth | | 52878 | — | — | — | 7 Tooth(S) | | 36644A | 3.00 |
| | MAC → | | 7 Tooth | | 60918 | | | | 7 Tooth | | 61163 | 9.95 |
| | SUPER MAC → | | 7 Tooth | | 60919 | | | | | | | |

| (GEAR DRIVE) | BAR | | SL-65 .404" PITCH .058 GAUGE | | | SL-7 7/16" PITCH .058 GAUGE | | | SL-8 1/2" PITCH .058 GAUGE | | | Price* |
|---------------------------------------|------------------|----------|---------------------------------|--------------|----------|--------------------------------|--------------|----------|-------------------------------|--------------|----------|---------|
| MAC-35A 35 39 33 SUPER 33 | Cutting Capacity | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | |
| MAC-35A 35 39 33 SUPER 33 | 16" | 55204 | 44" | 54 | 60803 | 44" | 50 | 60994 | 44 1/2" | 44 | 60874 | \$18.90 |
| | 18"(L) | 56506A | 49" | 60 | 60805 | 49" | 56 | 60996 | 49 1/2" | 49 | 60875 | 19.50 |
| | 20" | 51405A | 53" | 65 | 60807 | 52 1/2" | 60 | 60998 | 52 1/2" | 53 | 60876 | 22.75 |
| | 20"(L) | 50346 | 53" | 65 | 60807 | 52 1/2" | 60 | 60998 | 52 1/2" | 53 | 60876 | 22.75 |
| | 26" | 51407A | 62 1/2" | 77 | 60809 | 63" | 72 | 61000 | 63 1/2" | 63 | 60877 | 26.85 |
| | 26"(L) | 50348 | 62 1/2" | 77 | 60809 | 63" | 72 | 61000 | 63 1/2" | 63 | 60877 | 26.85 |
| | 33" | 51409A | 76 1/2" | 94 | 60813 | 76" | 87 | 61004 | 77" | 76 | 60880 | 32.85 |
| | Plunge Bow | | — | — | — | — | — | — | 65 1/2" | 65 | 60878 | 28.10 |
| | SPUR TYPE → | | 7 Tooth | | 52069A | 7 Tooth | | 56857A | 6 Tooth | | 36020B | 3.00 |
| | " " → | | 7 Tooth | | 52069A | 7 Tooth | | 56857A | 7 Tooth(S) | | 36644A | 3.00 |
| SUPER MAC → | | | | | | | | 7 Tooth | | 61163 | 9.95 | |

| (GEAR DRIVE) | BAR | | SL-8 1/2" PITCH .058 GAUGE | | | Price* |
|--|------------------|----------|-------------------------------|--------------|----------|---------|
| 890 ONE/80 840 SERIES 640 SUPER 55A ONE/60 SUPER 55 SERIES 55 | Cutting Capacity | Part No. | Chain Length | Center Links | Part No. | |
| 890 ONE/80 840 SERIES 640 SUPER 55A ONE/60 SUPER 55 SERIES 55 | 16" | 55204 | 44 1/2" | 44 | 60874 | \$18.90 |
| | 18"(L) | 56506A | 49 1/2" | 49 | 60875 | 19.50 |
| | 20" | 51405A | 52 1/2" | 53 | 60876 | 22.75 |
| | 20"(L) | 50346 | 52 1/2" | 53 | 60876 | 22.75 |
| | 26" | 51407A | 63 1/2" | 63 | 60877 | 26.85 |
| | 26"(L) | 50348 | 63 1/2" | 63 | 60877 | 26.85 |
| | 33" | 51409A | 77" | 76 | 60880 | 32.85 |
| | Plunge Bow | | 65 1/2" | 65 | 60878 | 28.10 |
| | SPUR TYPE → | | 6 Tooth | | 36020B | 3.00 |
| | " " → | | 7 Tooth | | 36644A | 3.00 |
| SUPER MAC → | | 7 Tooth | | 61163 | 9.95 | |

| (GEAR DRIVE) | BAR | | "F" 1/2" PITCH .074 GAUGE | | | "J" .822" PITCH .074 GAUGE | | | Price* |
|-----------------------------|------------------|----------|------------------------------|--------------|----------|-------------------------------|--------------|----------|--------|
| 99 7-55 5-49 1225A | Cutting Capacity | Part No. | Chain Length | Center Links | Part No. | Chain Length | Center Links | Part No. | |
| 99 7-55 5-49 1225A | 30" | 24792 | 84 1/2" | 84 | 24753 | 84" | 51 | 24765 | 36.25 |
| | 40" | 24793 | 104 1/2" | 104 | 24752 | 104" | 63 | 24766 | 44.85 |
| | 50" | 24794 | 124 1/2" | 124 | 24751 | 123 1/2" | 75 | 24767 | 53.45 |
| | 60" | 24795 | 144 1/2" | 144 | 24748 | 143 1/2" | 87 | 24768 | 62.00 |
| SPROCKETS | SPUR TYPE → | | 9 Tooth | | 18261A | 6 Tooth | | 18796A | 4.50 |


(L) Laminated (S) Standard Equipment with Saw Unit.

McCULLOCH SUPER-MAC CHAIN AND SPROCKETS
 McCULLOCH AUTO-MAC CHAIN, BARS AND SPROCKETS
 McCULLOCH BARS, CHAIN (for speed tip bar, roller-mac bar and paddle bow) AND SPROCKET BUSHING/BEARINGS
 McCULLOCH SUPER-MAC CHAIN REPAIR PARTS
 McCULLOCH SUPER-MAC CHAIN REELS
 McCULLOCH CHAIN TOOLS AND ACCESSORIES


*Manufacturers suggested list price
 Prices and specifications subject to change without notice. Prices F.O.B. Distributor's Warehouse

McCULLOCH AUTO-MAC

McCulloch's exclusive bar, chain and sprocket combination, developed as the perfect mate to the BP-1 engine, is now available for all McCulloch models (except the MAC 15, MAC 35A and the 940).

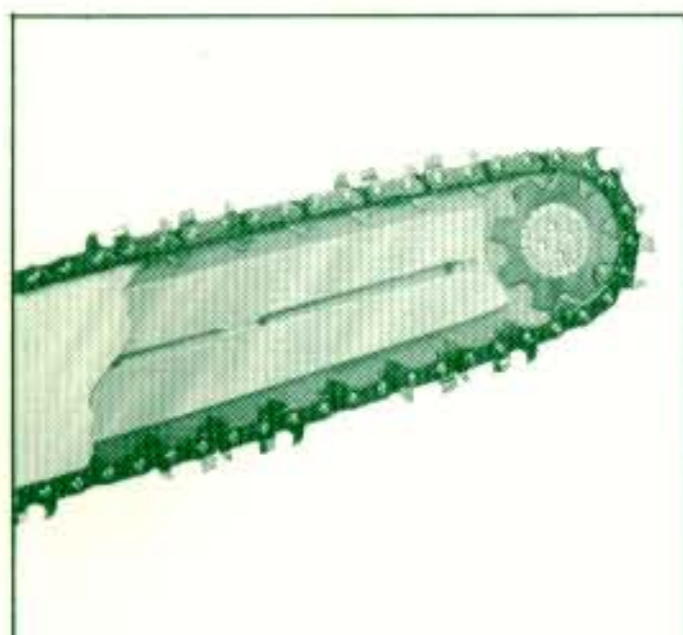


AUTO-MAC Bar with Sprocket Tip. As the chain passes around the lightweight Auto-Mac bar, a sprocket wheel at the tip engages tangs and actually lifts the chain to ease it around the end of the bar in a friction-free ride. The Auto-Mac chain is constantly engaged between bar tip and engine sprocket in a "belt-drive action" that results in the smoothest cutting, plus longer bar and chain life.

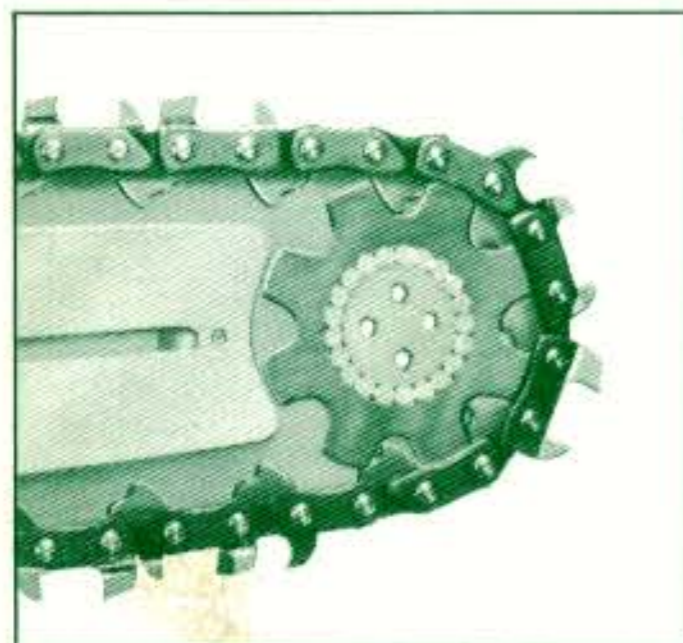


The AUTO-MAC Bar has Internal Lubrication. Oil is pressure pumped through the bar to the tip where centrifugal force completely lubricates the sprocket, bar, and chain. Oil spin-off, flooding and waste are eliminated. Pressure oiling keeps the lube channels free-flowing and effective. Auto-Mac bars are especially suited for McCulloch saw models having automatic oiling. Auto-Mac bars can be installed on models with manual oilers. However, your customers should be advised that frequent oiling is a **necessity** to properly lubricate and protect the nose sprocket.


AUTO-MAC CHAIN / helps you cut easier, lasts a long time

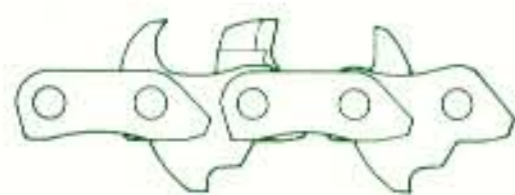

McCulloch AR-8 is a revolutionary new chain that features exceptional stability and cutting speed in all types of wood. AR-8's exclusive design assures longer cutting edge life with greater cutting speed. The chain may be sharpened with the grinder on the BP-1 or may be hand filed when used on other McCulloch saws equipped with Auto-Mac bar and sprocket.

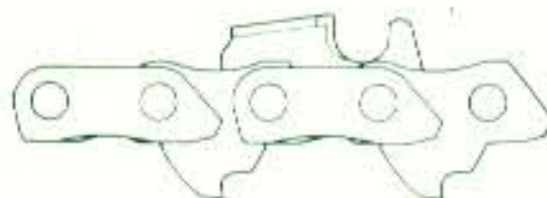

McCulloch AC-8 is similar to the A-8 chain, but has a curved cutter tooth like Super-Mac. It must be hand filed. AC-8 is made for use on all McCulloch direct drive and gear drive saws fitted with the Auto-Mac Bar and drive sprocket (except MAC 35A, MAC 15 and 940). This bar-chain combination modernizes your saw, makes old saws cut like new.

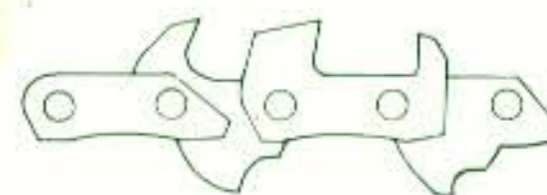

McCulloch A-8 is made for the BP-1. At the touch of a button it sharpens itself in seconds. Depth gauges are automatically lowered as the chain is sharpened. Upright and perfectly uniform cutter teeth cut wood on a direct perpendicular for top cutting efficiency. Cutter teeth are chrome plated to hold an edge longer, and each component is stress tested to insure equal strength throughout the chain. The exclusive A-8 design lets you utilize full cutting power of the BP-1 engine.

AUTO-MAC CHAIN AND SPROCKET PRICE LIST*

| CHAIN SAW MODEL | BAR | | Chain Length | | Center Links | | ALL 1/2" PITCH — .074 GAUGE | | | | | |
|-----------------|--------|------------------|--------------|-----------------------|--------------|-----------------------|-----------------------------|---------|-------------|---------|-------------|--------|
| | | | | | | | A-8 | | AC-8 | | AR-8 | |
| | | | | | | | Part Number | Price* | Part Number | Price* | Part Number | Price* |
| 200 | 740 | Cutting Capacity | Part No. | 44" | 44 | Not Available | 59837 | \$18.90 | 59873 | \$19.30 | | |
| 250 | 440 | | | | | | | | | | 19" | 59437A |
| ONE/40 | 380 | 23" | 59438A | 60" | 60 | | 59841 | 25.75 | 59875 | 26.25 | | |
| SERIES | ONE/70 | 27" | 59858A | 68" | 68 | | 59865 | 29.20 | 59879 | 29.80 | | |
| ONE/50 | SERIES | Sprocket → | | 1/2" Pitch 6 Tooth | | | | 59847 | 5.95 | 59847 | 5.95 | |
| SERIES | D-30 | One/70 Series → | | 1/2" Pitch 6 Tooth | | | 59850 | 5.95 | 59850 | 5.95 | | |
| D-44 | D-36 | | | | | | | | | | | |
| SUPER 44A | | | | | | | | | | | | |
| SUPER 44 | | | | | | | | | | | | |
| BP-1 | | 17" | 59436A | 44" | 44 | 59454 | \$18.90 | 59837 | 18.90 | 59873 | 19.30 | |
| | | 21" | 59437A | 52" | 52 | 59452 | 22.30 | 59839 | 22.30 | 59828 | 22.75 | |
| | | 25" | 59438A | 60" | 60 | 59456 | 25.75 | 59841 | 25.75 | 59875 | 26.25 | |
| | | 29" | 59858A | 68" | 68 | 59867 | 29.20 | 59865 | 29.20 | 59879 | 29.80 | |
| | | For Plunge Bow | | 62" | 62 | 59572 | 26.60 | 59843 | 26.60 | 59877 | 27.15 | |
| | | Sprocket → | | | | 1/2" Pitch 6 Tooth | | 59420 | 4.00 | 59420 | 4.00 | 59420 |
| 640 | | 17" | 59436A | 44" | 44 | Not Available | 59837 | 18.90 | 59873 | 19.30 | | |
| | | ONE/63 | 840 | 21" | 59437A | | 52" | 52 | 59839 | 22.30 | 59828 | 22.75 |
| | | ONE/62 | ONE/86 | 25" | 59438A | | 60" | 60 | 59841 | 25.75 | 59875 | 26.25 |
| | | ONE/61 | ONE/85 | 29" | 59858A | | 68" | 68 | 59865 | 29.20 | 59879 | 29.80 |
| | | ONE/60 | ONE/82 | For Plunge Bow | | | 62" | 62 | 59843 | 26.60 | 59877 | 27.15 |
| | | Sprocket → | | | | 1/2" Pitch 6 Tooth | | 59420 | 4.00 | 59420 | 4.00 | 59420 |
| SUPER 55A | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| SUPER 55 | | | | | | | | | | | | |

AUTO-MAC SPROCKET BEARINGS

| Sprocket Part No. | Bearing Part No. | Bearing Price* |
|-------------------|------------------|----------------|
| 59847 | 110086 | \$.70 |
| 59850 | 103688 | .70 |

SPROCKET SHIMS

| Part No. | Shims | Price* |
|----------|-------|--------|
| 59210 | .003" | .15 |
| 59211 | .010" | .15 |
| 59212 | .015" | .15 |

AUTO-MAC CHAIN REPAIR PARTS

| Part Name | A-8 | | AC-8 | | AR-8 | |
|--------------------|----------|--------|----------|--------|----------|--------|
| | Part No. | Price* | Part No. | Price* | Part No. | Price* |
| Center Link | 59312 | .15 | 59312 | .15 | 59312 | .15 |
| L.H. Offset Cutter | 59317 | .45 | — | — | — | — |
| R.H. Offset Cutter | 59318 | .45 | — | — | — | — |
| Center Cutter | 59315 | .45 | — | — | 59846 | .45 |
| L.H. Side Cutter | 59319 | .45 | 59530 | .50 | 59822 | .60 |
| R.H. Side Cutter | 59320 | .45 | 59531 | .50 | 59823 | .60 |
| Preset Side Link | 59626 | .20 | 59626 | .20 | 59626 | .20 |
| L.H. Side Link | 59313 | .10 | 59313 | .10 | 59313 | .10 |
| R.H. Side Link | 59314 | .10 | 59314 | .10 | 59314 | .10 |
| Rivet | 59321 | .10 | 59321 | .10 | 59321 | .10 |
| Repair Kit | 59832 | .60 | 59832 | .60 | 59832 | .60 |

AUTO-MAC BARS

| Part No. | Thickness | Price* |
|----------|-----------|---------|
| 59436 | .200 | \$22.00 |
| 59437 | .200 | 27.00 |
| 59438 | .200 | 32.00 |
| 59858 | .200 | 37.00 |

TIP WHEEL FOR AUTO-MAC BAR

| Part No. | Price* |
|----------|---------|
| 59881A | \$10.00 |

AC-8 CHAIN REELS

| Length | Part No. | List Price* |
|--------|----------|-------------|
| 25' | 56974 | 128.75 |
| 50' | 56977 | 253.00 |
| 100' | 56979 | 495.00 |

*Manufacturers suggested list price

Prices and specifications subject to change without notice. Prices F.O.B. Distributor's Warehouse

McCULLOCH AUTO-MAC CHAIN, BARS AND SPROCKETS
 McCULLOCH BARS, CHAIN (for speed tip bar, roller-mac bar and paddle bow) AND SPROCKET BUSHING/BEARINGS
 McCULLOCH SUPER-MAC CHAIN REPAIR PARTS
 McCULLOCH SUPER-MAC CHAIN REELS
 McCULLOCH CHAIN TOOLS AND ACCESSORIES
 CUT LENGTH PRICES
 McCULLOCH OIL, PAINT AND SAFETY HATS

McCULLOCH BARS & SPROCKETS



Solid and Laminated Bars. All McCulloch bars have long wearing alloys welded to their tips for longer life at the point of most stress. Highest quality steels, precision ground for exact dimensions. Standard equipment on all McCulloch saws. Available in 14" to 60" lengths.



Speed-Tip Bar. A wheel at the tip of the bar reduces friction and passes full engine power to the chain for faster, smoother cutting. The Speed-Tip is designed to provide smooth delivery of chain on and off the roller. Speed-Tip is replaceable. Bar fits all McCulloch models except 940.

Roller-Mac Bar. This bar has many of the same outstanding features of the Speed-Tip in addition to a number of exclusives. It is a solid bar with the conventional roller wheel riveted to the nose. It has a section of hard-facing added to the rails behind the nose roller which increases the life of the bar. Fits all McCulloch models except 940.


Paddle Bow. A lightweight 24" bow that allows you to plunge-cut from a standing position. Double spikes keep chain out of dirt and improve feed and control. Large radius at the nose of the bow reduces chain wear. Ideal for land clearing, pulp or brush cutting or tree trimming. Available for use with all one-man saws except MAC-15.



McCulloch SUPER-MAC Sprocket. On-the-job reports prove the SUPER-MAC sprocket is the finest sprocket ever developed for your McCulloch Chain Saw. Extra-long wear and superior running characteristics let the SUPER-MAC outlast ordinary sprockets up to four or more times — give you longer chain life, faster, more efficient cutting. Advanced "rim-type" design has dual rails which lift and support chain side-links, while recessed sprocket teeth drive the chain. Chain is held in perfect alignment. Jump, wobble and pounding are reduced to a minimum.

SPROCKET INFORMATION

These outlines

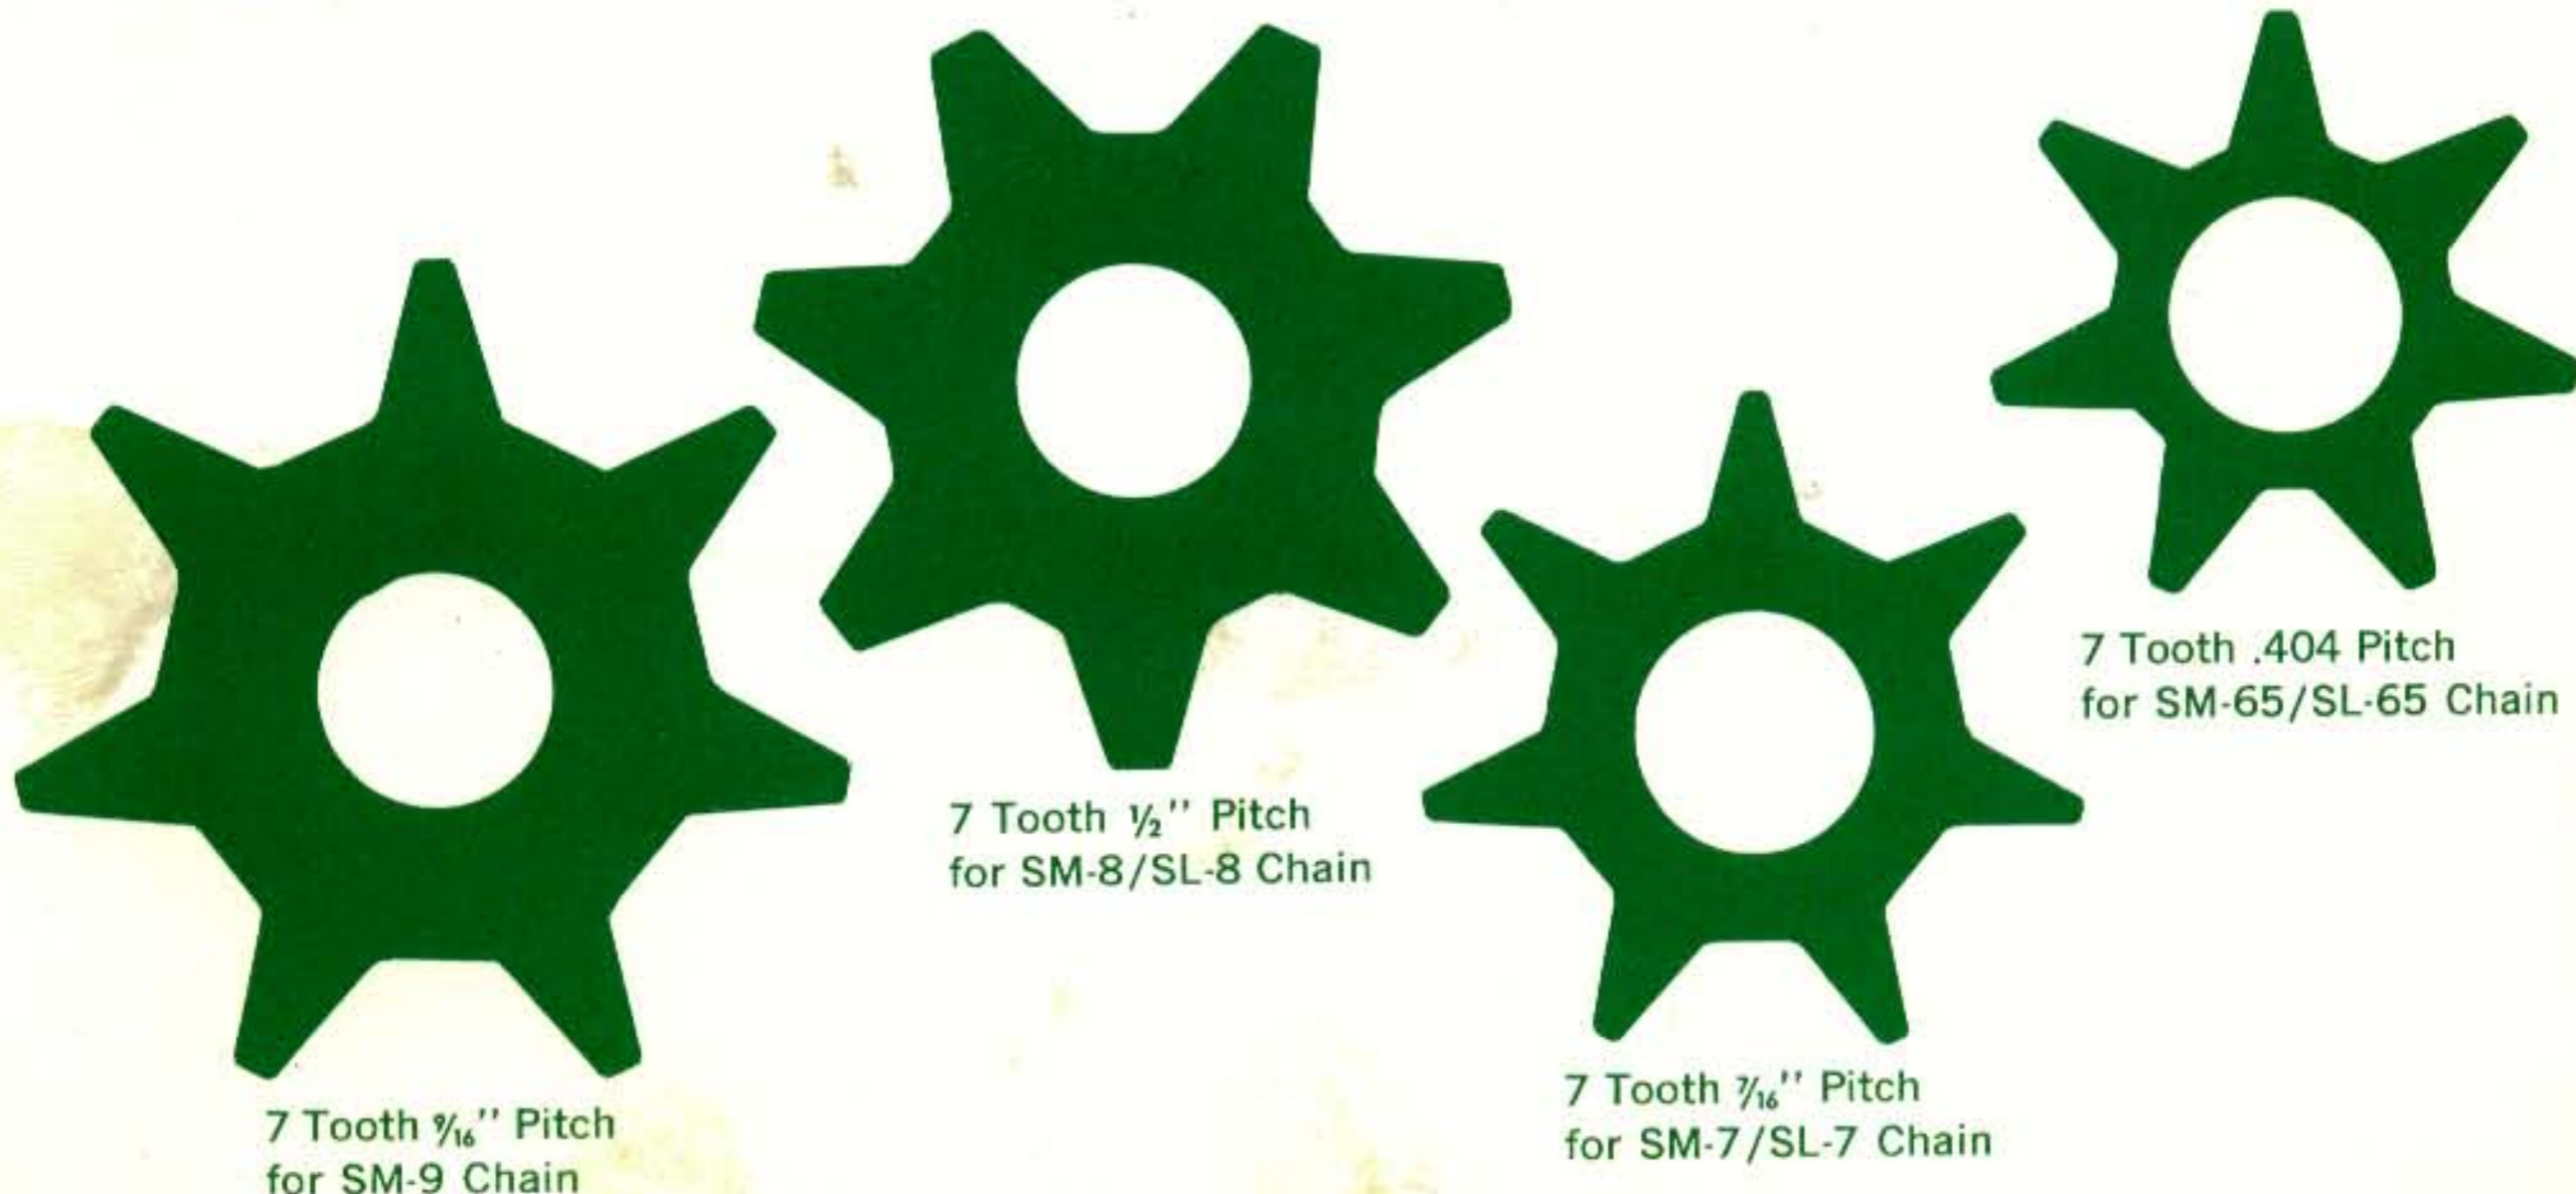

7 Tooth $\frac{7}{16}$ " Pitch
for SM-9 Chain

7 Tooth $\frac{1}{2}$ " Pitch
for SM-8/SL-8 Chain

7 Tooth $\frac{7}{16}$ " Pitch
for SM-7/SL-7 Chain

7 Tooth .404 Pitch
for SM-65/SL-65 Chain

BAR PRICE LIST* (L) Laminated

| Cutting Capacity | Part No. | Thickness | Price* |
|------------------|----------|-----------|--------|
| 14"-16" | 55204 | .185 | 21.50 |
| 17"-18" (L) | 56506A | .185 | 16.50 |
| 19"-20" | 51405A | .185 | 25.15 |
| 19"-20" (L) | 50346 | .185 | 22.65 |
| 24"-26" | 51407A | .185 | 30.25 |
| 24"-26" (L) | 50348 | .185 | 27.75 |
| 31"-33" | 51409A | .185 | 37.10 |
| 36"-38" | 51821A | .185 | 41.80 |
| 42"-44" | 51823A | .185 | 44.80 |
| <hr/> | | | |
| 19" | 28398B | .200 | 23.60 |
| 25" | 28397B | .200 | 30.25 |
| 31" | 28396B | .200 | 37.10 |
| 37" | 28395B | .200 | 39.80 |
| 43" | 28394B | .200 | 42.80 |
| 51" | 56785 | .200 | 59.15 |
| 60" | 56784 | .200 | 66.90 |
| <hr/> | | | |
| 30" | 24792 | .220 | 34.80 |
| 40" | 24793 | .220 | 40.95 |
| 50" | 24794 | .220 | 47.20 |
| 60" | 24795 | .220 | 53.40 |

ROLLER-MAC BAR

| Cutting Capacity | Part Number | Price* |
|------------------|-------------|---------|
| 31"-33" | 58978 | \$41.95 |

CHAINS FOR ROLLER-MAC BAR

| Cutting Capacity | Chain Type | Center Links | Chain Length | Part Number | Price* |
|------------------|------------|--------------|--------------|-------------|---------|
| 31"-33" | SM65 | 94 | 76½" | 60669 | \$32.85 |
| | SM7 | 87 | 76" | 60848 | 32.85 |
| | SM8 | 76 | 77" | 60576 | 32.85 |
| | SM9 | 69 | 77½" | 60517 | 32.85 |
| | SL65 | 94 | 76½" | 60813 | 32.85 |
| | SL7 | 87 | 76" | 61004 | 32.85 |
| | SL8 | 76 | 77" | 60880 | 32.85 |

ROLLER-MAC REPLACEABLE WHEEL

| Part Number | Price* |
|-------------|---------|
| 58981 | \$10.00 |

SPEED TIP BARS

| Cutting Capacity | Part No. | Price* |
|------------------|----------|---------|
| 19"-20" | 56495 | \$27.00 |
| 24"-26" | 56768 | 32.00 |

(On Direct Drive)

CHAINS FOR SPEED TIP BARS

| Cutting Capacity | Chain Type | Center Links | Chain Length | Part Number | Price* |
|------------------|------------|--------------|--------------|-------------|---------|
| 19"-20" | SM65 | 65 | 53" | 60663 | \$22.75 |
| | SM7 | 60 | 52½" | 60842 | 22.75 |
| | SM8 | 53 | 52½" | 60564 | 22.75 |
| | SL65 | 65 | 53" | 60807 | 22.75 |
| | SL7 | 60 | 52½" | 60998 | 22.75 |
| | SL8 | 53 | 52½" | 60876 | 22.75 |
| <hr/> | | | | | |
| 24"-26" | SM65 | 77 | 62½" | 60665 | 26.85 |
| | SM7 | 72 | 63" | 60844 | 26.85 |
| | SM8 | 63 | 63½" | 60566 | 26.85 |
| | SL65 | 77 | 62½" | 60809 | 26.85 |
| | SL7 | 72 | 63" | 61000 | 26.85 |
| | SL8 | 63 | 63½" | 60877 | 26.85 |

SPEED TIP REPLACEABLE WHEEL

| Part Number | Price* |
|-------------|---------|
| 56700 | \$10.00 |

PADDLE BOW

| | Part Number | Price* |
|------------|-------------|---------|
| Hard Faced | 52571 | \$41.50 |

CHAINS FOR PADDLE BOW

| Chain Type | Center Links | Chain Length | Part Number | Price* |
|------------|--------------|--------------|-------------|---------|
| SM65 | 84 | 68½" | 60667 | \$29.40 |
| SM7 | 78 | 68½" | 60846 | 29.40 |
| SM8 | 68 | 68½" | 60572 | 29.40 |
| SM9 | 62 | 70" | 60513 | 29.40 |
| SL65 | 84 | 68½" | 60811 | 29.40 |
| SL7 | 78 | 68½" | 60650 | 29.40 |
| SL8 | 68 | 68½" | 60879 | 29.40 |

are for McCulloch Spur Sprockets of various pitches — to identify the pitch of a sprocket simply place the sprocket over the proper silhouette.



6 Tooth 1/16" Pitch for SM-9 Chain



6 Tooth 1/2" Pitch for SM-8/SL-8 Chain

It is of utmost importance that the sprocket bearing or bushing be inspected and lubricated periodically. If the bearing/bushing is damaged or badly worn it must be replaced. Use the following table to identify the correct bearing/bushing. Always lubricate the bearing/bushing periodically to assure long life.

| Sprocket Part No. | Bearing/Bushing Part No. | Bearing Price* |
|-------------------|--------------------------|----------------|
| 50129A | 50128 | \$.50 |
| 56855A | 50128 | .50 |
| 50363A | 50128 | .50 |
| 52878 | 50128 | .50 |
| <hr/> | | |
| 51774B | 103688 | \$.70 |
| 51178B | 103688 | .70 |
| 51793B | 103688 | .70 |
| 61185 | 103688 | .70 |
| 61190 | 103688 | .70 |
| <hr/> | | |
| 56923 | 103688 | \$.70 |
| 56924 | 110086 | \$.70 |

*Manufacturers suggested list price

Prices and specifications subject to change without notice. Prices F.O.B. Distributor's Warehouse

McCULLOCH BARS, CHAIN (for speed tip bar, roller-mac bar and paddle bow) AND SPROCKET BUSHING/BEARINGS

McCULLOCH SUPER-MAC CHAIN REPAIR PARTS

McCULLOCH SUPER-MAC CHAIN REELS

McCULLOCH CHAIN TOOLS AND ACCESSORIES

CUT LENGTH PRICES

McCULLOCH OIL, PAINT AND SAFETY HATS

CHAIN REPAIR PARTS

A properly repaired chain is almost as strong as a new one and should continue to give good service for as long as there is any tooth left to sharpen. A poorly repaired chain isn't very strong and usually breaks again at the point where it was repaired. This usually happens when cutting. So, always repair SUPER-MAC saw chains properly with SUPER-MAC chain parts.



1. REMOVING RIVETS

Rivets may be removed with a chain breaker or a flat file. Chain breakers punch the rivet through the side links and cutters. Use caution not to damage chain unnecessarily.

2. REPLACING DAMAGED CUTTERS


Remove the rivets and old cutter and its matching side link. Install a new side link when you install the new cutter. Use a preset side link; preset side links come with the rivets already installed. If the bottoms of the cutters and side links in the chain are worn from much use, file the bottoms of the new cutter and side link to match the old cutters and side links. If you don't use a preset side link, make sure the stamped side of the side link goes toward the outside of the chain or you'll end up with a tight joint. Hold the chain parts firmly and use a rivet spinner or peen the rivets lightly to form heads.

After the new cutter is installed in the chain, file the tooth back to match the old teeth and lower the depth gauge to match the old depth gauges.

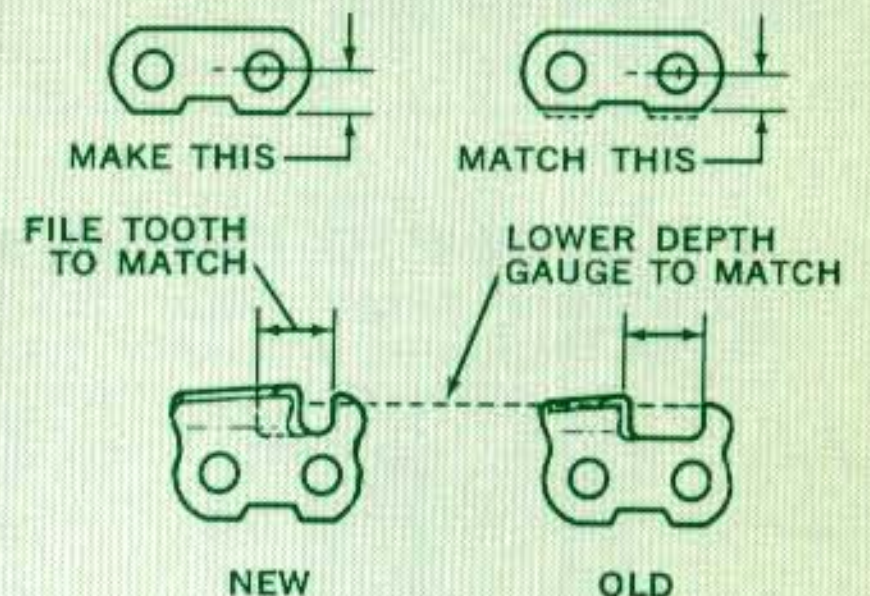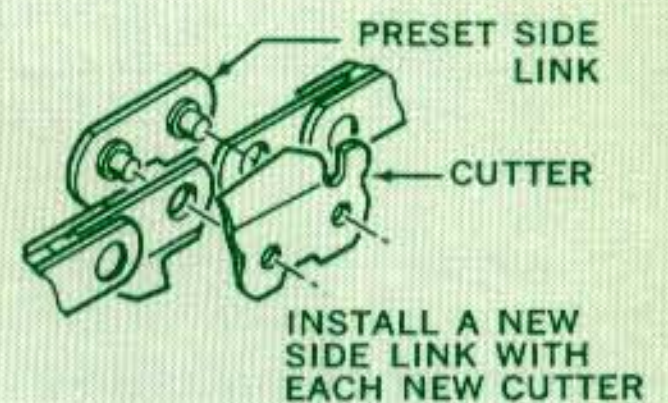


3. REPLACING DAMAGED SIDE LINKS

Remove the rivets and damaged side links. Use a preset and a plain side link when rejoining chain. (You can use two plain side links and two rivets, but it takes longer and you may not do as good a job.) And remember, the stamped side of the plain side link must go toward the outside of the chain. Hold the chain parts firmly together and spin or lightly peen the rivets to form heads.

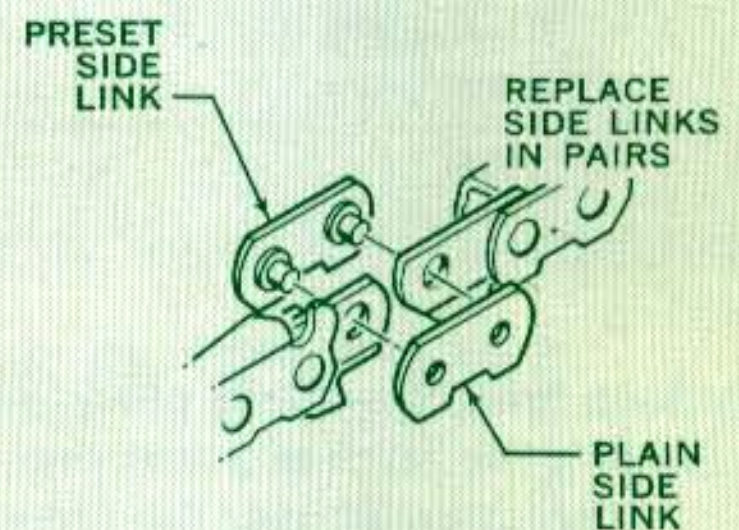


4. REPLACING DAMAGED CENTER LINKS

When replacing damaged center links, you'll have to remove all four of the links attached to the damaged center link. Install your new center link with two preset side links and two plain side links or a plain side link and cutter. Hold the chain parts firmly together and spin or lightly peen the rivets to form heads.

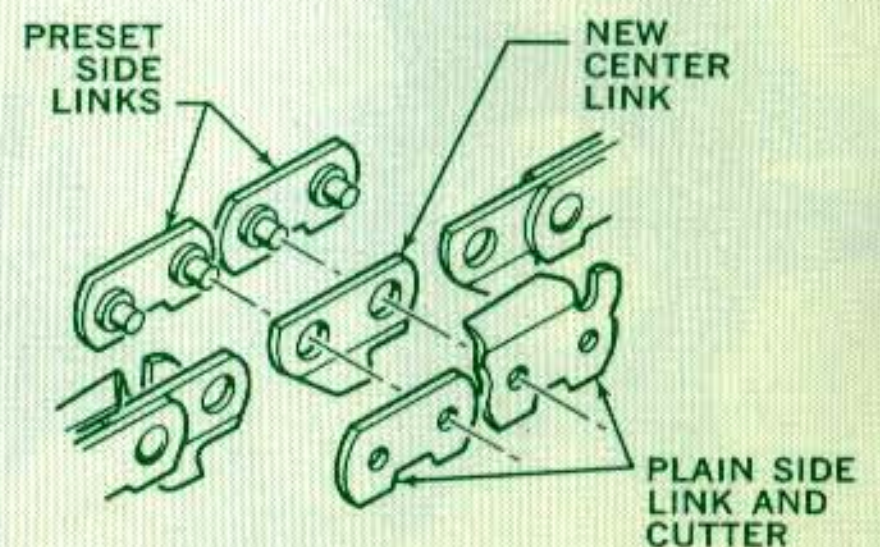

5. REPAIRING DAMAGED CENTER LINKS

Center link tangs can be damaged by the bar and the sprocket. Keep the tip of the tang sharp so that it can keep the bar groove clean. Use a 1/4-inch diameter file to reshape the tang. Keep the sides of the tang smooth with a flat file. After you finish repairing the damaged tangs, check the bar and sprocket and correct the cause of the damage.

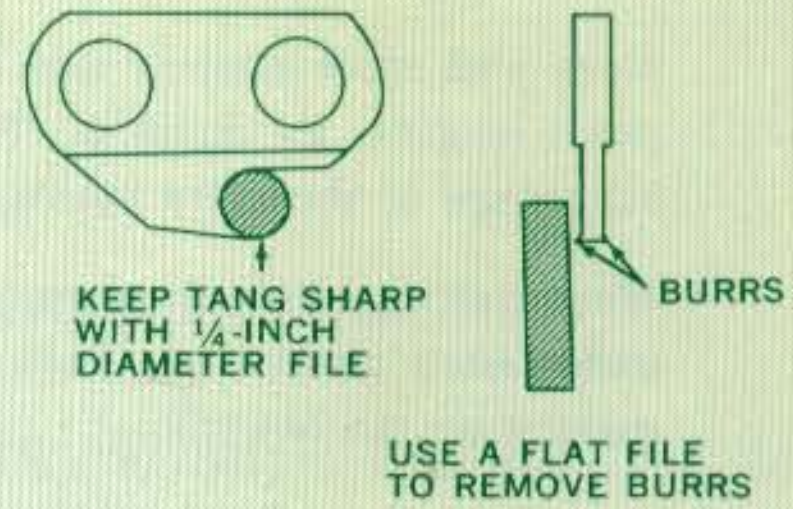

6. REPLACING DAMAGED MASTER LINKS



Replace damaged master links in pairs. The master pin hole (the larger of the two holes in each master link) goes toward the rear of the chain to prevent damage to the master pin hole by the sprocket teeth.



SUPER-MAC CHAIN REPAIR PARTS

| Part Name | SM-65 | SM-7 | SM-8 | SM-9 | SL-65 | SL-7 | SL-8 | Price* |
|-------------------------|-------|-------|-------|-------|-------|-------|-------|--------|
| R.H. Cutter | 60640 | 60640 | 60490 | 60486 | 60680 | 60680 | 60795 | .50 |
| L.H. Cutter | 60639 | 60639 | 60489 | 60485 | 60679 | 60679 | 60794 | .50 |
| R.H. Cutter Assy. | 60677 | 60677 | — | — | 60993 | 60993 | — | .60 |
| Side Link | 60736 | 60736 | 56429 | 28474 | 60736 | 60736 | 56429 | .10 |
| Preset Side Link | 60655 | 60655 | 56556 | 28874 | 60655 | 60655 | 56556 | .20 |
| Central Link .058 | 60549 | 60834 | 60488 | 60487 | 60549 | 60834 | 60488 | .15 |
| Center Link .063 | 60721 | 60833 | 60547 | 60546 | 60721 | 60833 | 60547 | .15 |
| Rivet | 52453 | 52453 | 28837 | 28379 | 52453 | 52453 | 28837 | .10 |
| Master Pin | 52454 | 52454 | 28392 | 28392 | 52454 | 52454 | 28392 | .10 |
| L.H. Master Link | 60654 | 60654 | 56509 | 28475 | 60654 | 60654 | 56509 | .15 |
| Preset R.H. Master Link | 60652 | 60652 | 56557 | 28877 | 60652 | 60652 | 56557 | .20 |
| Repair Kit .058 | 60656 | 60832 | 60551 | 60540 | 60656 | 60832 | 60551 | .60 |
| Repair Kit .063 | 60687 | 60934 | 60598 | 60548 | 60687 | 60934 | 60598 | .60 |

*Manufacturers suggested list price

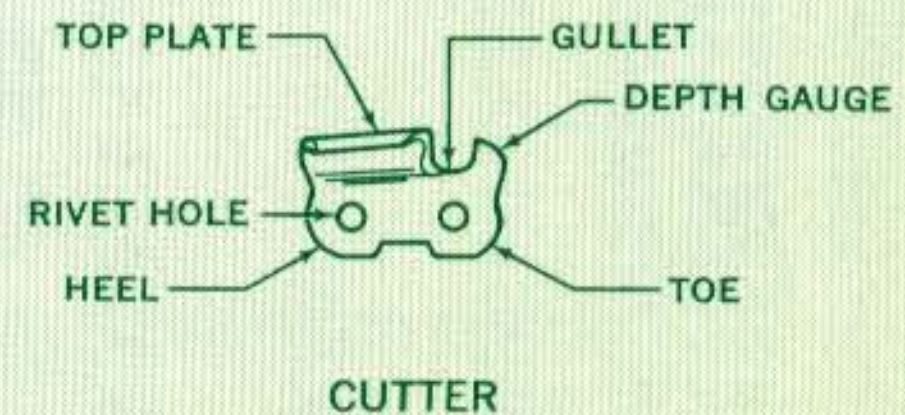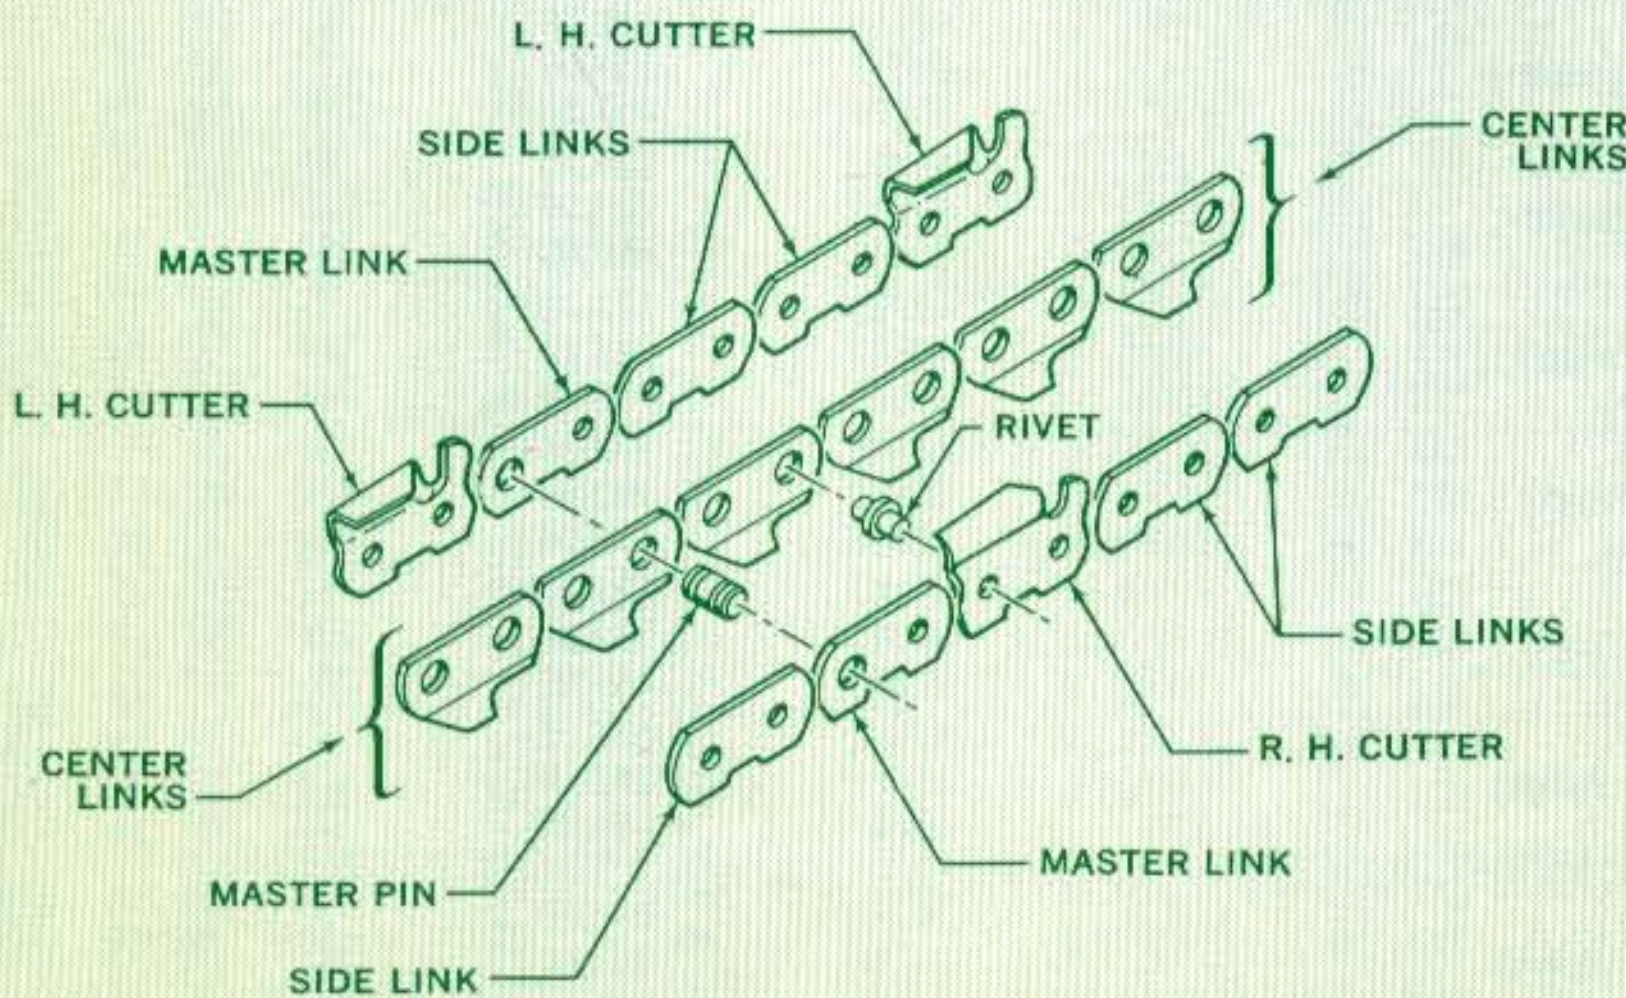

McCULLOCH CHAIN REELS

More and more dealers and customers purchase McCulloch chain in reels and then cut their own chain lengths. By doing so, they always have the right length of chain on hand and are taking advantage of the extra savings involved in buying reels over cut lengths.

When cutting chain from reels, always refer to the measurements or number of center links listed under each chain type. Each reel of chain includes a quantity of master links and repair kits for making up cut lengths.

| | Type | Length | Part No. | Price* | No. of Repair Kits |
|--------------------------|---------------------|--------|----------|--------|--------------------|
| SM CHAIN | SM65 | 25' | 60671 | 128.75 | 6 |
| | (.058" Gauge) | 50' | 60673 | 253.00 | 12 |
| | Full Complement) | 100' | 60675 | 495.00 | 24 |
| | SM65-63 | 25' | 60681 | 128.75 | 6 |
| | .063" Gauge | 50' | 60683 | 253.00 | 12 |
| | Full Complement | 100' | 60685 | 495.00 | 24 |
| | SM65 Skiptooth | 25' | 60696 | 128.75 | 6 |
| | (.058" Gauge) | 50' | 60698 | 253.00 | 12 |
| | | 100' | 60700 | 495.00 | 24 |
| | SM65 Skiptooth | 25' | 60689 | 128.75 | 6 |
| | (.063" Gauge) | 50' | 60691 | 253.00 | 12 |
| | | 100' | 60693 | 495.00 | 24 |
| | SM65 Semi-Skiptooth | 25' | 60710 | 128.75 | 6 |
| | (.058" Gauge) | 50' | 60712 | 253.00 | 12 |
| | | 100' | 60714 | 495.00 | 24 |
| | SM65 Semi-Skiptooth | 25' | 60703 | 128.75 | 6 |
| | (.063" Gauge) | 50' | 60705 | 253.00 | 12 |
| | | 100' | 60707 | 495.00 | 24 |
| | SM8 | 25' | 60582 | 128.75 | 6 |
| | (.058" Gauge) | 50' | 60584 | 253.00 | 12 |
| | | 100' | 60586 | 495.00 | 24 |
| | SM8-63 | 25' | 60592 | 128.75 | 6 |
| | (.063" Gauge) | 50' | 60594 | 253.00 | 12 |
| | | 100' | 60596 | 495.00 | 24 |
| SM9 | 25' | 60527 | 128.75 | 6 | |
| (.058" Gauge) | 50' | 60529 | 253.00 | 12 | |
| | 100' | 60531 | 495.00 | 24 | |
| SM9-63 | 25' | 60535 | 128.75 | 6 | |
| .063" Gauge | 50' | 60537 | 253.00 | 12 | |
| | 100' | 60539 | 495.00 | 24 | |
| SM-7 | 25' | 60850 | 128.75 | 6 | |
| (.058" Gauge) | 50' | 60718 | 253.00 | 12 | |
| | 100' | 60720 | 495.00 | 24 | |
| SM7-63 | 25' | 60788 | 128.75 | 6 | |
| (.063" Gauge) | 50' | 60790 | 253.00 | 12 | |
| | 100' | 60792 | 495.00 | 24 | |
| SL CHAIN | SL65 | 25' | 60815 | 128.75 | 6 |
| | (.058 Gauge) | 50' | 60817 | 253.00 | 12 |
| | | 100' | 60819 | 495.00 | 24 |
| | SL65-63 | 25' | 61010 | 128.75 | 6 |
| | (.063 Gauge) | 50' | 61012 | 253.00 | 12 |
| | | 100' | 61014 | 495.00 | 24 |
| | SL7 | 25' | 60861 | 128.75 | 6 |
| | (.058 Gauge) | 50' | 60863 | 253.00 | 12 |
| | | 100' | 60865 | 495.00 | 24 |
| | SL7-63 | 25' | 60852 | 128.75 | 6 |
| | (.063 Gauge) | 50' | 60854 | 253.00 | 12 |
| | | 100' | 60856 | 495.00 | 24 |
| | SL8 | 25' | 60881 | 128.75 | 6 |
| | (.058 Gauge) | 50' | 60882 | 253.00 | 12 |
| | | 100' | 60883 | 495.00 | 24 |
| SL8-63 | 25' | 60867 | 128.75 | 6 | |
| (.063" Gauge) | 50' | 60868 | 253.00 | 12 | |
| | 100' | 60869 | 495.00 | 24 | |
| "F" and "J" CHAIN | "F" | 50' | 24756 | 253.00 | 7 |
| | (.074" Gauge) | 100' | 24758 | 495.00 | 14 |
| | "J" | 50' | 24761 | 253.00 | 7 |
| | (.074" Gauge) | 100' | 24762 | 495.00 | 14 |


*Manufacturers suggested list price

Prices and specifications subject to change without notice.

Prices F.O.B. Distributor's Warehouse

SUGGESTED LIST PRICES FOR CUT LENGTHS

The "Price per inch" of Super-Mac Chain is 43¢. To find the suggested list price of a length of chain cut from a reel, measure the length of the chain or count the number of center links, then refer to this list.

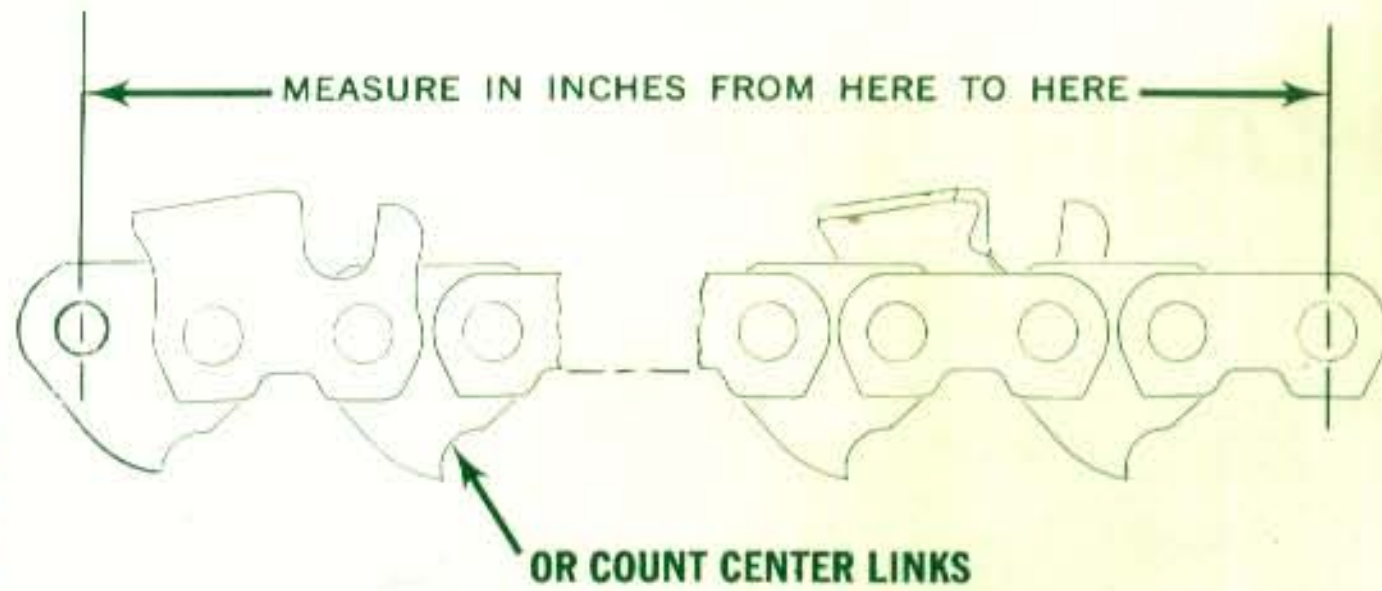


| Chain Length in inches | Number of Center Links | | | | Price* |
|------------------------|------------------------|-----------------|----------------|------------|--------|
| | SM-65 SL-65 404" | SM-7 SL-7 7/16" | SM-8 SL-8 1/2" | SM-9 9/16" | |
| 33 | 40 | 37 | 32 | 29 | 14.19 |
| 34 | 41 | 38 | 33 | 30 | 14.62 |
| 35 | 43 | 39 | 34 | 31 | 15.05 |
| 36 | 44 | 41 | 35 | 31 | 15.48 |
| 37 | 45 | 42 | 36 | 32 | 15.91 |
| 38 | 46 | 43 | 37 | 33 | 16.34 |
| 39 | 48 | 44 | 38 | 34 | 16.77 |
| 40 | 49 | 45 | 39 | 35 | 17.20 |
| 41 | 50 | 46 | 40 | 36 | 17.63 |
| 42 | 51 | 47 | 41 | 37 | 18.06 |
| 43 | 53 | 49 | 42 | 38 | 18.49 |
| 44 | 54 | 50 | 43 | 39 | 18.92 |
| 45 | 55 | 51 | 44 | 39 | 19.35 |
| 46 | 56 | 52 | 45 | 40 | 19.78 |
| 47 | 58 | 53 | 46 | 41 | 20.21 |
| 48 | 59 | 54 | 47 | 42 | 20.64 |
| 49 | 60 | 55 | 48 | 43 | 21.07 |
| 50 | 61 | 57 | 49 | 44 | 21.50 |
| 51 | 63 | 58 | 50 | 45 | 21.93 |
| 52 | 64 | 59 | 51 | 46 | 22.36 |
| 53 | 65 | 60 | 52 | 47 | 22.79 |
| 54 | 66 | 61 | 53 | 47 | 23.22 |
| 55 | 67 | 62 | 54 | 48 | 23.65 |
| 56 | 69 | 63 | 55 | 49 | 24.08 |
| 57 | 70 | 65 | 56 | 50 | 24.51 |
| 58 | 71 | 66 | 57 | 51 | 24.94 |
| 59 | 72 | 67 | 58 | 52 | 25.37 |
| 60 | 74 | 68 | 59 | 53 | 25.80 |
| 61 | 75 | 69 | 60 | 54 | 26.23 |
| 62 | 76 | 70 | 61 | 55 | 26.66 |
| 63 | 77 | 71 | 62 | 55 | 27.09 |
| 64 | 79 | 73 | 63 | 56 | 27.52 |
| 65 | 80 | 74 | 64 | 57 | 27.95 |
| 66 | 81 | 75 | 65 | 58 | 28.38 |
| 67 | 82 | 76 | 66 | 59 | 28.81 |
| 68 | 84 | 77 | 67 | 60 | 29.24 |
| 69 | 85 | 78 | 68 | 61 | 29.67 |
| 70 | 86 | 79 | 69 | 62 | 30.10 |
| 71 | 87 | 81 | 70 | 63 | 30.53 |
| 72 | 89 | 82 | 71 | 63 | 30.96 |
| 73 | 90 | 83 | 72 | 64 | 31.39 |
| 74 | 91 | 84 | 73 | 65 | 31.82 |
| 75 | 92 | 85 | 74 | 66 | 32.25 |
| 76 | 94 | 86 | 75 | 67 | 32.68 |
| 77 | 95 | 87 | 76 | 68 | 33.11 |
| 78 | 96 | 89 | 77 | 69 | 33.54 |
| 79 | 97 | 90 | 78 | 70 | 33.97 |
| 80 | 98 | 91 | 79 | 71 | 34.40 |
| 81 | 100 | 92 | 80 | 71 | 34.83 |
| 82 | 101 | 93 | 81 | 72 | 35.26 |
| 83 | 102 | 94 | 82 | 73 | 35.69 |
| 84 | 103 | 95 | 83 | 74 | 36.12 |
| 85 | 105 | 97 | 84 | 75 | 36.55 |
| 86 | 106 | 98 | 85 | 76 | 36.98 |
| 87 | 107 | 99 | 86 | 77 | 37.41 |
| 88 | 108 | 100 | 87 | 78 | 37.84 |

| Chain Length in inches | Number of Center Links | | | | Price* |
|------------------------|------------------------|-----------------|----------------|------------|--------|
| | SM-65 SL-65 404" | SM-7 SL-7 7/16" | SM-8 SL-8 1/2" | SM-9 9/16" | |
| 89 | 110 | 101 | 88 | 79 | 38.27 |
| 90 | 111 | 102 | 89 | 79 | 38.70 |
| 91 | 112 | 103 | 90 | 80 | 39.13 |
| 92 | 113 | 105 | 91 | 81 | 39.56 |
| 93 | 114 | 106 | 92 | 82 | 39.99 |
| 94 | 116 | 107 | 93 | 83 | 40.42 |
| 95 | 117 | 108 | 94 | 84 | 40.85 |
| 96 | 118 | 109 | 95 | 85 | 41.28 |
| 97 | 119 | 110 | 96 | 86 | 41.71 |
| 98 | 121 | 111 | 97 | 87 | 42.14 |
| 99 | 122 | 113 | 98 | 87 | 42.57 |
| 100 | 123 | 114 | 99 | 88 | 43.00 |
| 101 | 124 | 115 | 100 | 89 | 43.43 |
| 102 | 126 | 116 | 101 | 90 | 43.86 |
| 103 | 127 | 117 | 102 | 91 | 44.29 |
| 104 | 128 | 118 | 103 | 92 | 44.72 |
| 105 | 129 | 119 | 104 | 93 | 45.15 |
| 106 | 131 | 121 | 105 | 94 | 45.58 |
| 107 | 132 | 122 | 106 | 95 | 46.01 |
| 108 | 133 | 123 | 107 | 95 | 46.44 |
| 109 | 134 | 124 | 108 | 96 | 46.87 |
| 110 | 136 | 125 | 109 | 97 | 47.30 |
| 111 | 137 | 126 | 110 | 98 | 47.73 |
| 112 | 138 | 127 | 111 | 99 | 48.16 |
| 113 | 139 | 129 | 112 | 100 | 48.59 |
| 114 | 140 | 130 | 113 | 101 | 49.02 |
| 115 | 142 | 131 | 114 | 102 | 49.45 |
| 116 | 143 | 132 | 115 | 103 | 49.88 |
| 117 | 144 | 133 | 116 | 103 | 50.31 |
| 118 | 145 | 134 | 117 | 104 | 50.74 |
| 119 | 147 | 135 | 118 | 105 | 51.17 |
| 120 | 148 | 137 | 119 | 106 | 51.60 |
| 121 | 149 | 138 | 120 | 107 | 52.03 |
| 122 | 150 | 139 | 121 | 108 | 52.46 |
| 123 | 152 | 140 | 122 | 109 | 52.89 |
| 124 | 153 | 141 | 123 | 110 | 53.32 |
| 125 | 154 | 142 | 124 | 111 | 53.75 |
| 126 | 155 | 143 | 125 | 111 | 54.18 |
| 127 | 157 | 145 | 126 | 112 | 54.61 |
| 128 | 158 | 146 | 127 | 113 | 55.04 |
| 129 | 159 | 147 | 128 | 114 | 55.47 |
| 130 | 160 | 148 | 129 | 115 | 55.90 |
| 131 | 162 | 149 | 130 | 116 | 56.33 |
| 132 | 163 | 150 | 131 | 117 | 56.76 |
| 133 | 164 | 151 | 132 | 118 | 57.19 |
| 134 | 165 | 153 | 133 | 119 | 57.62 |
| 135 | 166 | 154 | 134 | 119 | 58.05 |
| 136 | 168 | 155 | 135 | 120 | 58.48 |
| 137 | 169 | 156 | 136 | 121 | 58.91 |
| 138 | 170 | 157 | 137 | 122 | 59.34 |
| 139 | 171 | 158 | 138 | 123 | 59.77 |
| 140 | 173 | 159 | 139 | 124 | 60.20 |
| 141 | 174 | 161 | 140 | 125 | 60.63 |
| 142 | 175 | 162 | 141 | 126 | 61.06 |
| 143 | 176 | 163 | 142 | 127 | 61.49 |
| 144 | 178 | 164 | 143 | 127 | 61.92 |

*Manufacturers suggested list price

CHAIN TOOLS and ACCESSORIES

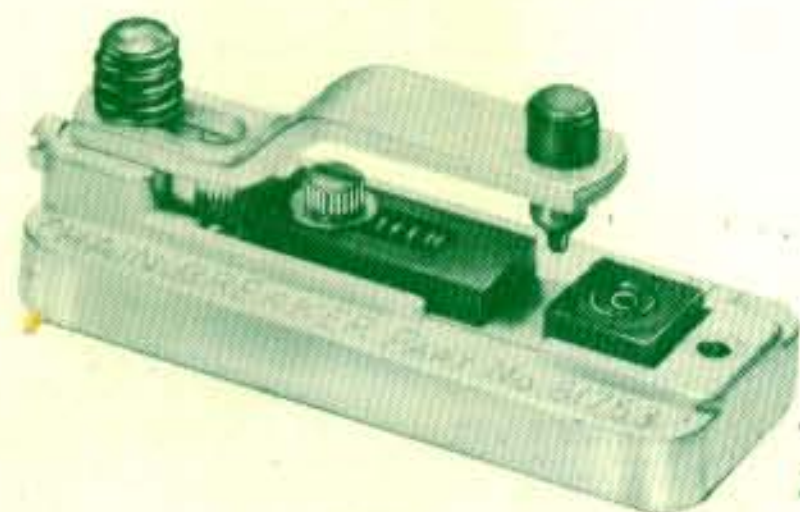

(Skin Packed)

| DESCRIPTION | McCULLOCH PARTS NO. | PRICE* |
|------------------------------------|---------------------|---------------|
| 'BREAK-ALL' CHAIN BREAKER | 61753 | \$ 3.95 |
| Chassis (Base & Punch-Arm) | 61841 | 1.90 |
| Screw, 8-32 x 1" | 100717 | .10 |
| Nut, 8-32 | 100251 | Standard Part |
| Fixed Anvil | 61840 | .60 |
| Roll Pin | 105657 | .10 |
| Movable Anvil | 61842 | .45 |
| Spring, Movable Anvil | 61838 | .10 |
| Screw, self-threading, 8-32 x 5/8" | 101449 | Standard Part |
| Punch | 61839 | .60 |
| Retaining Ring | 110277 | .10 |



(Skin Packed)

The McCulloch file guide is designed for use with a 3/16" 7/32" or 1/4" file. Maintains accurate positioning of the file for fast, precision filing.


| | | |
|----------------------------|-------|--------|
| FILE GUIDE | 60950 | \$3.95 |
| (Complete With 7/32" File) | | |



(Skin Packed)

Sets depth gauge accurately to insure proper cutting and better use of saw power. Each tool has four separate depth gauge settings in .005" increments.

| DEPTH GAUGE TOOL | | |
|------------------|-------|--------|
| .025 - .040 | 56218 | \$1.30 |
| .045 - .060 | 56241 | 1.30 |

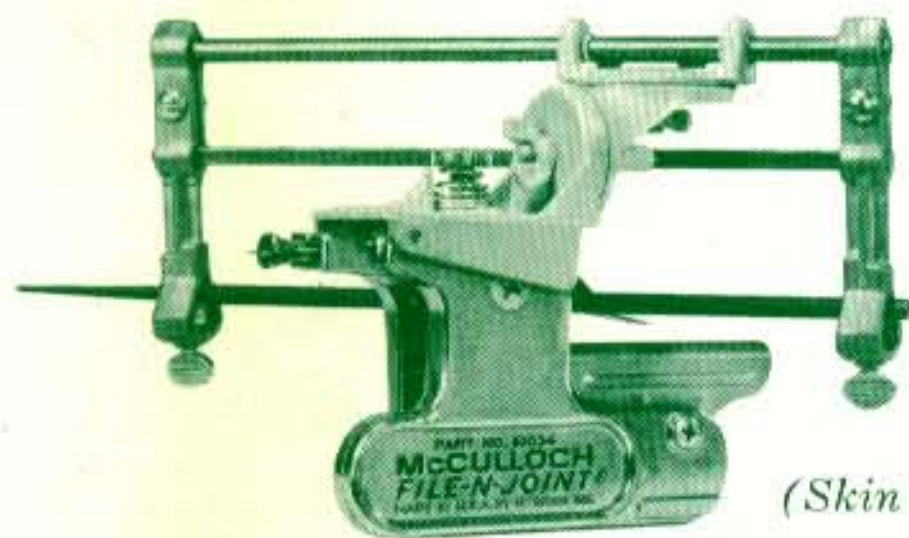

(Skin Packed)

| | | |
|--------------|-------|---------|
| FILE-N-JOINT | 61034 | \$15.85 |
|--------------|-------|---------|

Top quality steel for precision filing.



(Ask your distributor about Free Plastic File Envelopes.)

| McCULLOCH FILES (One Dozen) | | |
|-----------------------------|-------|-------------|
| 3/16" | 56697 | Prices |
| 7/32" | 56698 | furnished |
| 1/4" | 56699 | by your |
| 9/32" | 56928 | Distributor |
| 8" flat | 56701 | |




Made of Heavy-Duty polyvinylchloride plastic that is resistant to oil, fuel, heat or cold. It fits over the end of all bars providing protection to both chain and user.

| | | |
|-----------|-------|--------|
| BAR GUARD | 56927 | \$2.98 |
|-----------|-------|--------|



| DESCRIPTION | McCULLOCH PARTS NO. | PRICE* |
|--------------------|---------------------|---------|
| SHOP CHAIN BREAKER | 56800B | \$16.50 |
| Base Assembly | 56805 | 12.00 |
| Bushing | 56801 | 2.00 |
| Screw | 102035 | .03 |
| Anvil | 56803B | 3.50 |
| Punch | 56802 | 1.50 |

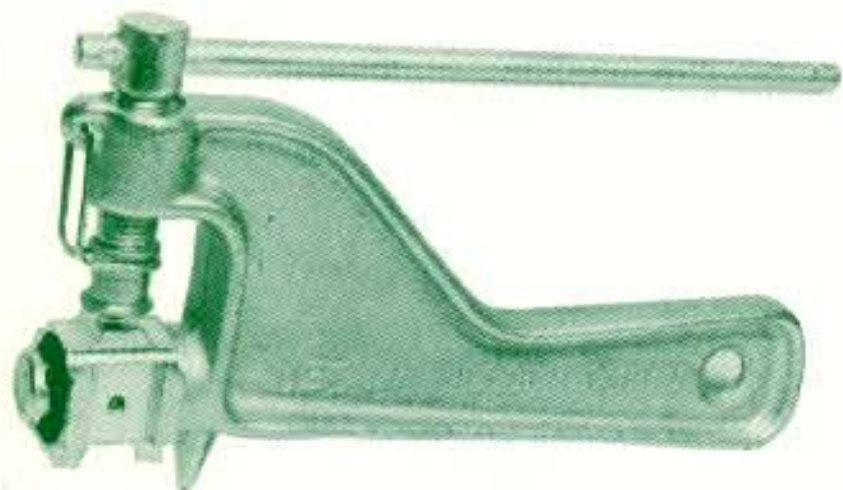

This compact, pocket size tool replaces hammer, punches and anvils for speedy on-the-spot maintenance.


| | | |
|-------------------------|--------|--------|
| CHAIN BREAKER - SPINNER | 56224A | \$7.95 |
| Frame Assembly | 56225 | 5.20 |
| Spring | 56228 | .40 |
| Retaining Spring | 56235 | .55 |
| Anvil | 56229A | 3.95 |
| Screw Assembly | 56230A | 3.30 |
| Punch | 56234 | .85 |



(Skin Packed)


A quick efficient field chain repair tool designed for use on all McCulloch Chain.

| | | |
|----------------------|--------|--------|
| POCKET CHAIN BREAKER | 60973 | \$4.50 |
| Anvil | 56803B | 3.50 |
| Punch | 60783 | 1.00 |

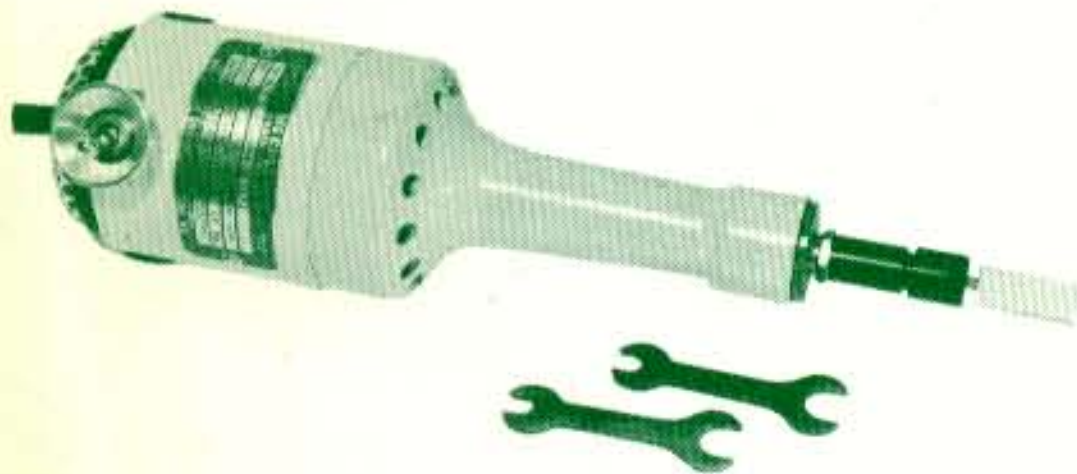

Sharpens a razor fine edge on cutter teeth in seconds. Lightweight construction. Comes with 1/8" chuck, wrenches and 8' rubberized cord.

ELECTRIC CHAIN GRINDER 101259 \$37.00

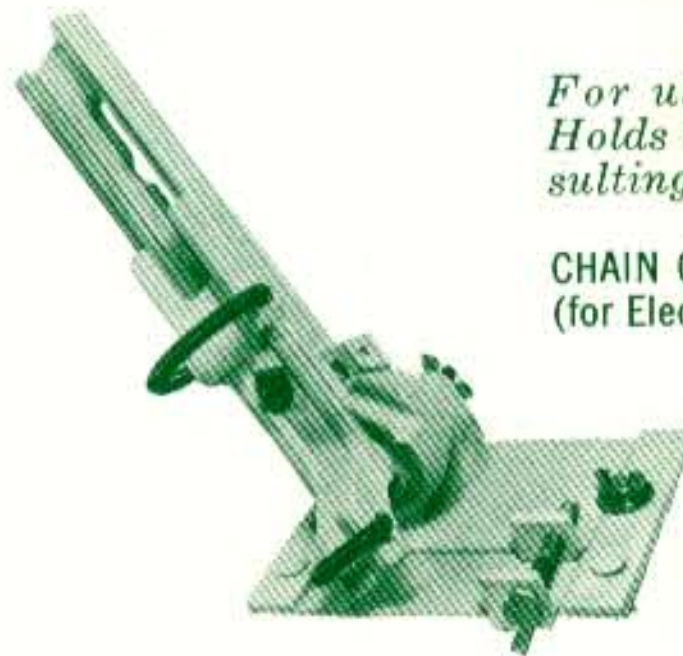

For use with the Electric Grinder. Holds the grinder firmly in position resulting in precision tooth sharpening.

CHAIN GRINDER GUIDE 102094 \$25.00
(for Electric Grinder)



For use with the Electric Grinder, these stones are made of top quality materials and are to precise dimensions.

| GRINDER STONES (for Electric Grinder) | | | | |
|---------------------------------------|--------|--------|-----------|---------|
| | | Each | Box of 25 | |
| 7/32" | 104172 | \$.75 | 104172x | \$18.00 |
| for SM-65 SM-7, SL-65, SL-7 | | | | |
| 1/4" | 103029 | .75 | 103029x | 18.00 |
| for SM-8, SL-8, SM-9 | | | | |
| 9/32" | 103028 | .75 | 103028x | 18.00 |
| 3/8" | 101307 | .75 | 101307x | 18.00 |
| for "F", "J" | | | | |

McCULLOCH OIL - PAINT - SAFETY HATS



| Accessory | Part Number | Suggested Can Price | Part Number | Suggested Case Price |
|-------------------------------|-------------|---------------------|-------------|----------------------|
| McCULLOCH GEAR OIL (SAE 140) | 19342 | \$.45 | 104347 | \$10.10 (24 cans) |
| McCULLOCH PAINT Yellow 12 oz. | 102449 | 1.65 | 102464 | 18.90 (12 cans) |
| Black 12 oz. | 103503 | 2.10 | 103400 | 25.00 (12 cans) |
| McCULLOCH OIL 12 oz. can | 56404 | .28 | 56405 | 13.40 (48 cans) |
| 1 qt. can | 56409 | .58 | 56410 | 13.90 (24 cans) |
| 6 Pack (12 oz. cans) | 56507 | 1.68 (6 pack) | | |



CAP



HAT

| Description | Style No. | |
|--|------------|--------------------------------------|
| HATS | | |
| Fiberglass | No. 8M | |
| Phenolic | No. 15M | |
| Dielectric (insulating) | No. 23M | |
| Aluminum | No. 33M | |
| CAPS | | |
| Fiberglass | No. 9M | Prices furnished by your Distributor |
| Phenolic | No. 16M | |
| Dielectric (insulating) | No. 22M | |
| Aluminum | No. 32M | |
| WINTERLINER (Order: SMALL or LARGE) | | |
| Twill with flannelette lining | No. WL7M | |
| CHINSTRAPS | | |
| Dielectric (for Hat No. 23M, Cap No. 22M) | No. HC252M | |
| Standard (for all other Hats and Caps) | No. HC217M | |
| GEODETC SUSPENSIONS ONLY | | |
| Standard with leatherette sweatband | No. HC225M | |
| Standard with genuine leather sweatband | No. HC226M | |
| Dielectric with genuine leather sweatband* | No. HC247M | |
| Dielectric with leatherette sweatband* | No. HC245M | |

All hats and caps are shipped complete with geodetic suspension and leatherette sweatband.

LEADERSHIP THRU CREATIVE ENGINEERING

McCULLOCH

6101 West Century Boulevard, Los Angeles, California 90045

THERE'S A McCULLOCH SAW CHAIN FOR EVERY CHAIN SAW . . . EVERY CUTTING JOB!

