


McCULLOCH
Saw Chain
Catalog
for
Competitive
Chain Saws

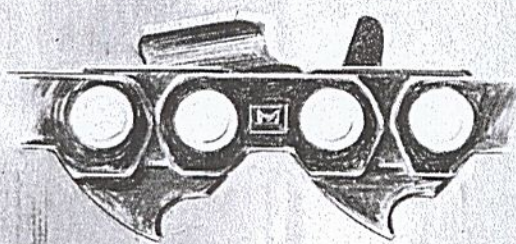

SUPER-MAC

FEATURING

THE
NEW
SUPER-TOUGH
SAW
CHAIN

6101 West Century Blvd.

Los Angeles 45, Calif.

McCULLOCH CORPORATION



COMPETITIVE CHAIN CONVERSION CHART

This conversion chart indicates the recommended McCulloch chain to install on a saw when replacing chain of another brand. The brief explanation under each McCulloch chain type will act as a guide in selecting the proper chain for either direct drive

or gear drive saws.†Always make certain the proper gauge chain is selected so it will fit the groove of the bar properly. Also make certain to install a new sprocket of the proper type to assure long life of the new McCulloch chain. †See page 16.

McCULLOCH			... REPLACES THESE BRANDS						
CHAIN PITCH	CHAIN GAUGE	McCULLOCH CHAIN TYPE	ATKINS	BURNS		OREGON	PIONEER	REMINGTON	SUPER JET
				Chipper	Centerline				
.404"	.058	SM-65	458	4A-1	4B-1	51AC3 58AC	—	408	40-2
.404"	.063	SM-65-63	463	4A-2	4B-1	52AC3 59AC	CO2	403	40-3
7/16"	.058	SM-7	758 758C	7A-1	7B-1	61AC3 68C	DO1	438 P438	43-1
7/16"	.063	SM-7-63	763 763C	7A-2	7B-2	62AC3 69C	DO2	433 P433	43-2
1/2"	.058	SM-8	158 158C	5A-1	5B-1	9AC 31C3	FO1	508	50-50 50-54
1/2"	.063	SM-8-63	163 163C	5A-2	5B-2	10AC 32C3	FO2	503	50-51 50-55
9/16"	.058	SM-9	958 958C	9A-1	—	5AC	—	—	56-4
9/16"	.063	SM-9-63	963 963C	9A-2	—	4C	—	—	56-5

specifications subject to change without notice.



McCULLOCH Saw Chain Catalog for Competitive Chain Saws

HOW TO USE THIS CATALOG

The information in this price list concerning bar lengths and required chain lengths is based on the latest information available and is accurate to the best of our knowledge.


The suggested list price is for either endless chain or master link chain. If the user does not specify endless chain, it is usually best to make up the chain with master links, for ease of installation and removal. If two right-hand cutters (or two left-hand cutters) come at each end, when making up endless chain, remove the right-hand cutter (or left-hand cutter) at the forward end of the chain and install a side link in its place before connecting the two ends together. When one cutter comes right next to another cutter on the same side of the chain without a side link between them, the front cutter will not be able to cut effectively.

Chain lengths in this list are measured to the nearest inch, from the rivet hole of the center link at one end of the chain to the rivet hole of the side link or cutter at the other end.

Brands of chain saws are listed alphabetically. To use this price list, turn to the page on which the brand-name appears. Under this name are listed the saw models on which McCulloch chain can be used. For example, if you want to find the correct chain for a Homelite EZ-6, with a $\frac{3}{16}$ " Pitch sprocket and a 25" Bar, look under the name "Homelite" for the model EZ-6. Then locate the **Bar Cutting Capacity** (25") and read across for the **Chain Length** (66-67"), the **Number of Center Links** (76), and the **Suggested List Price** (\$28.81). If a number appears under the **McCulloch Part Number** column, for any given saw model, then cut length packaged chain is available from the factory for that model. Packaged chain comes with master links installed.

HOW TO CUT CHAIN FROM REELS

To cut chain from reels, find the number of center links required for a given model, count off this number of center links on the reel chain, and break the chain at that point.

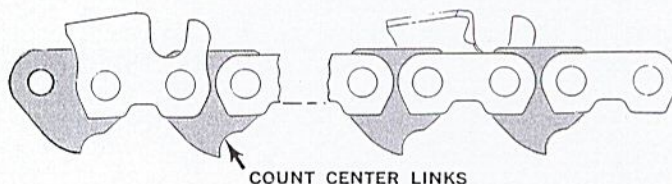

Each reel contains a number of master links in an envelope. You can install a master link if your customer wants his chain to be joined together with a master pin. The master pin hole (the larger of the two holes in each master link) goes toward the REAR of the chain to prevent damage to the master pin hole by the sprocket teeth.


To make an "endless" chain, join the ends together with a pair of side links.

Provided with each reel are a number of repair kits, one of which should be supplied to the customer with each cut length. The kit includes one master pin for joining chains using master links.

A McCulloch Shop Chain Breaker is a handy tool to have for use in cutting reel chain, and quickly pays for itself.

Cutting chain from reels is easy and has many advantages. You can always supply the right length of chain for your customers, and you'll actually make more money.

Prices effective
JULY 1, 1963

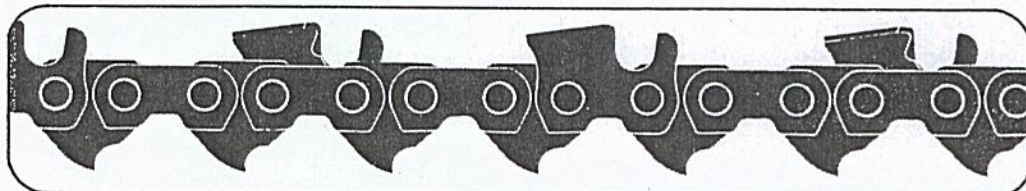

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
BARKER SAW CO.							
DIRECT DRIVE	SM-7 or SL-7 (7/16")	.063	16"	44-45"	51	—	\$19.35
MODELS C-4, C-6, C-25,			20"	52-53"	60	—	22.79
SPORTSMAN C-30, C-40			25"	64-65"	74	—	27.95
C-70, C-80, H-77, H-88,	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	19.35
H-41, H-61, H-71, H-91			20"	52-53"	52	—	22.79
KLIPPER SUPER 44,			25"	64-65"	64	—	27.95
SUPER 55, SUPER 66	SM-65 or SL-65 (.404")	.063	16"	44-45"	55	—	19.35
(Same)			20"	52-53"	65	—	22.79
			25"	64-65"	80	—	27.95
BAYSTATE							
(SEE FLEETWOOD)							
BEAIRD-POULAN							
(SEE POULAN)							

**Manufacturers Suggested List Price. Specifications subject to change without notice.

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
BOLENS							
GEAR DRIVE MODELS 3700, 5200, 5600, 5700	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	\$19.35
			20"	52-53"	52	—	22.79
			25"	64-65"	64	—	27.95
			31"	76-77"	76	—	33.11
			37"	88-89"	88	—	38.27
GEAR DRIVE MODELS 3600; DIRECT DRIVE THRIFTY 3000, 3400, 3500, 3800, 3900, 3910, 5500, 3010, 3915, 3014, SWIFTY 3011	SM-7 or SL-7' (7/16")	.063	14"	41-42"	47	—	18.06
			16"	44-45"	51	—	19.35
			20"	52-53"	60	—	22.79
			24"	60-61"	69	—	26.23
			30"	72-73"	83	—	31.39
(Same)	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	19.35
			20"	52-53"	52	—	22.79
			24"	60-61"	60	—	26.23
			30"	72-73"	72	—	31.39
(Same)	SM-65 or SL-65 (.404")	.063	14"	41-42"	51	—	18.06
			16"	44-45"	55	—	19.35
			20"	52-53"	65	—	22.79
			24"	60-61"	75	—	26.23
			30"	72-73"	90	—	31.39
BURNS TOOL CO. (SEE WHITEHEAD)							
C-B TOOL CO. (SEE LANCASTER)							
CLINTON							
DIRECT DRIVE MODELS D2, D3, D4, WD45, WD55, ED45, ED55 (SAND CAST STRUT) D-35, D-55	SM-8 or SL-8 (1/2")	.058	16"	44-45"	44	60554 (SM)	18.90
			16"†	48-49"	48	60874 (SL)	18.90
			20"	52-53"	52	—	21.07
			20"†	56-57"	56	—	22.79
			26"	64-65"	64	60568 (SM)	24.51
			26"†	68-69"	68	60572 (SM)	28.10
							29.40
(Same)	SM-7 or SL-7 (7/16")	.058	16"	44-45"	51	—	19.35
			16"†	48-49"	55	—	21.07
			20"	52-53"	60	60842 (SM)	22.75
			20"†	56-57"	64	60998 (SL)	22.75
			26"	64-65"	74	—	24.51
			26"†	68-69"	78	—	27.95
							29.67
MODELS D40, D50, HANDY D55, D60, D65 (DIE CAST STRUT)	SM-8 or SL-8 (1/2")	.058	14"	42-43"	42	—	18.49
			16"	46-47"	46	—	20.21
			16"†	50-51"	50	—	21.93
			20"	54-55"	54	—	23.65
			20"†	58-59"	58	—	25.37
			26"	66-67"	66	—	28.81
			26"†	70-71"	70	—	30.53
(Same)	SM-7 or SL-7 (7/16")	.058	16"	45-46"	52	—	19.78
			16"†	50-51"	58	—	21.93
			20"	53-54"	61	—	23.22
			20"†	58-59"	67	—	25.37
			26"	65-66"	75	—	28.38
			26"†	70-71"	80	—	30.53
(Same)	SM-65 or SL-65 (.404")	.058	16"	44-45"	55	—	19.35
			16"†	49-50"	61	—	21.50
			20"	52-53"	65	60663 (SM)	22.75
			20"†	57-58"	71	60807 (SL)	22.75
			26"	65-66"	81	—	24.94
			26"†	69-70"	86	—	28.38
							30.10

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

† Roller Tip Guide Bar

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **			
CLINTON (Continued)										
GEAR DRIVE MODELS 3A, 4A, 5A, 323, 323A, 424, 525, 577, 577-1, 577-1-H, R55-G1, R55 Super, R60-G1, R65-G1, R65 Super	SM-8 or SL-8 (1/2")	.058	16"	44-45"	44	60554 (SM)	\$ 18.90			
						60874 (SL)	18.90			
			16"†	49-50"	49	60560 (SM)	19.50			
						60875 (SL)	19.50			
			20"	52-53"	52	—	22.79			
			20"†	57-58"	57	—	24.94			
			26"	65-66"	65	—	28.38			
			26"†	69-70"	69	—	30.10			
			30"	76-77"	76	60576 (SM)	32.85			
						60880 (SL)	32.85			
			30"†	74-75"	74	—	32.25			
			36"	88-89"	88	—	38.27			
			36"†	86-87"	86	—	37.41			
			42"	100-101"	100	—	43.43			
			42"†	99-100"	99	—	43.00			
			16"*	61-62"	61	—	26.66			
(Same)	SM-9 (9/16")	.058	16"	44-45"	40	—	19.78			
			16"†	49-50"	44	—	21.50			
			20"	52-53"	47	60505 (SM)	22.79			
			20"†	57-58"	51	—	24.94			
			26"	65-66"	58	60511 (SM)	28.38			
			26"†	69-70"	62	60513 (SM)	30.10			
			30"	76-77"	68	60515 (SM)	33.11			
			30"†	74-75"	66	—	32.25			
			36"	88-89"	79	60519 (SM)	38.27			
			36"†	86-87"	77	—	37.41			
			42"	100-101"	89	—	43.43			
			42"†	99-100"	88	—	43.00			
			16"*	61-62	55	—	27.09			
			DAVID BRADLEY (Sears)							
			DIRECT DRIVE MODELS 917.60002, 917.60004, 917.60007, 917.60008, 917.600014 SUPER 3, 5D, D21	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	19.35
						20"	52-53"	52	—	22.79
MODELS 917.60011, 917.60017, UD4, 5D19, 6D20, 8D22	SM-7 or SL-7 (7/16")	.063	12"	38-39"	44	—	16.77			
			16"	46-47"	53	—	20.21			
			19"	52-53"	60	—	22.79			
			24"	63-64"	72	—	27.52			
GEAR DRIVE MODELS 917.60005, 917.60009, 917.60010, 917.60013, 917.60015, 917.60016, 4G24, 5G, 5G21, 6G22, 8G24, UG4	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	19.35			
			20"	52-53"	52	—	22.79			
			26"	64-65"	64	—	27.95			
			32"	76-77"	76	—	28.81			
			Bow*	64-65"	64	—	27.95			
MODELS 917.60001, 917.60003, 917.60006, 355.83130, 31, 32	SM-8 or SL-8 (1/2")	.058	20"	53-54"	53	60564 (SM)	22.75			
			20"	52-53"	52	60876 (SL)	22.75			
			26"	64-65"	64	60568 (SM)	28.10			
DISSTON										
MODELS DO-100, DO-101	SM-9 (9/16")	.063	20"	58-59"	52	—	25.37			
			26"	67-68"	60	—	29.24			
			32"	81-82"	72	—	35.26			
			36"	86-87"	77	—	37.41			
			40"	99-100"	88	—	43.00			
			15"*	63-64"	56	—	27.52			
MODEL DA-211 (KIEKHAEFFER KA-211)	SM-9 (9/16")	.063	2'	66-67"	59	—	28.81			
			3'	88-89"	79	—	38.27			
			42"	109-110"	97	—	47.30			
			4'	113-114"	101	—	49.02			
			5'	137-138"	122	—	59.34			
			6'	162-163"	144	—	70.09			
			7'	186-187"	166	—	80.41			
			25"*	103-104"	92	—	44.72			

**Manufacturers Suggested List Price.
Specifications subject to change without notice.

* Bow
† Roller Tip Guide Bar

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
ECLIPSE LAWN MOWER CO.							
DIRECT DRIVE MODELS WASP 700, 800, 900, 1100	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	\$ 19.35
			20"	52-53"	52	—	22.79
			24"	60-61"	60	—	26.23
			26"	64-65"	64	—	27.95
			30"	72-73"	72	—	31.39
(Same)	SM-8 or SL-8 (1/2")	.058	14"*	60-61"	60	—	26.23
(Same)	SM-7 or SL-7 (7/16")	.063	16"	44-45"	51	—	19.35
			20"	52-53"	60	—	22.79
			24"	60-61"	69	—	26.23
			26"	64-65"	74	—	27.95
			30"	72-73"	83	—	31.39
(Same)	SM-7 or SL-7 (7/16")	.058	14"*	60-61"	69	—	26.23
FLEETWOOD							
DIRECT DRIVE MODELS 7400, 7500	SM-7 or SL-7 (7/16")	.063	14"	41-42"	47	—	18.06
			16"	44-45"	51	—	19.35
			20"	52-53"	60	—	22.79
			24"	60-61"	69	—	26.23
			30"	72-73"	83	—	31.39
GEAR DRIVE MODELS 200, 400	SM-8 or SL-8 (1/2")	.058	16"	46-47"	46	—	20.21
			20"	54-55"	54	—	23.65
			26"	66-67"	66	—	28.81
			30"	78-79"	78	—	33.97
			16"*	75-76"	75	60574 (SM)	32.85
(Same)	SM-8 or SL-8 (1/2")	.063	16"	46-47"	46	—	20.21
			20"	54-55"	54	—	23.65
			26"	66-67"	66	—	28.81
			30"	78-79"	78	—	33.97
			16"*	75-76"	75	—	32.68
MODELS 55, 55V	SM-8 or SL-8 (1/2")	.058	16"	44-45"	44	60554 (SM)	18.90
						60874 (SL)	18.90
			20"	52-53"	52	—	22.79
			26"	64-65"	64	60568 (SM)	28.10
			30"	76-77"	76	60576 (SM)	32.85
						60880 (SL)	32.85
HOFFCO							
SAWETTE MODELS K, KC, KC14	SM-8 or SL-8 (1/2")	.058	10"	32-33"	32	—	14.19
			14"	40-41"	40	—	17.63
MODELS GEAR DRIVE V3, 510, 645, 645WC, SUPER 645-B DIRECT DRIVE 88, SUPER 88	SM-8 or SL-8 (1/2")	.058	14"	40-41"	40	—	17.63
			16"	44-45"	44	60554 (SM)	18.90
						60874 (SL)	18.90
			18"	48-49"	48	—	21.07
			20"	52-53"	52	—	22.79
			24"	64-65"	64	60568 (SM)	28.10
			30"	72-73"	72	—	31.39
			30" Sp.	76-77"	76	60576 (SM)	32.85
						60880 (SL)	32.85
			36"	88-89"	88	—	38.27
			42"	100-101"	100	—	43.43
			50"	116-117"	116	—	50.31
			15"*	64-65"	64	—	28.10
			18"*	72-73"	72	—	31.39
DIRECT DRIVE MODELS 88, SUPER 88	SM-7 or SL-7 (7/16")	.058	14"	40-41"	46	—	17.63
			16"	44-45"	51	—	19.35
			18"	48-49"	55	—	21.07
			20"	52-53"	60	60842 (SM)	22.75
						60998 (SL)	22.75
			24"	64-65"	74	—	27.95
			30"	72-73"	83	—	31.39

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

* Bow

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
HOFFCO (Continued) DIRECT DRIVE MODELS 88, SUPER 88	SM-7 or SL-7 (7/16")	.058	30" Sp.	76-77"	87	60848 (SM)	\$ 32.85
			36"	88-89"	101	61004 (SL)	32.85
			15"*	64-65"	74	—	28.27
			18"*	72-73"	83	—	27.95
						—	31.39
HOMELITE DIRECT DRIVE MODELS EZ, EZ-6, ZIP, BUZ, 7-19, 7-19C, 9-23, 600D, 700D, 909D, 990D, 707D, 770D, C-5	SM-7 or SL-7 (7/16")	.063	12"	40-41"	46	—	17.63
			15"	46-47"	53	—	20.21
			17"	50-51"	58	—	21.93
			21"	57-58"	66	—	24.94
			25"	66-67"	76	—	28.81
			30"	77-78"	88	—	33.54
			35"	87-88"	100	—	37.84
			42"	99-100"	114	—	43.00
	(Same)	SM-65 or SL-65 (.404")	12"	40-41"	50	—	17.63
			15"	46-47"	57	—	20.21
			17"	50-51"	62	—	21.93
			21"	57-58"	71	—	24.94
			25"	65-66"	81	—	28.38
			30"	76-77"	95	—	33.11
			36"	87-88"	108	—	37.84
			42"	99-100"	123	—	43.00
	(Same)	SM-8 or SL-8 (1/2")	12"	40-41"	40	—	17.63
			15"	46-47"	46	—	20.21
			17"	50-51"	50	—	21.93
			21"	57-58"	57	—	24.94
			25"	66-67"	66	—	28.81
			30"	77-78"	77	—	33.54
			36"	87-88"	87	—	37.84
			42"	99-100"	99	—	43.00
GEAR DRIVE MODELS 17, 4-20, WIZ, 5-20, 6-22, 7-21, 7-21C, 9-26, 700G, 26LCS, 5-30, 7-29, 8-29, ECS-C, HCS-C SUPER WIZ, 900G, 990G, 707G, 770G	SM-8 or SL-8 (1/2")	.063	14"	40-41"	40	—	17.63
			18"	49-50"	49	—	21.50
			20"	52-53"	52	—	22.79
			23"	58-59"	58	—	25.37
			28"	67-68"	67	—	29.24
			33"	77-78"	77	—	33.54
			38"	87-88"	87	—	37.84
			44"	99-100"	99	—	43.00
			50"	113-114"	112	—	48.59
			60"	134-135"	133	—	57.62
			42"†	107-108"	106	—	46.01
	(Same)	SM-9 (9/16")	14"	40-41"	36	—	17.63
			18"	49-50"	44	—	21.50
			20"	52-53"	47	—	23.22
			23"	58-59"	52	—	25.37
			28"	67-68"	60	—	29.24
			33"	77-78"	69	—	33.54
			38"	87-88"	78	—	37.84
			44"	99-100"	88	—	43.00
(Same)	SM-7 or SL-7 (7/16")	.063	50"	112-113"	100	—	48.59
			60"	133-134"	119	—	57.62
			42"†	106-107"	95	—	46.01
			14"	40-41"	46	—	17.63
			18"	49-50"	56	—	21.50
			20"	52-53"	60	—	22.79
			23"	58-59"	67	—	25.37
I. E. L. (See Pioneer)			28"	67-68"	77	—	29.24
			33"	77-78"	88	—	33.54
			38"	87-88"	100	—	37.84

**Manufacturers Suggested List Price.
Specifications subject to change without notice.

* Bow
† Falling Bar

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
INDIAN (Almart)							
DIRECT DRIVE	SM-8 or SL-8	.063	16"	44-45"	44	—	\$ 19.35
MODELS THUNDERBOLT	(1/2")		20"	52-53"	52	—	22.79
351-D, 352-D, 651-D,			24"	64-65"	64	—	27.95
652, APACHE, SIOUX			30"	76-77"	76	—	33.11
			15"*	64-65"	64	—	27.95
(Same)	SM-7 or SL-7	.063	16"	44-45"	51	—	19.35
	(7/16")		20"	52-53"	60	—	22.79
			24"	64-65"	74	—	27.95
			30"	76-77"	88	—	33.54
			15"*	64-65"	74	—	27.95
KIEKHAEFER							
MODEL KA-211							
(SEE DISSTON DA-211)							
LAMB							
DIRECT DRIVE	SM-65 or SL-65	.058	16"	44-45"	55	—	19.35
MODEL SW	(.404")		20"	51-52"	64	—	22.36
			24"	57-58"	71	—	24.94
			28"	67-68"	83	—	29.24
			32"	79-80"	98	—	34.40
(Same)	SM-8 or SL-8	.058	16"	44-45"	44	60554 (SM)	18.90
	(1/2")		20"	51-52"	51	60874 (SL)	18.90
			24"	57-58"	57	60562 (SM)	22.75
			28"	67-68"	67	—	24.94
			32"	79-80"	79	—	29.24
						—	34.40
LANCASTER PUMP & MFG, CO., INC.							
DIRECT DRIVE MODELS	SM-8 or SL-8	.063	16"	44-45"	44	—	19.35
200, 200A, 400B, 400S, 450,	(1/2")		19"	52-53"	52	—	22.79
550			24"	64-65"	64	—	27.95
GEAR DRIVE MODELS			30"	76-77"	76	—	33.11
318, 318A, 318P, 324, 330,			36"	90-91"	90	—	39.13
336, 500, 600							
DIRECT DRIVE MODELS	SM-7 or SL-7	.063	16"	44-45"	51	—	19.35
325, 350, 350A, 450,	(7/16")		19"	52-53"	60	—	22.79
550, 650			24"	64-65"	74	—	27.95
			30"	75-76"	86	—	32.68
(Same)	SM-65 or SL-65	.063	16"	44-45"	55	—	19.35
	(.404")		19"	52-53"	65	—	22.79
			24"	64-65"	80	—	27.95
LEBANON METAL PRODUCTS							
GEAR DRIVE MODELS	SM-8 or SL-8	.058	18"	52-53"	52	—	22.79
200, 200-S, 175	(1/2")						
DIRECT DRIVE	SM-7 or SL-7	.058	19"	52-53"	60	60842 (SM)	22.75
MODEL 150-S	(7/16")					60998 (SL)	22.75
LOMBARD							
DIRECT DRIVE	SM-7 or SL-7	.063	16"	43-44"	50	—	18.92
MODELS DD2-D, DD2-F,	(7/16")		16"	44-45"	51	—	19.35
DD3-P, D-40, D-40-A, D-64,			20"	52-53"	60	—	22.79
D-65, 50, 52, 648, 650A,			24"	60-61"	69	—	26.23
68, 70			30"	77-78"	88	—	33.54
			36"	88-89"	101	—	38.27
			15"*	63-64"	72	—	27.52
(Same)	SM-8 or SL-8	.063	16"	43-44"	43	—	18.92
	(1/2")		16"	44-45"	44	—	19.35
			20"	52-53"	52	—	22.79
			24"	60-61"	60	—	26.23
			30"	77-78"	77	—	33.54
			36"	88-89"	88	—	38.27
			15"*	63-64"	63	—	27.52

**Manufacturers Suggested List Price.
Specifications subject to change without notice.

* Bow

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
LOMBARD (Continued)							
MODELS DD, DD-D, DD-F, 33	SM-8 or SL-8 (1/2")	.063	16" 20" 24"	44-45" 52-53" 60-61"	44 52 60	— — —	\$ 19.35 22.79 26.23
(Same)	SM-9 (9/16")	.063	16" 20" 24"	44-45" 52-53" 60-61"	51 60 69	— — —	24.94 29.24 33.54
DIRECT DRIVE MODEL 82 GEAR DRIVE MODEL 81, 69	SM-8 or SL-8 (1/2")	.063	16" 20" 24" 30" 36" 42" 48" 15"*	43-44" 52-53" 61-62" 77-78" 88-89" 100-101" 112-113" 61-62"	43 52 61 77 88 100 112 61	— — — — — — — —	18.92 22.97 26.66 33.54 38.27 43.43 48.59 26.66
GEAR DRIVE MODELS 3A, 3-1/2D, 30, 34, 35, 36, 44A, 46A, 51	SM-8 or SL-8 (1/2")	.063	16" 20" 24"	43-44" 54-55" 63-64"	43 54 63	— — —	18.92 23.65 27.52
MODELS 5, 5A, 5B	SM-8 or SL-8 (1/2")	.063	20" 24" 30" 36"	52-53" 64-65" 76-77" 88-89"	52 64 76 88	— — — —	22.79 27.95 33.11 38.27
MALL (SEE REMINGTON)							
MIDWEST MOWER CORP.							
DIRECT DRIVE MODELS EVERSHPARP MARK IV, MARK VI, 227	SM-7 or SL-7 (7/16")	.063	16" 20" 24" 30"	44-45" 52-53" 60-61" 72-73"	51 60 69 83	— — — —	19.35 22.79 26.23 31.39
MODEL MARK IV	SM-65 or SL-65 (.404")	.063	16" 20" 24" 30"	44-45" 52-53" 60-61" 72-73"	55 65 75 90	— — — —	19.35 22.79 26.23 31.39
MODELS 226, 400, MARK IV	SM-8 or SL-8 (1/2")	.063	16" 20" 22" 24" 30"	44-45" 52-53" 56-57" 60-61" 72-73"	44 52 56 60 72	— — — — —	19.35 22.79 24.51 26.23 31.39
MITCHELL							
DIRECT DRIVE MARK 3-16, 4-16, 4-20, 6-20, 6-25, 7-20, 7-25, 45-20, 55-20, 65-20, 65-25	SM-7 or SL-7 (7/16")	.063	16" 20" 25" 30"	43-44" 52-53" 64-65" 76-77"	50 60 74 88	— — — —	18.92 22.79 27.95 33.54
(Same)	SM-8 or SL-8 (1/2")	.063	16" 20" 25" 30"	43-44" 52-53" 64-65" 76-77"	43 52 64 76	— — — —	18.92 22.79 27.95 33.11
MONARK SILVER KING							
MODELS SK 18, SK 18D, SK22, SK22D, SKM-18	SM-8 or SL-8 (1/2")	.058	18" 22"	48-49" 56-57"	48 56	— —	21.07 24.51
(Same)	SM-65 or SL-65 (.404")	.058	18" 22"	48-49" 56-57"	60 70	— —	21.07 24.51
(Same)	SM-7 or SL-7 (7/16")	.058	18" 22"	48-49" 56-57"	56 65	60840 (SM) —	19.50 24.51
MODELS 47, 81	SM-8 or SL-8 (1/2")	.058	18" 22" 30"	52-53" 60-61" 76-77"	52 60 76	— — 60576 (SM) 60880 (SL)	22.79 26.23 32.85 32.85

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

* Bow

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
MONARK SILVER KING (Continued) MODELS 47, 81	SM-7 or SL-7 (7/16")	.058	18"	52-53"	60	60842 (SM)	\$ 22.75
			22"	60-61"	69	60998 (SL)	22.75
			30"	76-77"	87	—	26.23
						60848 (SM)	32.85
						61004 (SL)	32.85
MONO DIRECT DRIVE ALL MODELS (Same)	SM-7 or SL-7 (7/16")	.063	16"	44-45"	51	—	19.35
			20"	52-53"	60	—	22.79
			24"	61-62"	70	—	26.66
			14"*	63-64"	72	—	27.52
	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	19.35
			20"	52-53"	52	—	22.79
			24"	61-62"	61	—	26.66
MONTGOMERY WARD DIRECT DRIVE MODELS WD-45, WD-55 (Same) (Same) (Same) GEAR DRIVE MODEL WR-550 (Same)	SM-8 or SL-8 (1/2")	.058	16"	50-51"	50	—	21.93
			20"	58-59"	58	—	25.37
			26"	70-71"	70	—	30.53
	SM-7 or SL-7 (7/16")	.058	16"	50-51"	58	—	21.93
			20"	58-59"	67	—	25.37
			26"	70-71"	80	—	30.53
	SM-65 or SL-65 (.404")	.058	16"	49-50"	61	—	21.50
			20"	57-58"	71	—	24.94
			26"	69-70"	86	—	30.10
	SM-8 or SL-8 (1/2")	.058	16"	49-50"	49	60560 (SM)	19.50
						60875 (SL)	19.50
			20"	57-58"	57	—	24.94
			26"	69-70"	69	—	30.10
			30"	74-75"	74	—	32.25
			36"	86-87"	86	—	37.41
			42"	99-100"	99	60580 (SM)	43.15
	SM-9 (9/16")	.058	16"	49-50"	44	—	21.50
			20"	57-58"	51	—	24.94
			26"	69-70"	62	60513 (SM)	29.40
			30"	74-75"	66	—	32.25
			36"	86-87"	77	—	37.41
			42"	99-100"	88	—	43.00
PIONER (IEL) DIRECT DRIVE MODELS HA, HB, HC, HM, RA, 400, 600 (Same) (Same)	SM-65 or SL-65 (.404")	.058	16"	44-45"	55	—	19.35
			20"	51-52"	64	—	22.36
			24"	57-58"	71	—	24.94
			28"	67-68"	83	—	29.24
			32"	80-81"	100	—	34.83
	SM-7 or SL-7 (7/16")	.058	16"	44-45"	51	—	19.35
			20"	51-52"	59	—	22.36
			24"	57-58"	66	—	24.94
			28"	68-69"	78	—	29.24
			32"	80-81"	92	—	34.83
	SM-8 or SL-8 (1/2")	.058	16"	44-45"	44	60554 (SM)	18.90
						60874 (SL)	18.90
			20"	52-53"	52	—	22.79
			24"	58-59"	58	—	25.37
			28"	68-69"	68	—	29.67
	SM-8 or SL-8 (1/2")	.058	32"	80-81"	80	—	34.83
GEAR DRIVE MODELS PIONEER AND SUPER PIONEER (Same)	SM-8 or SL-8 (1/2")	.058	18"	51-52"	51	60562 (SM)	22.75
			24"	61-62"	61	—	26.66
			30"	72-73"	72	—	31.39
			36"	88-89"	88	—	38.27
			40"	96-97"	96	—	41.71
	SM-9 (9/16")	.058	18"	51-52"	46	—	22.36
			24"	60-61"	54	—	26.23
			30"	73-74"	65	—	31.82
			36"	87-88"	78	—	37.84
			40"	96-97"	86	—	41.71

**Manufacturers Suggested List Price.
Specifications subject to change without notice.

* Bow

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
PORTER-CABLE DIRECT DRIVE MODELS 530, 534	SM-7 or SL-7 (7/16")	.058	14"	42-43"	48	—	\$18.49
			16"	44-45"	51	—	19.35
			20"	52-53"	60	60842 (SM)	22.75
			24"	61-62"	70	60998 (SL)	22.75
	(Same)	.058	14"	42-43"	53	—	26.66
			16"	44-45"	55	—	18.49
			20"	52-53"	65	60663 (SM)	19.35
			24"	60-61"	75	60807 (SL)	22.75
	SM-8 or SL-8 (1/2")	.058	14"	42-43"	42	—	26.23
			16"	44-45"	44	60554 (SM)	18.49
			20"	52-53"	52	60874 (SL)	18.90
			24"	60-61"	60	—	22.79
POULAN DIRECT DRIVE MODELS H100, H200, KD100 GEAR DRIVE MODEL K100	SM-7 or SL-7 (7/16")	.063	12"	35-36"	40	—	15.48
			14"	42-43"	48	—	18.49
			18"	49-50"	56	—	21.50
			22"	56-57"	64	—	24.51
			26"	63-64"	72	—	27.52
			10"*	68-69"	78	—	29.67
			14"*	56-57"	64	—	24.51
			15"*	63-64"	72	—	27.52
	(Same)	.063	16"*	63-64"	72	—	27.52
			14"	42-43"	42	—	18.49
			18"	49-50"	49	—	21.50
			22"	56-57"	56	—	24.51
			26"	63-64"	63	—	27.52
			10"*	68-69"	68	—	29.67
			14"*	56-57"	56	—	24.51
			16"*	63-64"	63	—	27.52
	SM-7 or SL-7 (7/16")	.063	14"	42-43"	49	—	18.49
			18"	49-50"	57	—	21.50
			22"	56-57"	65	—	24.51
			26"	63-64"	73	—	27.52
	SM-8 or SL-8 (1/2")	.063	14"	44-45"	44	—	19.35
			18"	52-53"	52	—	22.79
			22"	60-61"	60	—	26.23
			26"	68-69"	68	—	29.67
			30"	76-77"	76	—	33.11
			10"*	68-69"	68	—	29.67
			15"*	60-61"	60	—	26.23
			16"*	64-65"	64	—	27.95
			20"*	72-73"	72	—	31.39
			21"*	72-73"	72	—	31.39
POWER MACHINERY, LTD. DIRECT DRIVE MODEL CANADIEN 21, SUPER 21	SM-65 or SL-65 (.404")	.058	18"	48-49"	60	60661 (SM)	19.50
			24"	60-61"	75	60805 (SL)	19.50
			30"	72-73"	90	—	26.23
						—	31.39
	SM-8 or SL-8 (1/2")	.058	16"	48-49"	48	—	21.07
			18"	52-53"	52	—	22.79
			24"	64-65"	64	60568 (SM)	28.10
			30"	76-77"	76	60576 (SM)	32.85
						60880 (SL)	32.85
			36"	88-89"	88	—	38.27
			42"	101-102"	100	—	43.43
			48"	113-114"	112	—	54.61

**Manufacturers Suggested List Price.
Specifications subject to change without notice.

* Bow

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
POWER MACHINERY, LTD. (Continued)							
GEAR DRIVE MODELS 3 ELECTRIC, ELECTROBOSS MK111	SM-65 or SL-65 (.404")	.058	12"	41-42"	51	—	\$18.06
			17"	48-49"	60	60661 (SM)	19.50
			23"	60-61"	75	60805 (SL)	19.50
						—	26.23
MODEL ROCKET	SM-8 or SL-8 (1/2")	.063	18"	49-50"	49	—	21.50
			26"	67-68"	67	—	29.24
			32"	81-82	81	—	35.26
REED PRENTICE							
GEAR DRIVE MODELS RITEWAY, 2-4, TIMBERHOG, BANTAM	SM-8 or SL-8 (1/2")	.058	18"	48-49"	48	—	21.07
			22"	56-57"	56	—	24.51
MODEL 50	SM-9 (9/16")	.063	14"	44-45"	40	—	19.78
			20"	59-60"	53	—	25.80
			24"	67-68"	60	—	29.24
			30"	78-79"	70	—	33.97
			36"	91-92"	81	—	39.56
			48"	113-114"	101	—	49.02
REMINGTON (MALL)							
DIRECT DRIVE MODELS 4MG, GP, SL-S, GL-7, SILVER & GOLDEN LOGMASTER, BANTAM	SM-7 or SL-7 (7/16")	.058	18"	49-50"	57	—	21.50
			24"	63-64"	72	—	27.52
			30"	77-78"	88	—	33.54
			36"	89-90"	102	—	38.70
SUPER 65, SUPER 75, SUPER 75A, SUPER 660, SUPER 770, SUPER 880, BANTAM G, SUPER 75G, SUPER 660G, SUPER 770G, SUPER 880G, PRO 88, IMPROVED PRO 88	SM-65 or SL-65 (.404")	.058	18"	50-51"	62	—	21.93
			24"	63-64"	78	—	27.52
			30"	77-78"	96	—	33.54
			36"	89-90"	111	—	38.70
	SM-8 or SL-8 (1/2")	.058	18"	49-50"	49	60560 (SM)	19.50
			24"	63-64"	63	60875 (SL)	19.50
						60566 (SM)	26.85
						60877 (SL)	26.85
						—	33.54
	SM-9 (9/16")	.058	18"	49-50"	44	—	21.50
			24"	63-64"	56	—	27.52
			30"	76-77"	68	60515 (SM)	32.85
			36"	90-91"	80	—	39.13
			42"	99-100"	88	—	43.00
(Same)	SM-8 or SL-8 (1/2")	.058	54"	126-127"	112	—	54.61
			18"	49-50"	49	60560 (SM)	19.50
			24"	63-64"	63	60875 (SL)	19.50
						60566 (SM)	26.85
						60877 (SL)	26.85
(Same)	SM-7 or SL-7 (7/16")	.058	30"	77-78"	77	—	33.54
			36"	89-90"	89	—	38.70
			42"	98-99"	98	—	42.57
			54"	126-127"	125	—	54.18
			(Same)	SM-8 or SL-8 (1/2")	.058	18"	49-50"
24"	63-64"	72				60844 (SM)	26.85
30"	77-78"	88				61000 (SL)	26.85
36"	89-90"	102				—	33.54
ELECTRIC MODELS 11-E12, 11-E12D	SM-8 or SL-8 (1/2")	.058	12"	40-41"	40	—	17.63
			12"	40-41"	36	—	17.63
(Same)	SM-9 (9/16")	.058	12"	40-41"	36	—	17.63

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
REMINGTON (MALL) (Continued)							
11-E18, 11-E18D	SM-8 or SL-8 (1/2")	.058	18"	49-50"	49	60560 (SM) 60875 (SL)	\$ 19.50 19.50
(Same)	SM-9 (9/16")	.058	18"	49-50"	44	—	21.50
MODEL 2E, 3E	SM-8 or SL-8 (1/2")	.058	18" 24" 36"	49-50" 64-65" 101-102"	49 64 100	— — —	19.50 27.95 43.43
ROTOTILLER							
MODELS GS-45-D, 57-D, 57-R	SM-8 or SL-8 (1/2")	.058	16" 20" 26"	44-45" 52-53" 64-65"	44 52 64	60554 (SM) 60874 (SL) — 60568 (SM)	18.90 18.90 22.79 28.10
SKARIE							
MODEL 18-1 CHAIN LIGHTNING	SM-8 or SL-8 (1/2")	.058	18"	55-56"	55	—	24.08
STEPHEN (ALMART)							
MODEL COBRA	SM-7 or SL-7 (7/16")	.063	14" 16" 20" 24" 30"	40-41" 43-44" 52-53" 60-61" 72-73"	46 50 60 69 83	— — — — —	17.63 18.92 22.79 26.23 31.39
(Same)	SM-65 or SL-65 (.404")	.063	14" 16" 20" 24" 30"	40-41" 44-45" 52-53" 60-61" 72-73"	50 55 65 75 90	— — — — —	17.63 19.35 22.79 26.23 31.39
(Same)	SM-8 or SL-8 (1/2")	.063	16" 20" 22" 24" 30"	44-45" 52-53" 56-57" 60-61" 72-73"	44 52 56 60 72	— — — — —	19.35 22.79 24.51 26.23 31.39
STIHL							
DIRECT DRIVE MODEL LIGHTNING	SM-65 or SL-65 (.404")	.063	17" 21" 25" 28" 32" 36"	51-52" 57-58" 67-68" 70-71" 80-81" 89-90"	64 71 83 87 100 111	— — — — — —	22.36 24.94 29.24 30.53 34.83 38.70
(Same)	SM-8 or SL-8 (1/2")	.063	17" 21" 25" 28" 32" 36"	51-52" 57-58" 67-68" 70-71" 80-81" 89-90"	51 57 67 70 80 89	— — — — — —	22.36 24.94 29.24 30.53 34.83 38.70
(Same)	SM-7 or SL-7 (7/16")	.063	17" 21" 25" 28" 32" 36"	51-52" 57-58" 67-68" 70-71" 80-81" 89-90"	59 66 77 81 92 102	— — — — — —	22.36 24.94 29.24 30.53 34.83 38.70
STRUNK							
ALL MODELS	SM-8 or SL-8 (1/2")	.058	16" 19" 24" 30"	45-46" 53-54" 65-66" 76-77"	45 53 65 76	— 60564 (SM) 60876 (SL) — 60576 (SM) 60880 (SL)	19.78 22.75 22.75 28.38 32.85 32.85

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
STRUNK (Continued)							
(ALL MODELS)	SM-8 or SL-8 (1/2")	.063	16"	45-46"	45	—	\$ 19.79
			19"	53-54"	53	—	23.22
			24"	65-66"	65	—	28.38
			30"	76-77"	76	—	33.11
(Same)	SM-7 or SL-7 (7/16")	.058	16"	45-46"	52	—	19.79
			19"	53-54"	61	—	23.22
			24"	64-65"	74	—	27.95
			30"	76-77"	87	60848 (SM) 61004 (SL)	32.85 32.85
(Same)	SM-7 or SL-7 (7/16")	.063	16"	45-46"	52	—	19.79
			19"	53-54"	61	—	23.22
			24"	64-65"	74	—	27.95
			30"	76-77"	87	—	33.11
(Same)	SM-65 or SL-65 (.404")	.058	16"	45-46"	56	—	19.79
			19"	53-54"	66	—	23.22
			24"	65-66"	81	—	27.95
			30"	76-77"	95	—	33.11
(Same)	SM-65 or SL-65 (.404")	.063	16"	45-46"	56	—	19.79
			19"	53-54"	66	—	23.22
			24"	65-66"	81	—	27.95
			30"	76-77"	95	—	33.11
TERRILL							
MODELS CS5, CS6 DIRECT DRIVE MODELS 50, 60	SM-8 or SL-8 (1/2")	.063	14"	44-45"	44	—	19.35
			18"	52-53"	52	—	22.79
			24"	64-65"	64	—	27.95
			30"	75-76"	75	—	32.68
			36"	87-88"	87	—	37.84
			42"	98-99"	98	—	42.57
(Same)	SM-9 (9/16")	.063	18"	51-52"	46	—	22.36
			24"	64-65"	57	—	27.95
			30"	75-76"	67	—	32.68
			36"	87-88"	78	—	37.84
			42"	99-100"	88	—	43.00
			50"	115-116"	103	—	49.88
			60"	130-131"	116	—	56.33
			TITAN				
DIRECT DRIVE MODELS 4400, 4500, 4800, 4900, 5000, 5400, LITTLE GAIANT 4016, FLEETWOOD 7400, 7500	SM-7 or SL-7 (7/16")	.063	14"	41-42"	47	—	18.06
			16"	44-45"	51	—	19.35
			20"	52-53"	60	—	22.79
			24"	60-61"	69	—	26.23
			30"	72-73"	83	—	31.39
GEAR DRIVE 4600	SM-8 or SL-8 (1/2")	.063	14"	41-42"	41	—	18.06
			16"	44-45"	44	—	19.35
			20"	52-53"	52	—	22.79
			24"	60-61"	60	—	26.23
			30"	72-73"	72	—	31.39
MODELS 4900, 5000, 5400, LITTLE GAIANT 4016	SM-65 or SL-65 (.404")	.063	14"	41-42"	51	—	18.06
			16"	44-45"	55	—	19.35
			20"	52-53"	65	—	22.79
			24"	60-61"	75	—	26.23
			30"	72-73"	90	—	31.39
GEAR DRIVE MODELS 4700, 5100, 5200, 5300	SM-8 or SL-8 (1/2")	.063	16"	44-45"	44	—	19.35
			20"	52-53"	52	—	22.79
			25"	64-65"	64	—	27.95
			31"	76-77"	76	—	33.11
			37"	88-89"	88	—	38.27
			Bow	64-65"	64	—	27.95
			(Same)	SM-9 (9/16")	.063	16"	45-46"
20"	52-53"	47				—	22.79
25"	64-65"	57				—	27.95
31"	76-77"	68				—	23.11
37"	88-89"	79				—	38.27
Bow	64-65"	57				—	27.95

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
TITAN (Continued)							
MODEL 85	SM-8 or SL-8 (1/2")	.063	25"	64-65"	64	—	\$ 27.95
			29"	72-73"	72	—	31.39
			31"	76-77"	76	—	33.11
			37"	88-89"	88	—	38.27
			42"	100-101"	100	—	43.43
			48"	113-114"	112	—	48.59
			50"	117-118"	116	—	50.31
(Same)	SM-9 (9/16")	.063	25"	64-65"	57	—	27.95
			29"	72-73"	64	—	31.39
			31"	76-77"	68	—	33.11
			37"	88-89"	79	—	38.27
			42"	100-101"	89	—	43.43
			48"	113-114"	101	—	48.59
			50"	117-118"	104	—	50.31
DIRECT DRIVE MODELS 30, 30A	SM-8 or SL-8 (1/2")	.063	14"	44-45"	44	—	19.35
			18"	52-53"	52	—	22.79
			22"	60-61"	60	—	26.23
(Same)	SM-7 or SL-7 (7/16")	.063	14"	44-45"	51	—	19.35
			18"	52-53"	60	—	22.79
			22"	60-61"	69	—	26.23
GEAR DRIVE MODELS 40, 45, 60, 65, 70, 75, SPORTSMAN 200	SM-8 or SL-8 (1/2")	.058	14"	42-43"	42	—	18.49
			18"	52-53"	52	—	22.79
			22"	58-59"	58	—	25.37
			26"	66-67"	66	—	28.81
			32"	78-79"	78	—	33.97
			36"	88-89"	88	—	38.27
			44"	105-106"	104	—	45.15
			48"	113-114"	112	—	48.59
			54"	126-127"	125	—	54.18
			60"	137-138"	136	—	58.91
(Same)	SM-8 or SL-8 (1/2")	.063	14"	42-43"	42	—	18.49
			18"	52-53"	52	—	22.79
			22"	58-59"	58	—	25.37
			26"	66-67"	66	—	28.81
			32"	78-79"	78	—	33.97
			36"	88-89"	88	—	38.27
			44"	105-106"	104	—	45.15
			48"	113-114"	112	—	48.59
			54"	126-127"	125	—	54.18
			60"	137-138"	136	—	58.91
(Same)	SM-9 (9/16")	.058	14"	42-43"	38	—	18.49
			18"	52-53"	47	60505 (SM)	22.75
			22"	58-59"	52	—	25.37
			26"	66-67"	59	—	28.81
			32"	78-79"	70	—	33.97
			36"	88-89"	79	60519 (SM)	37.75
			44"	105-106"	94	—	45.15
			48"	113-114"	101	—	48.59
			54"	126-127"	112	—	54.18
			60"	137-138"	122	60525 (SM)	58.91
(Same)	SM-9 (9/16")	.063	14"	42-43"	38	—	18.49
			18"	52-53"	47	—	22.79
			22"	58-59"	52	—	25.37
			26"	66-67"	59	—	28.81
			32"	78-79"	70	—	33.97
			36"	88-89"	79	—	38.27
			44"	105-106"	94	—	45.15
			48"	113-114"	101	—	48.59
			54"	126-127"	112	—	54.18
			60"	137-138"	122	—	60.00
WHITEHEAD							
DIRECT DRIVE MODELS 20, 20B, 21, 200, 210, 106, 104, 105, 107, 108, 119, 120	SM-7 or SL-7 (7/16")	.063	17"	45-46"	52	—	19.79
			20"	52-53"	60	—	22.79
			24"	59-60"	68	—	25.80
			15"*	64-65"	74	—	27.95

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

MAKE & MODEL OF SAW	CHAIN TYPE (PITCH)	CHAIN GAUGE	BAR CUTTING CAPACITY	CHAIN LENGTH	NUMBER CENTER LINKS	McCULLOCH PART NUMBER	SUGGESTED LIST PRICE **
WHITEHEAD (Continued)							
DIRECT DRIVE MODELS 20, 20B, 21, 200, 210, 106, 104, 105, 107, 108, 119, 120	SM-8 or SL-8 (1/2")	.063	17"	45-46"	45	—	\$19.79
			20"	52-53"	52	—	22.79
			24"	59-60	59	—	25.80
			15"*	64-65	64	—	27.95
GEAR DRIVE MODEL 22, 220	SM-8 or SL-8 (1/2")	.063	18"	52-53"	52	—	22.79
			24"	64-65"	64	—	27.95
			30"	76-77"	76	—	33.11
			36"	88-89"	88	—	38.27
MODEL 220B	SM-8 or SL-8 (1/2")	.063	17"	44-45"	44	—	19.35
			20"	52-53"	52	—	22.79
			23"	59-60"	59	—	25.80
			28"	68-69"	68	—	29.67
			15"*	64-65"	64	—	27.95
MODEL 206, 206B 207, 208	SM-8 or SL-8 (1/2")	.063	17"	46-47"	46	—	20.21
			20"	53-54"	53	—	23.22
			24"	61-62"	61	—	26.66
			28"	68-69"	68	—	29.67
			15"*	64-65"	64	—	27.95
WRIGHT SAWS (Thomas Industries, Inc.) C-50, C-70	SM-65 or SL-65 (.404")	.063	14"	43-45"	54	—	18.92
			17"	50-52"	63	—	21.93
			21"	57-59"	71	—	24.94
			25"	66-67"	82	—	28.81
(Same)	SM-7 or SL-7 (7/16")	.063	14"	43-45"	50	—	18.92
			17"	50-52"	58	—	21.93
			21"	57-59"	67	—	24.94
			25"	66-67"	76	—	28.81
Same)	SM-8 or SL-8 (1/2")	.063	14"	43-45"	44	—	18.92
			17"	50-52"	51	—	21.93
			21"	57-59"	58	—	24.94
			25"	66-67"	66	—	28.81

**Manufacturers Suggested List Price.

Specifications subject to change without notice.

* Bow

SUPER-MAC CHAIN REPAIR PARTS

Part Name	SM-65	SM-7	SM-8	SM-9	SL-65	SL-7	SL-8	Price*
R.H. Cutter	60640	60640	60490	60486	60680	60680	60795	.50
L.H. Cutter	60639	60639	60489	60485	60679	60679	60794	.50
R.H. Cutter Assy.	60677	60677	—	—	60993	60993	—	.60
Side Link	60736	60736	56429	28474	60736	60736	56429	.10
Preset Side Link	60655	60655	56556	28874	60655	60655	56556	.20
Central Link .058	60549	60834	60488	60487	60549	60834	60488	.15
Center Link .063	60721	60833	60547	60546	60721	60833	60547	.15
Rivet	52453	52453	28837	28379	52453	52453	28837	.05
Master Pin	52454	52454	28392	28392	52454	52454	28392	.10
L.H. Master Link	60654	60654	56509	28475	60654	60654	56509	.15
Preset R.H. Master Link	60652	60652	56557	28877	60652	60652	56557	.20
Repair Kit .058	60656	60832	60551	60540	60656	60832	60551	.60
Repair Kit .063	60687	60934	60598	60548	60687	60934	60598	.60

*Manufacturers suggested list price

McCULLOCH CHAIN REELS

More and more dealers and customers purchase McCulloch chain in reels and then cut their own chain lengths. By doing so, they always have the right length of chain on hand and are taking advantage of the extra savings involved in buying reels over cut lengths.

When cutting chain from reels, always refer to the measurements or number of center links listed under each chain type. Each reel of chain includes a quantity of master links and repair kits for making up cut lengths.

SM CHAIN

Type	Length	Part No.	Price*	No. of Repair Kits
SM65	25'	60671	128.75	6
(.058" Gauge	50'	60673	253.00	12
Full Complement)	100'	60675	495.00	24
SM65-63	25'	60681	128.75	6
.063" Gauge	50'	60683	253.00	12
Full Complement	100'	60685	495.00	24
SM65 Skiptooth	25'	60696	128.75	6
(.058" Gauge)	50'	60698	253.00	12
	100'	60700	495.00	24
SM65 Skiptooth	25'	60689	128.75	6
(.063" Gauge)	50'	60691	253.00	12
	100'	60693	495.00	24
SM65 Semi-Skiptooth	25'	60710	128.75	6
(.058" Gauge)	50'	60712	253.00	12
	100'	60714	495.00	24
SM65 Semi-Skiptooth	25'	60703	128.75	6
(.063" Gauge)	50'	60705	253.00	12
	100'	60707	495.00	24
SM8	25'	60582	128.75	6
(.058" Gauge)	50'	60584	253.00	12
	100'	60586	495.00	24
SM8-63	25'	60592	128.75	6
(.063" Gauge)	50'	60594	253.00	12
	100'	60596	495.00	24
SM9	25'	60527	128.75	6
	50'	60529	253.00	12
(.058" Gauge)	100'	60531	495.00	24
SM9-63	25'	60535	128.75	6
.063" Gauge	50'	60537	253.00	12
	100'	60539	495.00	24
SM-7	25'	60850	128.75	6
(.058" Gauge)	50'	60718	253.00	12
	100'	60720	495.00	24
SM7-63	25'	60788	128.75	6
(.063" Gauge)	50'	60790	253.00	12
	100'	60792	495.00	24

SL CHAIN

SL65	25'	60815	128.75	6
(.058 Gauge)	50'	60817	253.00	12
	100'	60819	495.00	24
SL65-63	25'	61010	128.75	6
(.063 Gauge)	50'	61012	253.00	12
	100'	61014	495.00	24
SL7	25'	60861	128.75	6
(.058 Gauge)	50'	60863	253.00	12
	100'	60865	495.00	24
SL7-63	25'	60852	128.75	6
(.063 Gauge)	50'	60854	253.00	12
	100'	60856	495.00	24
SL8	25'	60881	128.75	6
(.058 Gauge)	50'	60882	253.00	12
	100'	60883	495.00	24
SL8-63	25'	60867	128.75	6
(.063" Gauge)	50'	60868	253.00	12
	100'	60869	495.00	24


"F" and "J" CHAIN

"F"	50'	24756	253.00	7
(.074" Gauge)	100'	24758	495.00	14
"J"	50'	24761	253.00	7
(.074" Gauge)	100'	24762	495.00	14


*Manufacturers suggested list price

PITCH AND GAUGE MEASUREMENT

To find the pitch of a chain measure the distance (D) between three rivets and divide by 2.

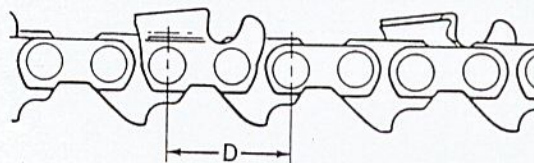

To find the gauge of a chain measure the thickness of a center link at the tang.



Selling maintenance when selling chain is good business. The reason is obvious, for a properly maintained chain lasts much longer. The longer it lasts the happier your customer will be. If he's happy, it's quite likely he'll tell other people how good you and the chain are. This all adds up to more profits for you.

Here are some important points to remember when selling a customer a new chain:

1. Make certain his bar and sprocket are in good condition.
2. Make certain his chain is installed correctly.
3. Make certain his chain is "broken-in" correctly.
4. Make certain he knows how to maintain his chain correctly.

7 NEW SUPER-MAC CHAINS TO MEET YOUR NEEDS

SM-65: .404" pitch - direct drive, for all wood types.

SM-8: 1/2" pitch - gear drive saws, for all wood types.

SL-65: .404" pitch - direct drive, for hard or frozen wood, and lower powered saws.

SL-8: 1/2" pitch - gear drive saws, for hard or frozen wood.

SM-7: 7/16" pitch - direct drive or low power saws. All wood types.


SM-9: 9/16" pitch - high powered gear saws, all wood types.

SL-7: 7/16" pitch - direct drive or low power saws. Hard or frozen wood.


McCulloch also offers "F" and "J" chains for heavy-duty two-man chain saws.

SPROCKET INFORMATION

These outlines are for McCulloch Sprockets of various pitches—to identify the pitch of a sprocket simply place the sprocket over the proper silhouette.


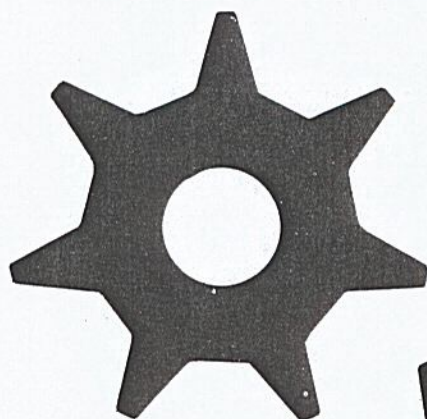


7 Tooth $\frac{7}{16}$ " Pitch
for SM-9 Chain

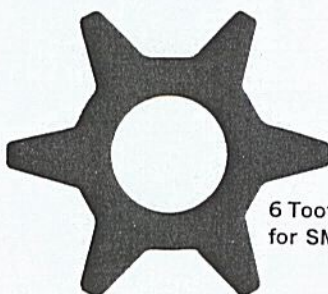


6 Tooth $\frac{1}{2}$ " Pitch
for SM-8/SL-8 Chain


6 Tooth $\frac{9}{16}$ " Pitch
for SM-9 Chain

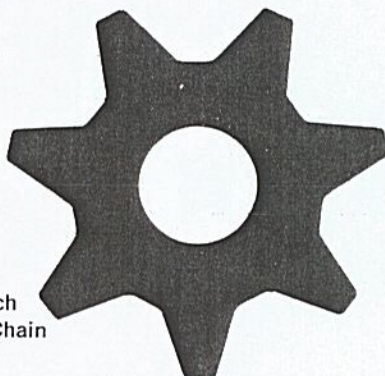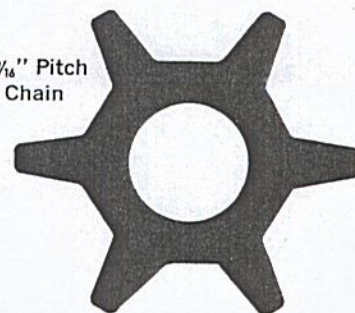

7 Tooth $\frac{1}{2}$ " Pitch
for SM-8/SL-8 Chain

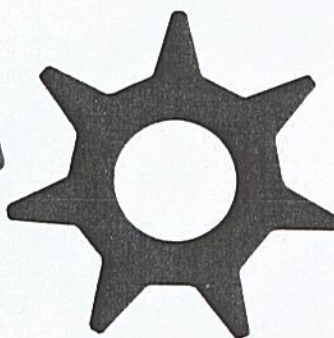

7 Tooth $\frac{7}{16}$ " Pitch
for SM-7/SL-7 Chain

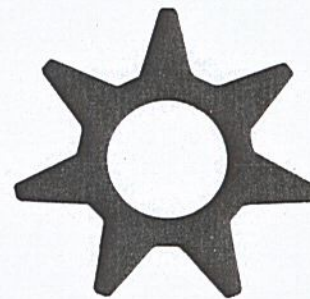

7 Tooth .404 Pitch
for SM-65/SL-65 Chain

**"LEADERSHIP THROUGH
CREATIVE ENGINEERING"**

